


AVENTICS Series DO Directional valves

The AVENTICS Series DO offer a simple, reliable and robust solution for all classical pilot control functions with direct electrical operation.



Technical data

Industry

Activation

Note

Frame size

Valve type

Basic valve equipment

Switching principle

Valve function

Sealing principle

Connection type

Manual override

Industrial

Electrically

Note: NO via port 3

DO22

Poppet valve

Basic valve without coil

3/2, with spring return

NO

Soft seal

Plate connection

without

Compressed air connection

Compressed air connection input

Compressed air connection output

Base plate

Base plate

Base plate

Nominal flow Qn

Nominal flow Qn 1 to 2

Nominal flow Qn 2 to 3

48 l/min

48 l/min

56 l/min

3/2-directional valve, Series DO22

0820046991

Series DO

2024-05-21

Min. working pressure	0 bar
Max. working pressure	10 bar
Electrical connection type	Plug
Electrical connection size	ISO 6952, form B
Protection class with connection	IP65
Coil width	22 mm
Compatibility index	14
Duty cycle	100 %
ATEX	Suitable for ATEX
Min. ambient temperature	-10 °C
Max. ambient temperature	50 °C
Min. medium temperature	-10 °C
Max. medium temperature	50 °C
Medium	Compressed air
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	5 mg/m ³
Max. particle size	5 µm
Mounting on manifold strip	PRS strip
Mounting screws	M3
Material	
Housing material	Plastic
Seal material	Fluorocautchouc
Part No.	0820046991

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

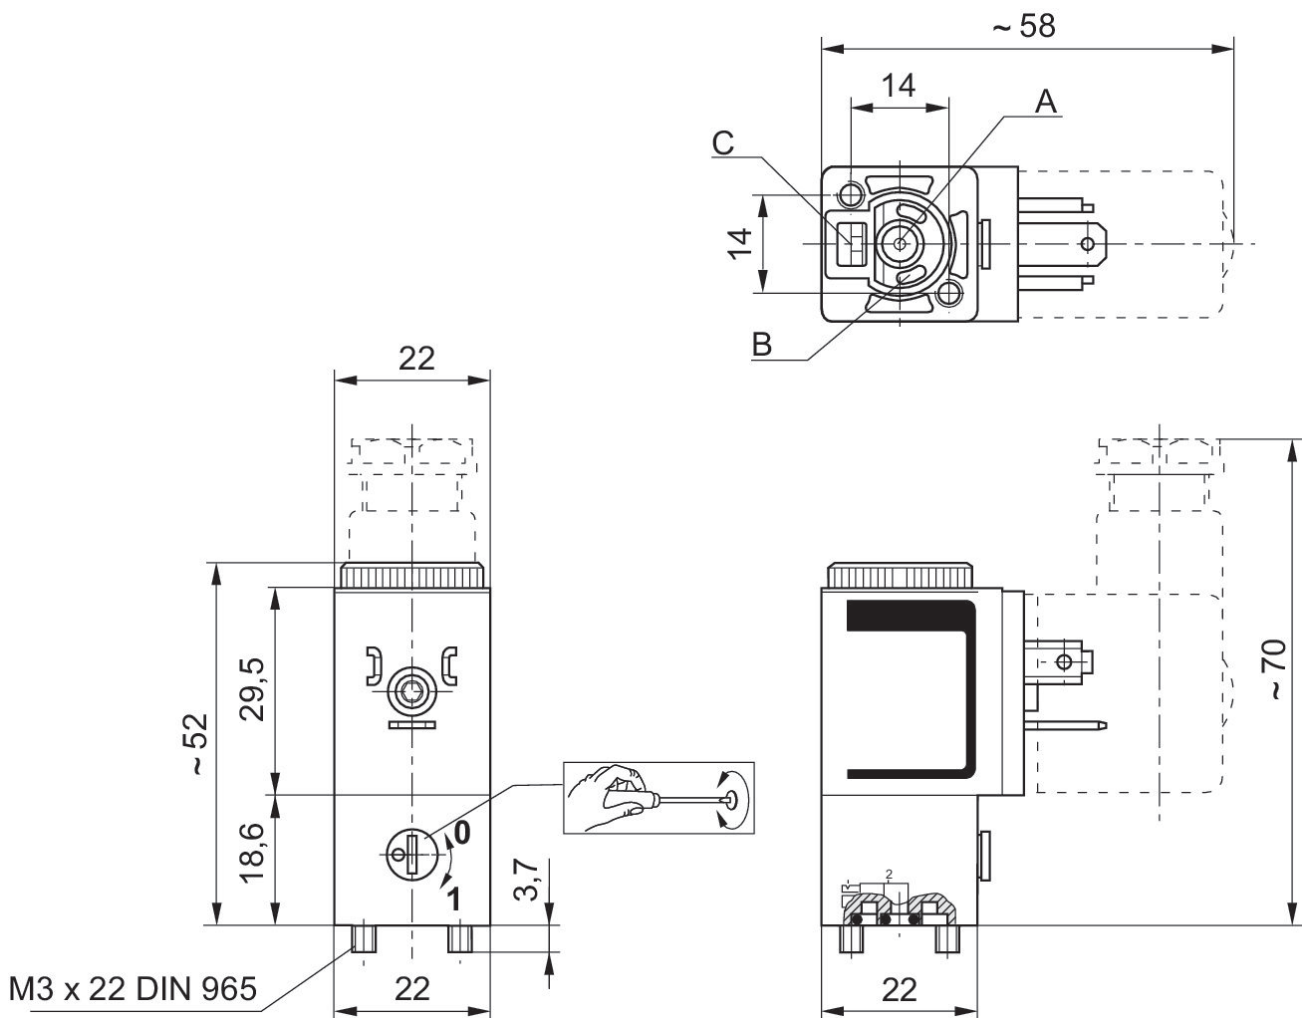

A = Port 1
B = Port 2
C = Port 3