

5/2-directional valve, Series TC08, with detent, double Solenoid

0820060221


Series
TC08

2024-10-17

- Excellent ratio of installation space and flow rate
- Large selection of electrical connections
- Electrical or pneumatic operated
- Long service life
- Adjustable coil with four 90° positions

AVENTICS Series TC08 Directional valves

The AVENTICS Series TC08/TC15 includes a wide range of spool valves with housings made of high-performance polymers with robust and flexible metal inserts. It is designed for flow rate performances from 800 to 1500 l/min. These directional valves are easy to assemble, making them ideal for applications requiring the highest efficiency in limited spaces.



Technical data

Industry

Industrial

Activation

Electrically

Valve type

Spool valve, positive overlapping

Switching principle

5/2, double solenoid

Actuating control

Double Solenoid

Sealing principle

Soft seal

Connection type

Pipe connection

Manual override

with detent

Compressed air connection input

G 1/8

Compressed air connection output

G 1/8

Compressed air connection, exhaust

G 1/8

Nominal flow Q_n

800 l/min

Flow conductance b

0.36

Flow conductance C

3.5 l/(s*bar)

Min. working pressure

2 bar

Max. working pressure

10 bar

5/2-directional valve, Series TC08, with detent, double Solenoid

Series
TC08

2024-10-17

0820060221

Min. control pressure 2 bar

Max. control pressure 10 bar

Electrical connection type	Plug
Electrical connection size	M8
Electrical connection number of poles	4-pin
Connector standard	DIN EN 60947-5-2
Protection class acc. to DIN EN 61140	Class III
Protection class with connection	IP65
Operational voltage	24 V DC
Operational voltage DC	24 V
Voltage tolerance DC	-10 % / +10 %

Pilot	Internal
Coil width	15.6 mm
Pilot valve width	15 mm
LED status display	Yellow
Power consumption DC	2.2 W
Nominal resistance	280 Ω

Duty cycle	100 %
Typ. switch-on time	10 ms
Typ. switch-off time	10 ms

Min. ambient temperature	-10 °C
Max. ambient temperature	50 °C
Min. medium temperature	-10 °C
Max. medium temperature	50 °C
Medium	Compressed air
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	5 mg/m ³
Max. particle size	5 μm

Mounting on manifold strip	P-strip
Mounting screw tightening torque	2 Nm
Weight	0.172 kg

Material

Housing material	Polyamide fiber-glass reinforced
------------------	----------------------------------

**5/2-directional valve, Series TC08, with detent,
double Solenoid**

Series
TC08

2024-10-17

0820060221

Seal material	Acrylonitrile butadiene rubber
	Polyurethane
Material threaded bushing	Brass
	Die cast zinc
Material front plate	Polyamide fiber-glass reinforced

Part No. 0820060221

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

5/2-directional valve, Series TC08, with detent, double Solenoid


Series
TC08

2024-10-17

0820060221

Dimensions

Double Solenoid

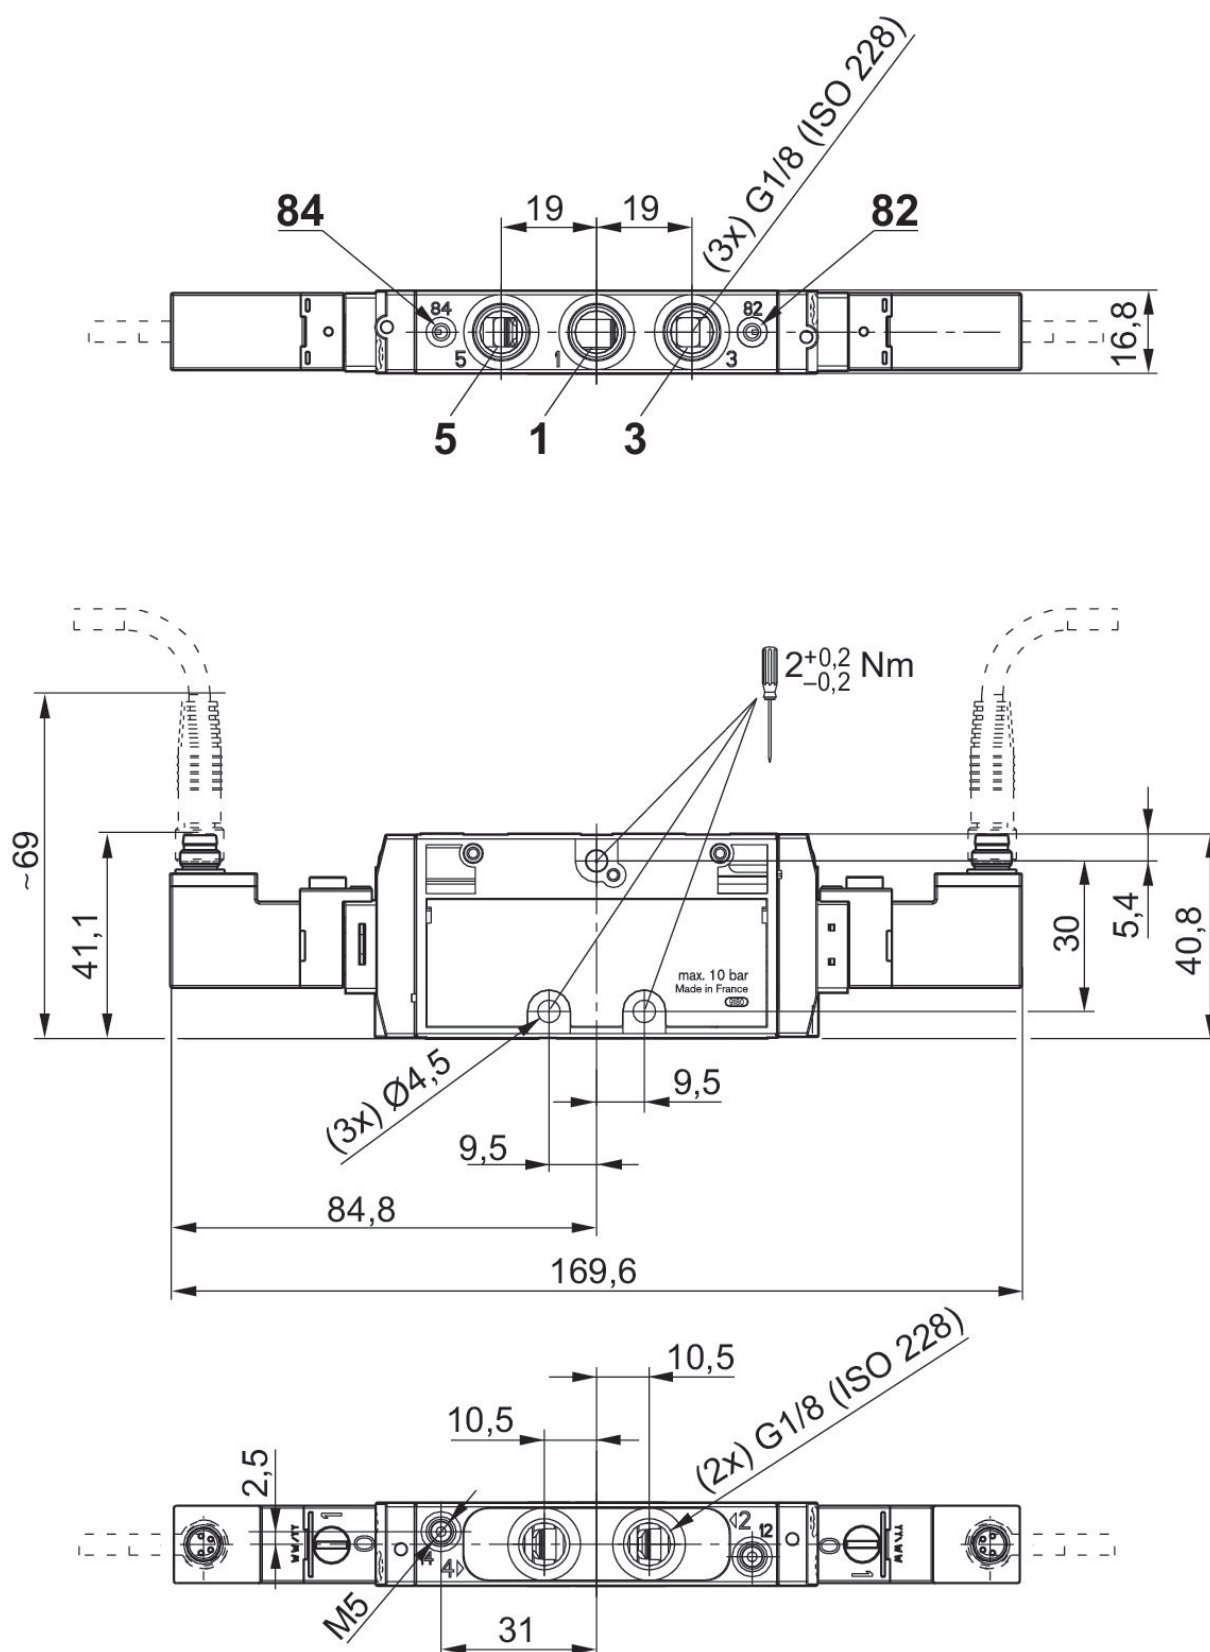


5/2-directional valve, Series TC08, with detent, double Solenoid

Series
TC08

2024-10-17

0820060221

PIN assignment and cable colors for
valve plug connectors

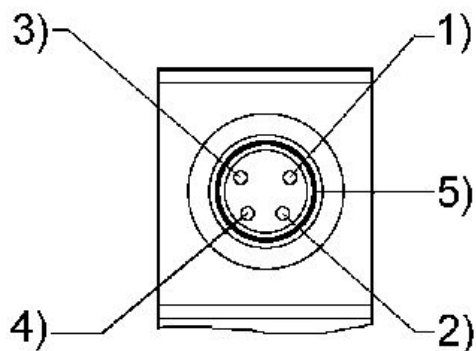

PIN assignment: 1) PIN not assigned 2) PIN not assigned 3) 0 V 4) 24 V 5)
LED Cable colors 1) Brown 2) White 3) Blue 4) Black