


# Throttle valve, Series CH02

0821201001

Series CH02

- $Q_n = [[200] \text{ l/min}] \dots [[4100] \text{ l/min}]$

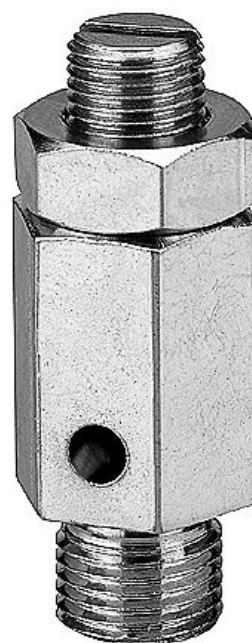

## Technical data

Industry  
Industrial

Working pressure min.  
0 bar

Working pressure max  
16 bar

Min. ambient temperature  
0 °C

Max. ambient temperature  
100 °C

Min. medium temperature  
0 °C

Max. medium temperature  
100 °C

Port 1  
G 1/8

Type  
Screw-in throttle

Medium  
Compressed air

Compressed air connection type  
External thread

Flow  $Q_n$   
475 l/min

Weight  
0.035 kg

Housing material  
Brass

Surface housing  
galvanized

Part No.  
0821201001

## Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

## Dimensions

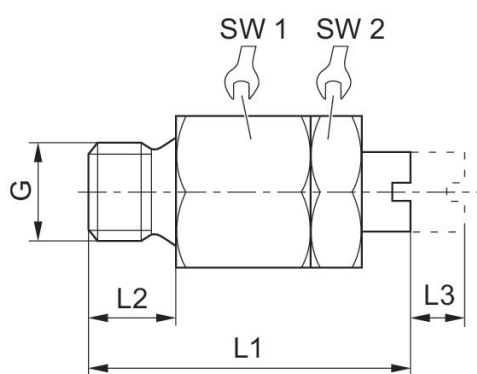

Part No.	Port G	L1	L2	L3	SW1	SW2
0821201001	G 1/8	34	8	5	13	13
0821201002	G 1/4	33	8	6.5	17	14
0821201003	G 1/2	50	10	8	27	22