


AVENTICS Series NL6 Air Preparation Units

The AVENTICS Series NL maintenance units are suitable for all areas: as individual components or as assembled maintenance units, for centralized or decentralized compressed air preparation, in compact or powerful versions, for use in high or low temperatures. This line offers a complete, customizable compressed air preparation technology. It includes an option to combine every component in the Series to achieve the desired function, making it possible to adjust the components precisely to the application requirements.

- Easy-to-assemble
- Manual, semi-automatic or fully-automatic condensate drains available
- Transparent reservoirs available
- Bayonet catches ensure easy maintenance



Technical data

Industry

Industrial

Note

Archive product: Do not use in new constructions!

Parts

Filter pressure regulator

Reservoir

reservoir, metal, with inspection glass

Port

G 1

Nominal flow Qn

15000 l/min

Filter porosity

40 µm

Condensate drain

fully automatic, open without pressure

Pressure gauge

with pressure gauge

Min. working pressure

1.5 bar

Max. working pressure

16 bar

Min. ambient temperature

-10 °C

Max. ambient temperature

60 °C

Min. regulation range

0.5 bar

Max. regulation range

10 bar

Lock type

not lockable

Type

1-part

Type

Can be assembled into blocks

Pressure supply

single

Mounting orientation	vertical
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Max. Internal air consumption	0.5 l/min
Filter element	exchangeable
Filter reservoir volume	125 cm ³
Max. achievable compressed air class acc. to ISO 8573-1:2010	7 : 7 : -
Medium	Compressed air Neutral gases
Weight	2.48 kg

Material

Housing material	Die-cast aluminum
Seal material	Acrylonitrile butadiene rubber
Material front plate	Acrylonitrile butadiene styrene
Material reservoir	Die cast zinc
Material filter insert	Polyethylene
Part No.	0821300861

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

Nominal flow Q_n with secondary pressure p₂ = 6 bar at Δp = 1 bar

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Also suitable for separation of fluid oil or water due to the design.


The rear pressure gauge connection on the pressure regulator is closed with a blanking plug, the front connection is open. Depending on the customer application, a second blanking plug may be necessary. Please order separately (see accessories).

Mounting: mounting bracket 1821336017 / block assembly kit 1827009593

Metal protective guard can be retrofitted for all polycarbonate reservoirs


Pressure gauge enclosed separately

Pressure characteristics curve

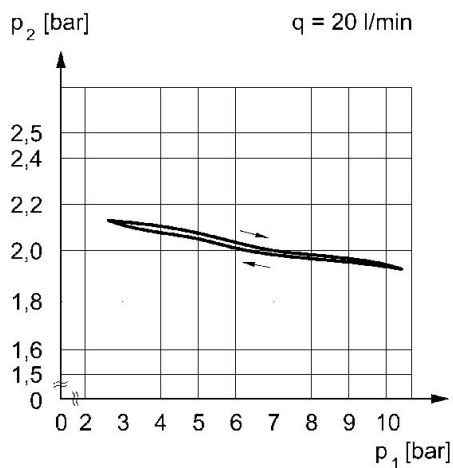

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow
 q = flow rate

Flow rate characteristic, $p_2 = 0,05 - 7$ bar

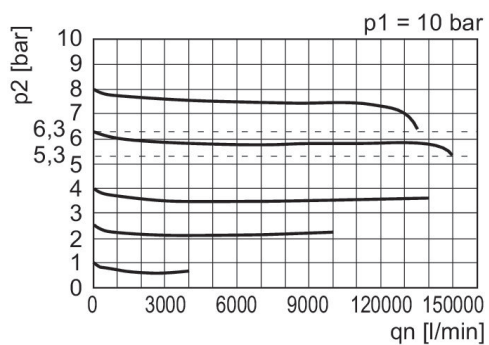

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

0821300861

2026-03-27

Technical drawing of the T6000 series pressure washer, showing front, side, and top views with dimensions in mm.

Front View Dimensions:

- Overall height: E
- Overall width: B
- Motor housing width: H
- Motor housing height: C
- Motor housing depth: V
- Motor housing width: A1
- Motor housing width: A2
- Motor housing width: W1
- Motor housing height: T2
- Overall height: D

Side View Dimensions:

- Overall width: K
- Overall height: J
- Motor housing width: L
- Motor housing height: M
- Motor housing width: A6
- Motor housing height: T6
- Overall height: W
- Motor housing width: Ø63
- Motor housing height: ~38

Top View Dimensions:

- Overall width: 105
- Overall height: 98
- Motor housing width: 68
- Motor housing height: 12
- Motor housing width: 16
- Motor housing height: 8,4
- Motor housing width: 11
- Motor housing height: 13
- Motor housing width: 16
- Motor housing height: 12
- Motor housing width: 6,4
- Motor housing height: 58
- Motor housing width: 8
- Motor housing height: 69
- Motor housing width: 55
- Motor housing height: 38
- Motor housing width: 11

Detail View A-A:

- Overall width: A7
- Overall height: T7

Trigger Gun Detail:

- Overall width: A
- Overall height: A

1) Semi-automatic condensate drain 2) fully automatic condensate drain

Filter pressure regulator, Series NL6-FRE

0821300861

Series NL6

2026-03-27

Dimensions in mm

Part No.	A1	A2	A6	A7	B	C	D	E	H	I
0821300850	G 3/4	G 3/4	G 1/4	G 1/8	100	132	253	385	58	M6
0821300851	G 3/4	G 3/4	G 1/4	G 1/8	100	132	253	385	58	M6
0821300852	G 3/4	G 3/4	G 1/4	G 1/8	100	132	253	385	58	M6
0821300853	G 3/4	G 3/4	G 1/4	G 1/8	100	132	253	385	58	M6
0821300854	G 3/4	G 3/4	G 1/4	G 1/8	100	132	253	385	58	M6
0821300855	G 3/4	G 3/4	G 1/4	G 1/8	100	132	253	385	58	M6
0821300856	G 1	G 1	G 1/4	G 1/8	100	132	253	385	58	M6
0821300857	G 1	G 1	G 1/4	G 1/8	100	132	253	385	58	M6
0821300858	G 1	G 1	G 1/4	G 1/8	100	132	253	385	58	M6
0821300859	G 1	G 1	G 1/4	G 1/8	100	132	253	385	58	M6
0821300860	G 1	G 1	G 1/4	G 1/8	100	132	253	385	58	M6
0821300861	G 1	G 1	G 1/4	G 1/8	100	132	253	385	58	M6

Part No.	J	K	L	M	T2	T6	T7	V	W	W1
0821300850	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300851	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300852	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300853	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300854	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300855	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300856	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300857	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300858	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300859	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300860	103	70.5	28	3	18	7	8.5	29	403	101.5
0821300861	103	70.5	28	3	18	7	8.5	29	403	101.5