

Series AS5

Qn = 14500 l/min



Technical data

Industry	Industrial
Max. vertical load (static)	750 N
Bending moment	10 Nm
Weight	0.03 kg
Housing material	Steel, chrome-plated
Material rubber bearing	Natural rubber
Part No.	0821305169

Technical information

Note: high-load rubber/metal connection as a swivel joint.

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Angle joint, Series AJT

0821305169

2024-04-05

Dimensions

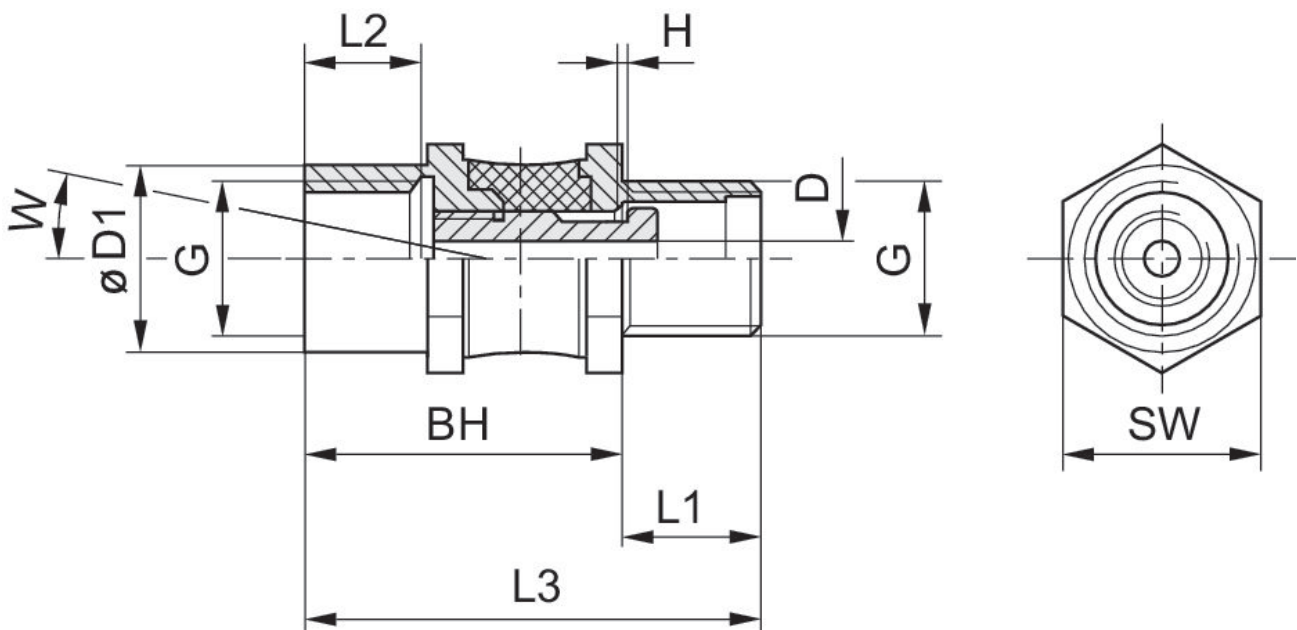

Part No.	G1	G	Ø D1	D	L1	L2	L3	BH	H
0821305168	G 1/4	M10x1,25	16	2.8	8	10.5	35	27	1.5
0821305169	G 1/4	G 1/4	16	3	12	12	39	27	1.5
0821305170	G 1/2	G 1/2	26	6	14	14	47.5	33.5	1.3

SW	W
17	12°
17	12°
27	12°