


AVENTICS Series KPZ Compact cylinders

The AVENTICS Series KPZ is a compact cylinders based on the widely used standard NFE 49 004. It offer a wide variety of variants and are suitable for a multitude of applications thanks to their sizing.

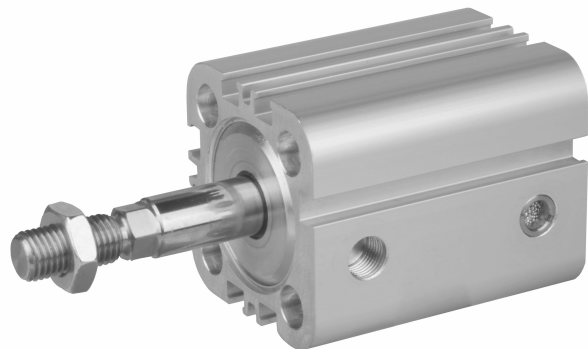

Technical data

Industry	Industrial
Standards	NFE 49004
Piston Ø	25 mm
Stroke	20 mm
Ports	M5
Functional principle	Single-acting, extended without pressure
Cushioning	elastic cushioning
Magnetic piston	Piston with magnet
Environmental requirements	Industry standard
Piston rod thread - type	External thread
Piston rod thread	M10x1,25
Piston rod	single
Scraper	Standard Industry Scraper
Pressure for determining piston forces	6,3 bar
Retracting piston force	309 N
Extracting piston force	25 N
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Min. working pressure	1.5 bar

Max. working pressure	10 bar
Impact energy	0.2 J
Weight 0 mm stroke	0.157 kg
Weight +10 mm stroke	0.02 kg
Stroke max.	25 mm
Medium	Compressed air
Min. medium temperature	-20 °C
Max. medium temperature	80 °C
Max. particle size	5 µm
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	5 mg/m ³

Material

Piston rod	Stainless Steel
Scraper material	Polyurethane
Seal material	Nitrile butadiene rubber
Material, front cover	Aluminum
Cylinder tube	Aluminum
End cover	Aluminum
Nut for piston rod	Steel, chrome-plated
Part No.	0822492303

Technical information

The material for heat-resistant scraper and seal variants (ambient temperature: -10 °C ... 120 °C) is fluorocarbon.

Further options can be generated in the Internet configurator.

LW*/SW* Hexagonal key required

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Extracting piston force



F = spring return force, s = return stroke

Overview drawing

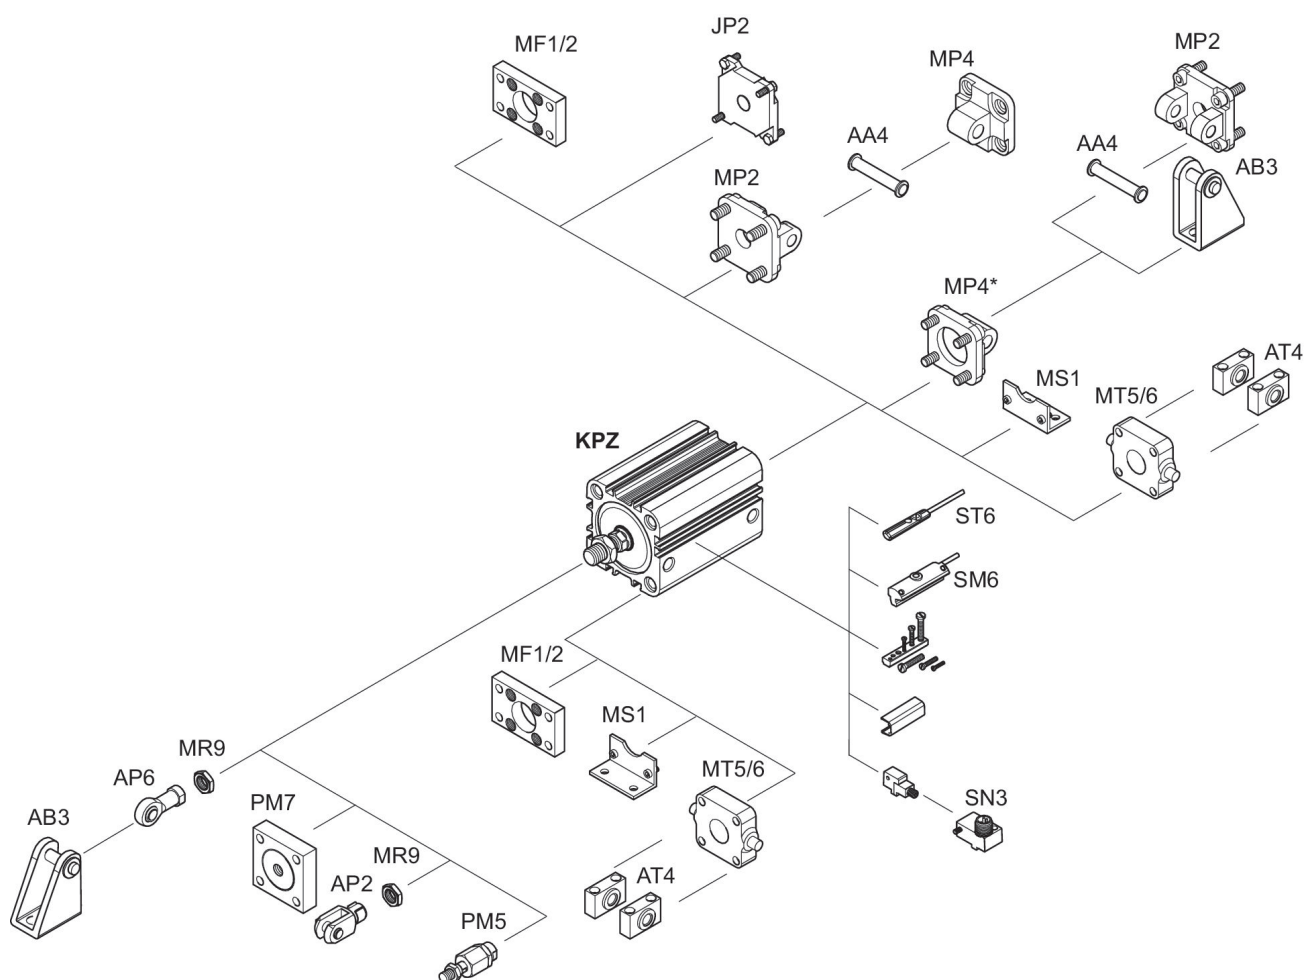

* Available for installation on KPZ for cylinder diameters 16 - 25 mm

NOTE: This overview drawing is only for orientation to indicate where the various accessory parts can be fastened to the cylinder. The illustration has been simplified for this purpose. It is thus not possible to derive the dimensions from this overview.

0822492303

2025-07-17





Technical drawing of a roller assembly, showing side and front views with dimension labels.

Side View (Top):


- AF:** Distance from the left edge to the center of the roller.
- LA:** Distance from the right edge to the center of the roller.
- EE:** Label pointing to the roller assembly.
- LW:** Width of the left support structure.
- LF:** Width of the right support structure.
- RT:** Total width of the assembly.
- Ø DA:** Outer diameter of the roller.
- Ø DT:** Inner diameter of the roller.
- KE:** Thickness of the left support structure.
- LB:** Distance from the left edge to the center of the roller.
- PL:** Distance from the center of the roller to the edge of the support structure.
- BG:** Distance from the center of the roller to the edge of the support structure.
- WH:** Width of the support structure.
- ZA+S:** Distance from the left edge to the center of the roller.
- ZB+S:** Distance from the right edge to the center of the roller.

Front View (Bottom):

- LW:** Width of the left support structure.
- WH+S:** Total width of the support structure.
- EE:** Label pointing to the roller assembly.
- 1):** Label pointing to the roller assembly.

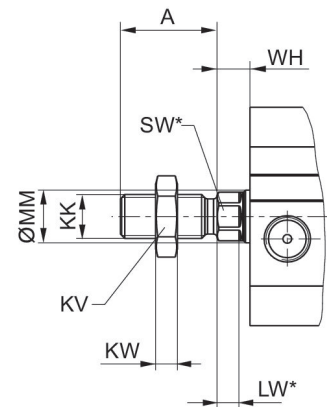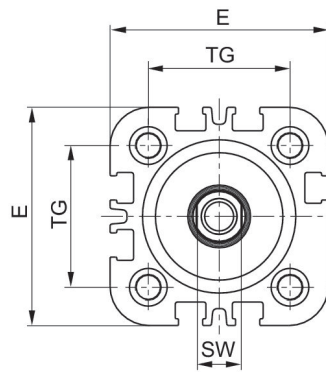

Ø63 - 100

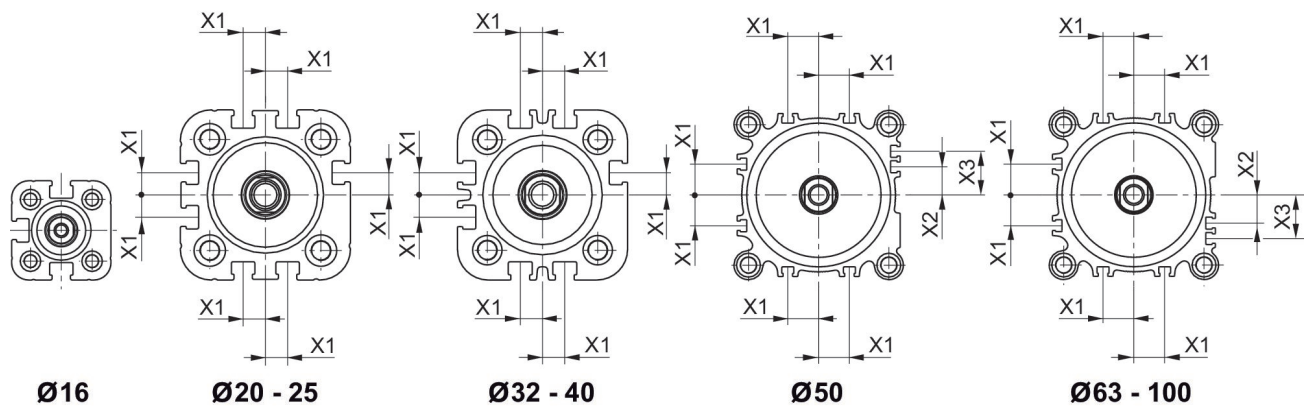

T = View for sensor groove

Compact cylinder, Series KPZ

0822492303

Series KPZ

2025-07-17

Piston Ø	A	BG min.	DA H11	DT H13	E	EE	KK	KV	KW	LA
16	20	14.5	10	6	29.5	M5	M8x1,25	13	4	2.5
20	22	15.5	12	7.5	36	M5	M10x1,25	16	5	2.5
25	22	15.5	12	8	40	M5	M10x1,25	16	5	2.5
32	22	18	14	8.6	50	G 1/8	M10x1,25	16	5	2.5
40	22	18	14	9	58	G 1/8	M10x1,25	16	5	2.5
50	24	24	18	11	68	G 1/8	M12x1,25	18	6	2.5
63	24	24	18	11	80	G 1/8	M12x1,25	18	6	2.5
80	32	28	23	14	99	G 1/8	M16x1,5	24	8	3
100	40	27.5	28	15	120	G 1/8	M20x1,5	30	10	3

Piston Ø	LB	LJ	LW	MM f8	PL	RT	SW	TG	WH	X1
16	3.5	2.5	2.8	8	7.5	M4	7	18 ±0.4	4.5	–
20	4.5	4.5	3.7	10	7.5	M5	8	22 ±0.4	5	4.2
25	4.4	5	3.7	10	7.5	M5	8	26 ±0.4	5.5	4.5
32	5.5	5.1	5*	12	8.5	M6	10*	32 ±0.5	7	6.5
40	5.5	9.6	5*	12	8.5	M6	10*	42 ±0.5	7	11
50	2	8.5	4,8*	16	8.5	M8	13*	50 ±0.6	7.5	13
63	2	17.8	4,8*	16	8.5	M8	13*	62 ±0.7	8	18
80	1	22.9	6,4*	20	8.3	M10	16*	82 ±0.7	9.5	18
100	3.5	26.5	6,4*	25	9.7	M10	21*	103 ±0.7	10.5	20

Piston Ø	X2	X4	ZA +S	ZB +S
16	–	–	38	42,5 0/+1,4
20	–	–	38	43 0/+1,4
25	–	–	39	44,5 0/+1,4
32	–	–	44	51 0/+1,6
40	–	–	45	52 0/+1,6
50	4	13	45.5	53 0/+1,6
63	12	21	49	57 0/+2
80	16.5	25.5	54.5	64 0/+2
100	20	20	66.5	77 0/+2