

Series TU1 Polyurethane




Technical data

Industry	Industrial
Note	suitable for dynamic laying
External Ø	6 mm
Wall thickness	1.05 mm
Bending radius min. at 20 °C	18 mm
Color	Red
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Delivery unit length	100 m
Weight per meter	0.02 kg
Material	Polyester polyurethane
Part No.	1820712027

Technical information

External calibrated
Suitable for dynamic laying
Halogen-free

Pressure-Temperature-Diagram

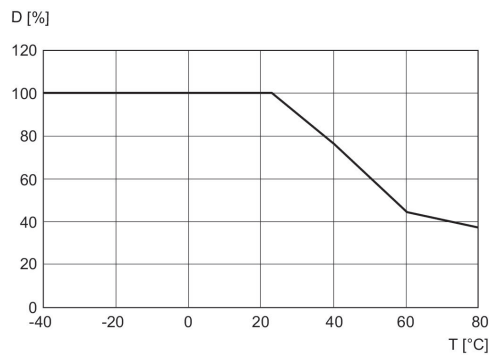

D = pressure resistance T = temperature