

## AVENTICS Series TU1 Compressed air tubings

AVENTICS Series TU1 offers a broad range of plastic materials and colours to fit with your tubing application and easily identify your pneumatic circuit. TU1 Tubing are suitable for dynamic laying and offers a wide range of working environments including versions for the food industry.




## Technical data

|                                   |                             |
|-----------------------------------|-----------------------------|
| Industry                          | Industrial                  |
| Note                              | suitable for dynamic laying |
| External Ø                        | 6 mm                        |
| Wall thickness                    | 1.05 mm                     |
| Bending radius min. at 20 °C      | 18 mm                       |
| Color                             | Blue                        |
| Min. ambient temperature          | -30 °C                      |
| Max. ambient temperature          | 80 °C                       |
| Max. working pressure at [[20]°C] | 10 bar                      |
| Delivery unit length              | 100 m                       |
| Weight per meter                  | 0.02 kg                     |
| Material                          | Polyester polyurethane      |
| Part No.                          | 1820712037                  |

## Technical information

External calibrated  
Suitable for dynamic laying  
Halogen-free

## Pressure-Temperature-Diagram

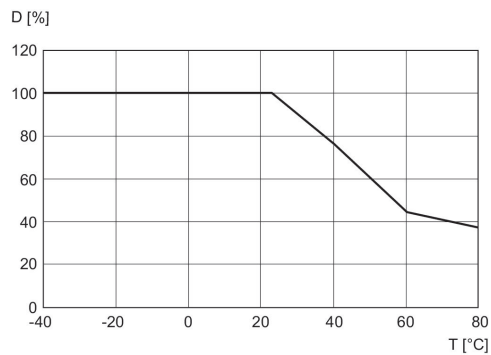

D = pressure resistance T = temperature