


AVENTICS Series TU2 Compressed air tubings

AVENTICS Series TU2 Duo plastic tubing in PUR are suitable for dynamic laying and can be partially or continuously bonded.

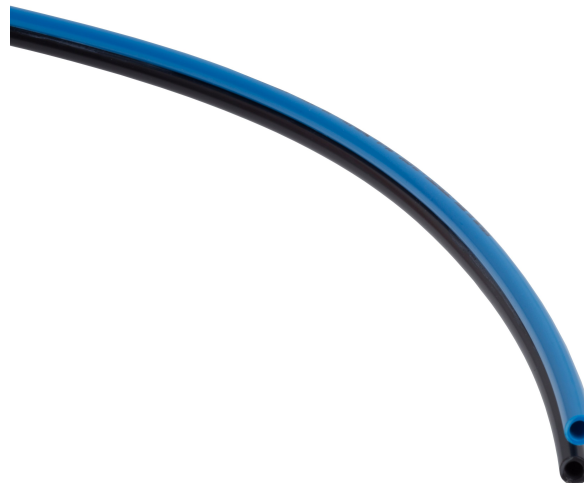

Technical data

Industry

Industrial

Note

suitable for dynamic laying
Continuously bonded

External Ø

10 mm

Wall thickness

1.25 mm

Bending radius min. at 20 °C

45 mm

Color

Blue-black

Min. ambient temperature

-30 °C

Max. ambient temperature

80 °C

Max. working pressure at [[20]°C]

10 bar

Delivery unit length

25 m

Weight per meter

0.084 kg

Material

Polyester polyurethane

Part No.

1820712074

Technical information

Halogen-free

Suitable for dynamic laying