



Technical data

Industry	Industrial
Type	Blanking plate
Type	Blanking plate
Frame size	ISO 3
Standards	ISO 5599-1
Min. working pressure	-0.9 bar
Max. working pressure	16 bar
Min. ambient temperature	0 °C
Max. ambient temperature	80 °C
Min. medium temperature	0 °C
Max. medium temperature	80 °C
Medium	Compressed air
Mounting screw	with hexagon socket
Weight	0.421 kg

Material

Material base plate	Die-cast aluminum
Seal material	Acrylonitrile butadiene rubber
Part No.	1825503174


Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

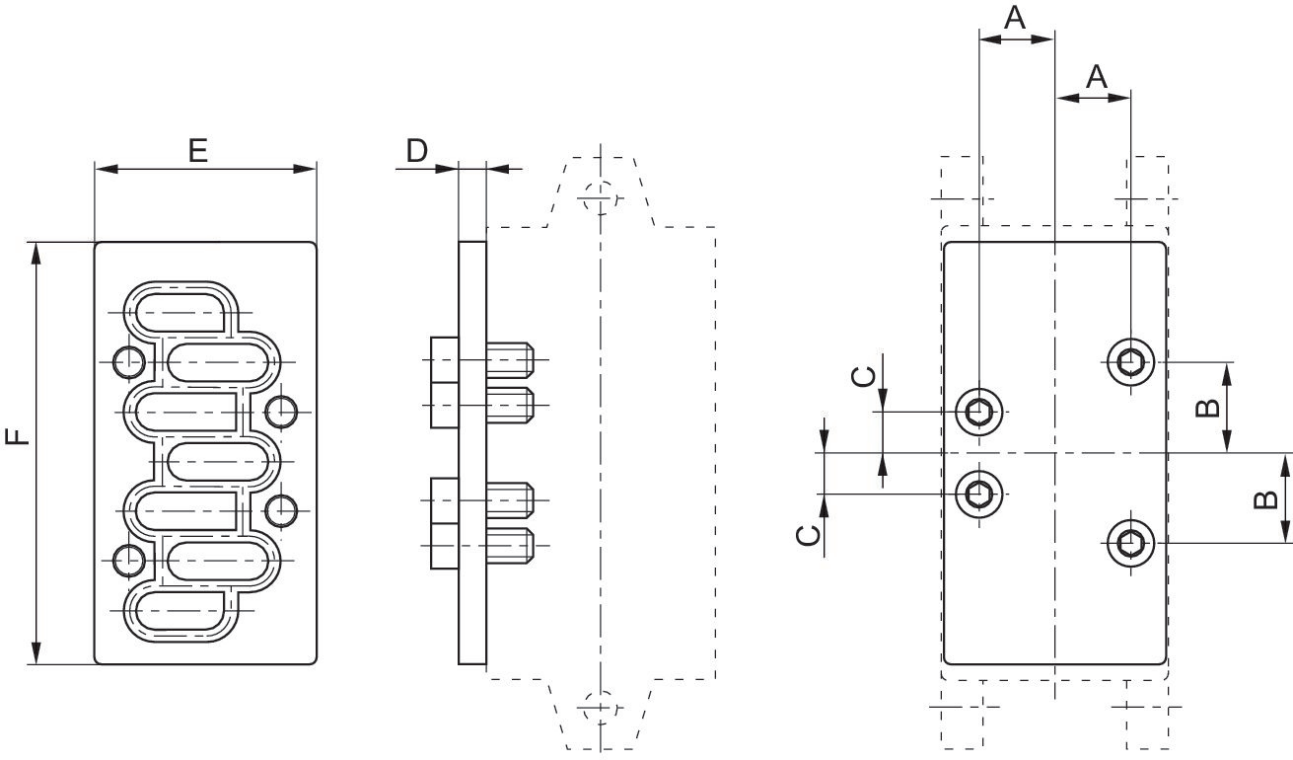

Part No.	Frame size	A	B	C	D	E	F
1825503282	ISO 1	14	18	9	7	42	80
1825503176	ISO 2	19	24	12	15	54	100