

# Manifold block, Series DO30

1825503237

ISO 15407-1, Base and end plates



## Technical data

Industry  
Industrial

Type  
Manifold strip

Direction of pneumatic port (1)  
On the side

Compressed air connection input  
G 1/8

Working pressure min.  
0 bar

Working pressure max  
10 bar

Min. ambient temperature  
-15 °C

Max. ambient temperature  
80 °C

Medium  
Compressed air

Max. number of valve positions  
2

Weight  
0.09 kg

## Material

Material base plate  
Aluminum

Seal material  
Acrylonitrile butadiene rubber

Part No.  
1825503237

## Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

## Dimensions

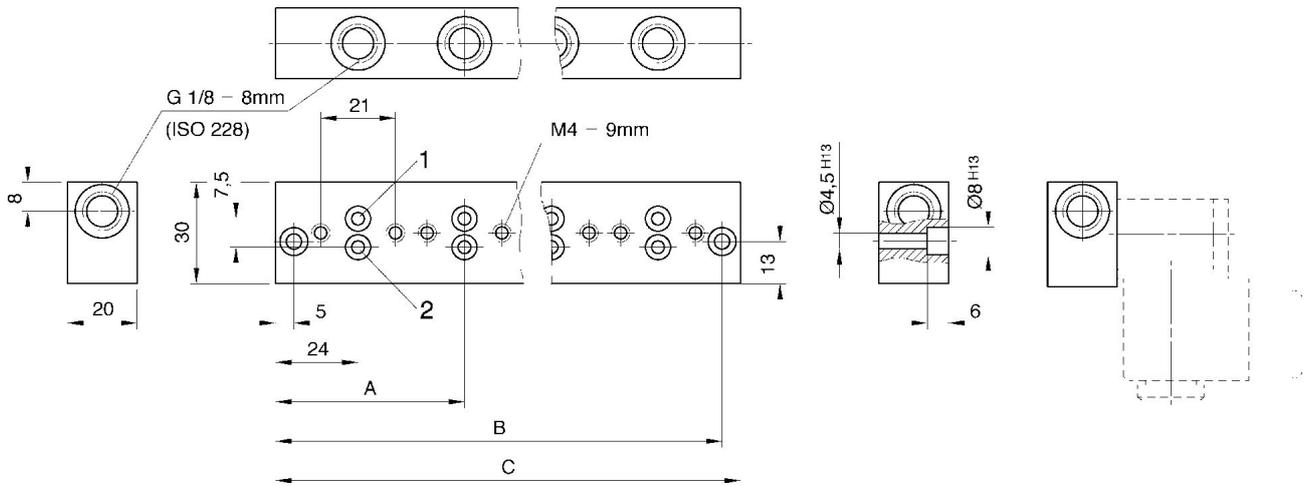

Part No.	A	B	C	Weight
1825503236	-	43	48	0.09 kg
1825503237	55	74	79	0.09 kg
1825503238	86	105	110	0.09 kg
1825503239	117	136	141	0.09 kg
1825503240	148	167	172	0.09 kg