

Manifold block, Series DO30

1825503240

ISO 15407-1, Base and end plates



Technical data

Industry

Industrial

Type

Manifold strip

Direction of pneumatic port (1)

On the side

Compressed air connection input

G 1/8

Working pressure min.

0 bar

Working pressure max

10 bar

Min. ambient temperature

-15 °C

Max. ambient temperature

80 °C

Medium

Compressed air

Max. number of valve positions

5

Weight

0.225 kg

Material

Material base plate

Aluminum

Seal material

Acrylonitrile butadiene rubber

Part No.

1825503240

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

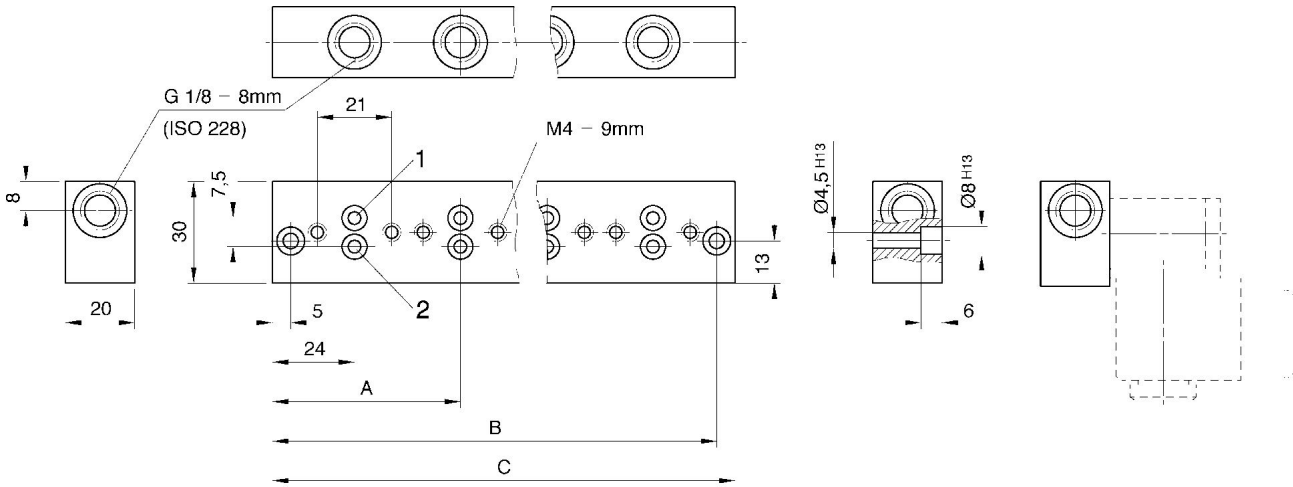

Part No.	A	B	C	Weight
1825503236	—	43	48	0.225 kg
1825503237	55	74	79	0.225 kg
1825503238	86	105	110	0.225 kg
1825503239	117	136	141	0.225 kg
1825503240	148	167	172	0.225 kg