

Manifold block, Series DO22

1825503320

ISO 15407-1, Base and end plates



Technical data

Industry
Industrial

Type
Manifold strip

Compressed air connection input
G 1/8

Type
Single plug-in wiring
Working pressure min.
0 bar

Max. number of valve positions
3

Grid dimension
23 mm

Material

Material base plate
Aluminum

Direction of pneumatic port (2,4)
On the side

Compressed air connection output
M5

Exhaust (3,5)
uncollected exhaust

Working pressure max
10 bar

Medium
Compressed air

Mounting screw
M3

Weight
0.1 kg

Surface housing
anodized

Part No.
1825503320

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions

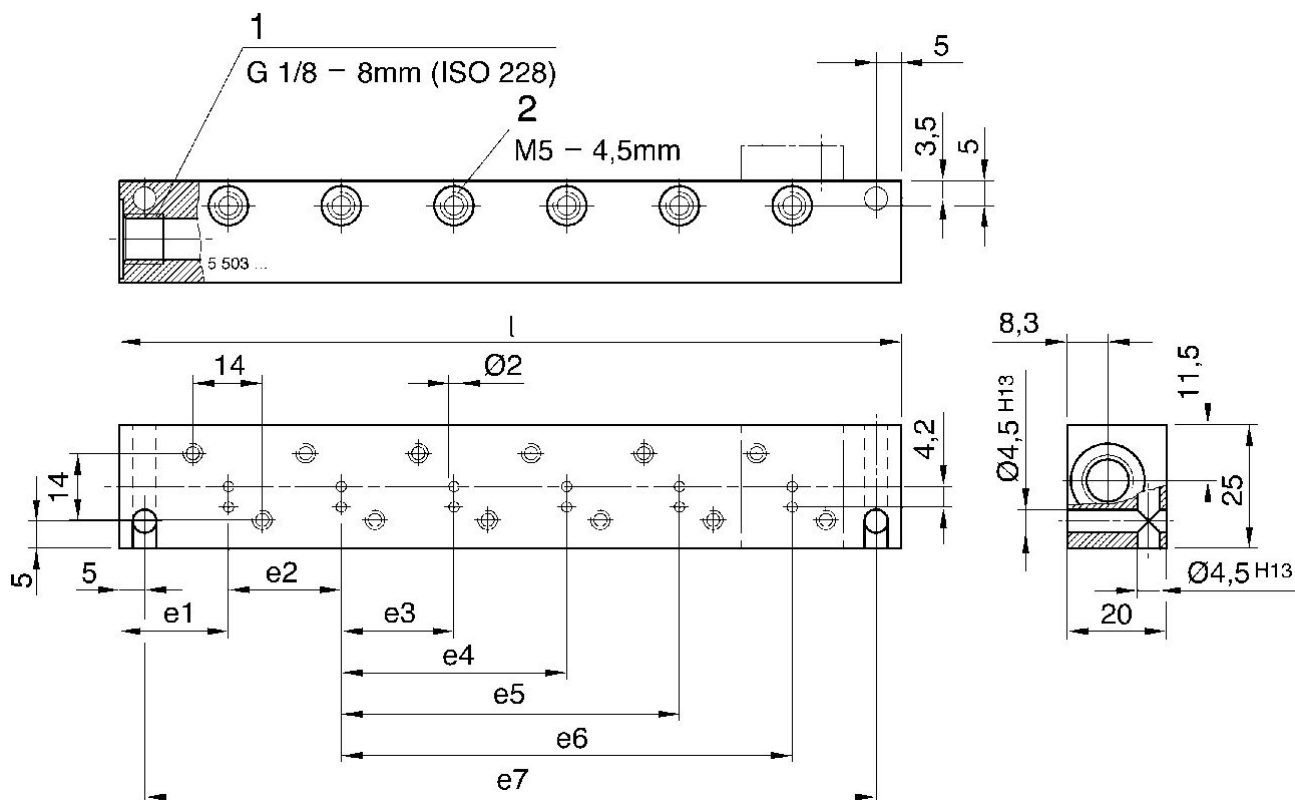

Part No.	e1	e2	e3	e4	e5	e6	e7	L	Weight
1825503318	22	—	—	—	—	—	34	44	0.1 kg
1825503319	22	23	—	—	—	—	57	67	0.1 kg
1825503320	22	23	46	—	—	—	80	90	0.1 kg
1825503321	22	23	46	69	—	—	103	113	0.1 kg
1825503322	22	23	46	69	92	—	126	136	0.1 kg