


Transition plate, 26 mm / 18 mm

1825504036

ISO 15407-1, Base and end plates

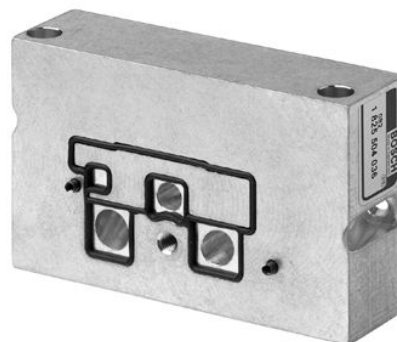

Technical data

Industry

Industrial

Type

Transition plate

Direction of pneumatic port (1)

On the side

Compressed air connection input

G 1/4

Direction of pneumatic port (2,4)

On the side

Direction of pneumatic port (3,5)

On the side

Frame size

18 mm

26 mm

Standards

ISO 15407-1

Working pressure min.

-0.95 bar

Working pressure max

16 bar

Exhaust type

Ports separated

Exhaust (3,5)

uncollected exhaust

Direction of pneumatic port (12)

On the side

Compressed air connection 12

M5

Compressed air connection 14

M5

Min. ambient temperature

-15 °C

Max. ambient temperature

70 °C

Min. medium temperature

-15 °C

Max. medium temperature

70 °C

Medium

Compressed air

Mounting screw

with hexagon socket

Weight

0.311 kg

Material

Material base plate

Aluminum

Part No.

1825504036

Seal material

Acrylonitrile butadiene rubber

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

