


Blanking plate

1825A00087

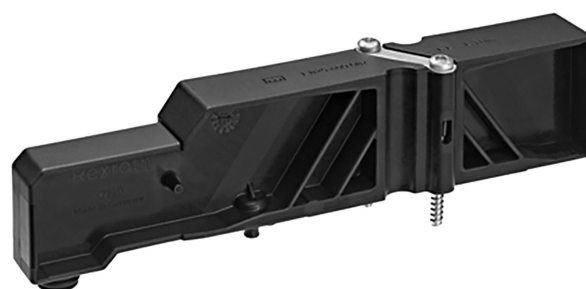

Technical data

Industry
Industrial

Type
Blanking plate

Delivery unit
1 piece

Working pressure min.
-0.9 bar

Working pressure max
10 bar

Mounting screw
cross recessed DIN EN ISO 4757-Z2

Tightening torque for mounting screws
1.1 Nm

For series
HF02-LG

Type
Blanking plate, incl. sealing kit, 1x mounting screws

Min. ambient temperature
-5 °C

Max. ambient temperature
50 °C

Medium
Compressed air

Weight
0.093 kg

Material

Material base plate
Polyamide

Seal material
Nitrile rubber

Part No.
1825A00087

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

