

Series BCR


1971372000

AVENTICS
Series BCR
Bellow
actuators

2024-03-15

AVENTICS Series BCR Bellow actuators

The AVENTICS Series BCR bellow cylinders are designed for applications that require very high forces with a mounting ring (no covers) and bellows made of natural rubber elastomer for direct mounting to suitable connection surfaces in the system. Therefore, the connection geometry is freely configurable.



Technical data

Industry	Industrial
Bellows	triple
Type	Bellow actuator with mounting ring
Functional principle	Single-acting, retracted without pressure
Cover diameter	638 mm
Max. permissible angle of tilt	30 °
Max. effective stroke	354 mm
Min. radial installation space	775 mm
Min. installation height	126 mm
Max. installation height	480 mm
Min. force	124000 N
Max. force	219000 N
Min. working pressure	0 bar
Max. working pressure	8 bar
Min. ambient temperature	-40 °C
Max. ambient temperature	70 °C
Medium	Compressed air
Pressure for determining forces	6 bar
Weight	17 kg

Series BCR

1971372000

AVENTICS
Series BCR
Bellow
actuators

2024-03-15

Material

Material bellow	caoutchouc/butadiene caoutchouc
Material mounting ring	Aluminum
Material clamping ring	Aluminum
Part No.	1971372000

Technical information

Compliance with the minimum height H min. as well as the maximum height H max. must be ensured with end stops.

Use at operating height $\geq H_{max}$: only permitted upon approval by AVENTICS

Further information on vibration isolation can be found in the "Technical information" document (available in the MediaCentre).

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).


Series BCR

1971372000

AVENTICS
Series BCR
Bellow
actuators

2024-03-15

Dimensions

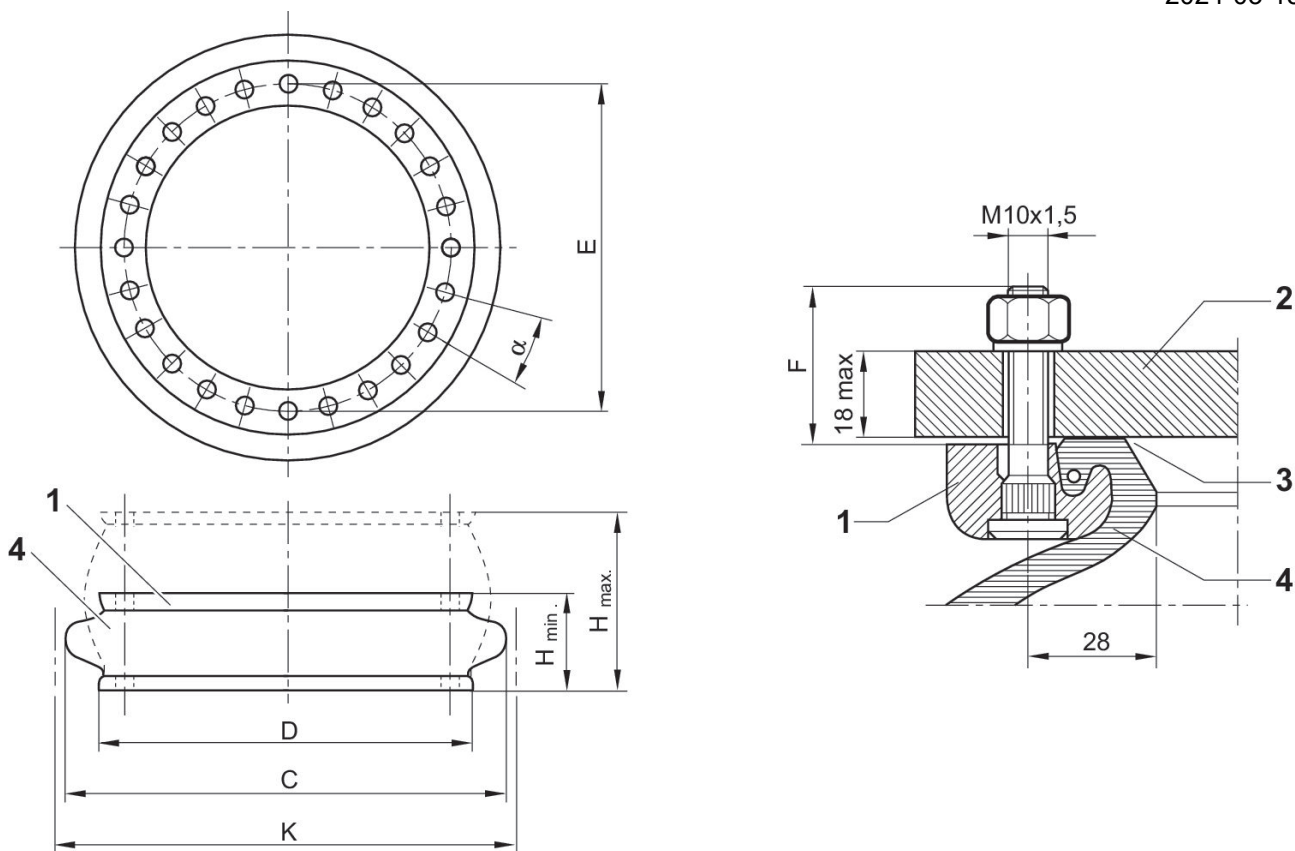

section of mounted bead ring with staybolt 1. mounting ring 2. machine part 3. sealing surface *) 4. bellow * recommendation for surface finish: if the surface is turned or cylindrically ground: Ra 6 if the surface is milled or surface ground: Ra 0,8 suitable tightening torque M8: 25 Nm, M10: 40 Nm, M16: 70 Nm air connection in the mounting part

Part No.	H min.	H max.	C	D	E ±2	F	α°	K	Min. re- turn force
1946272000	114	404	462	384	350	31,8	20	510	600
1951282000	114	400	521	451	419	31,8	15	570	420
2999698310	114	419	600	517	482	31,8	15	650	400
1971372000	126	480	725	638	596	31,8	11,25	775	800
2999697110	140	490	950	890	830	26,8	9	1000	7500

Series BCR

1971372000

AVENTICS

Series BCR

Bellow

actuators


Force-displacement diagram

2999697110


Force-displacement diagram

1971372000

2024-03-15

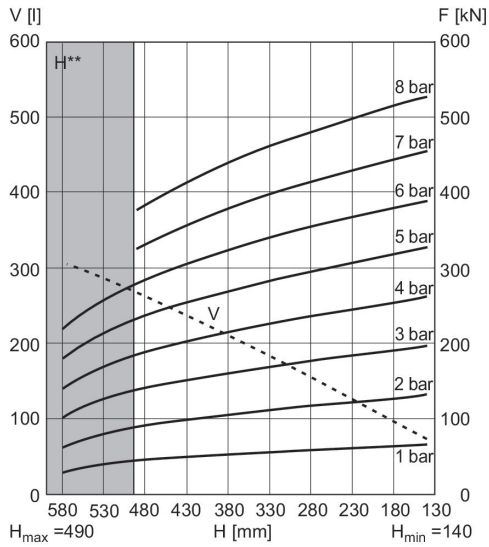

V = volume H = height H* = recommended operating height for vibration isolation H** = use permitted only upon approval by AVENTICS
1 kN = 1000 N

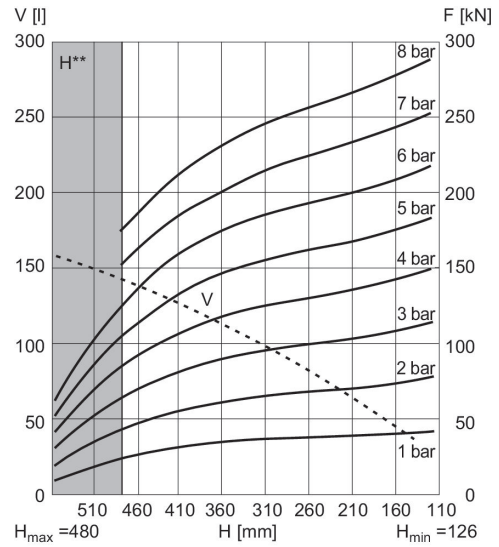


V = volume H = height H* = recommended operating height for vibration isolation H** = use permitted only upon approval by AVENTICS
1 kN = 1000 N

Force-displacement diagram


2999698310

Force-displacement diagram

1951282000

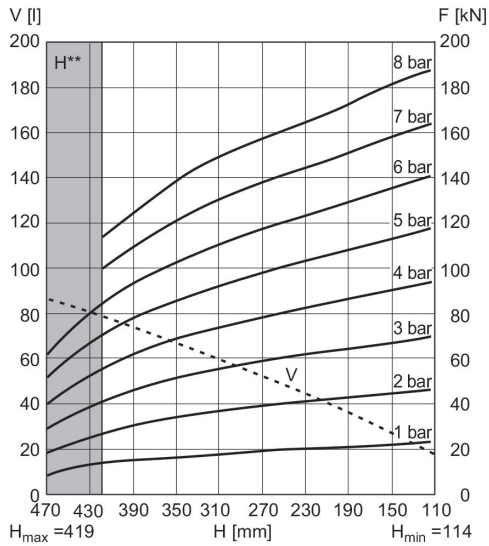

V = volume H = height H* = recommended operating height for vibration isolation H** = use permitted only upon approval by AVENTICS
1 kN = 1000 N

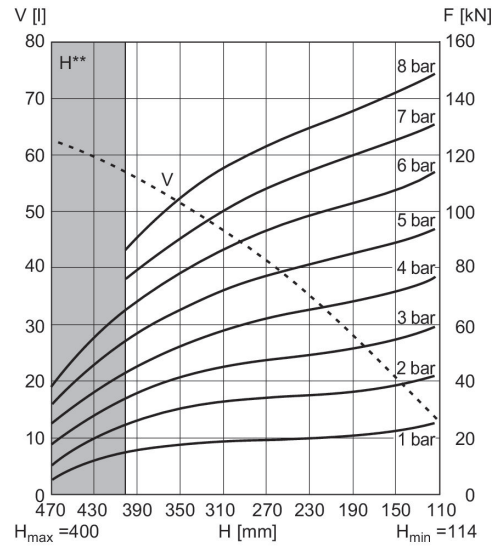

V = volume H = height H* = recommended operating height for vibration isolation H** = use permitted only upon approval by AVENTICS
1 kN = 1000 N

Series BCR


1971372000

AVENTICS
Series BCR
Bellow
actuators

Force-displacement diagram

1946272000

2024-03-15

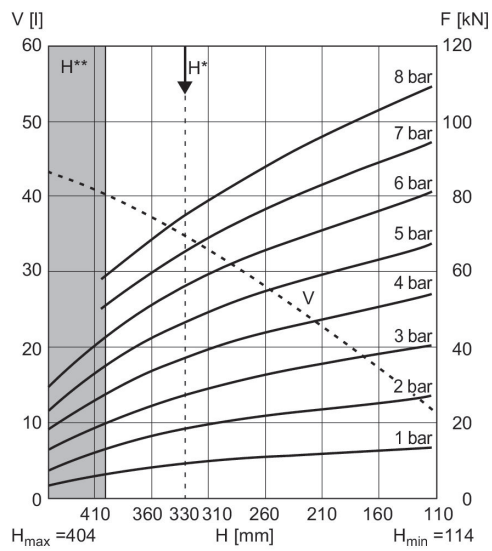

V = volume H = height H* = recommended operating height for vibration isolation H** = use permitted only upon approval by AVENTICS
1 kN = 1000 N