# QR1-S-RBS standard series

## 2123204000

General series information **AVENTICS Series QR1 Fittings** 

■ AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive Oring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



#### Technical data

Industrial Industry Fitting type Blanking plug Compressed air connection type pin bushing

Port G Ø 4

Note Due to product optimisation, the delivered article

may currently deviate from the dimensions shown.

Type QR1-S-RBS -0.95 bar Working pressure min. 10 bar Working pressure max

0°C Min. ambient temperature 60 °C Max. ambient temperature

Delivery unit 20 piece Weight 0.0006 kg

#### Material

Surface nickel-plated

Housing material Polybutyleneterephthalate


Part No. 2123204000



### **Technical information**

The series QR1 (plastic) and QR2 (metal) can not be combined

## **Dimensions**

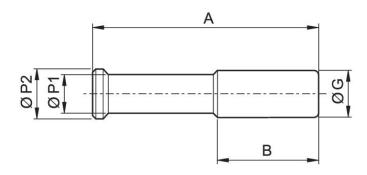

Part No.	Port G	А	В	Ø P1	Ø P2
2123204000	Ø 4	28	16	3	4
2123206000	Ø 4	32	17	4	6
2123208000	Ø 4	39	21,5	5	9
2123210000	Ø 4	42	21	8	10
2123212000	Ø 4	44	30	8	12
2123214000	Ø 4	45	24.6	8	14

