


QR1-S-RBS standard series

2123206000

General series information
AVENTICS Series QR1 Fittings

- AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.

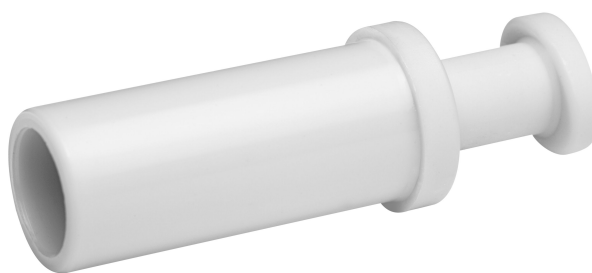

Technical data

Industry

Fitting type

Compressed air connection type

Port G

Note

Type

Working pressure min.

Working pressure max

Min. ambient temperature

Max. ambient temperature

Delivery unit

Weight

Industrial

Blanking plug

pin bushing

Ø 6

Due to product optimisation, the delivered article may currently deviate from the dimensions shown.

QR1-S-RBS

-0.95 bar

10 bar

0 °C

60 °C

20 piece

0.0007 kg

Material

Surface

Housing material

Part No.

nickel-plated


Polybutyleneterephthalate

2123206000

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

Dimensions

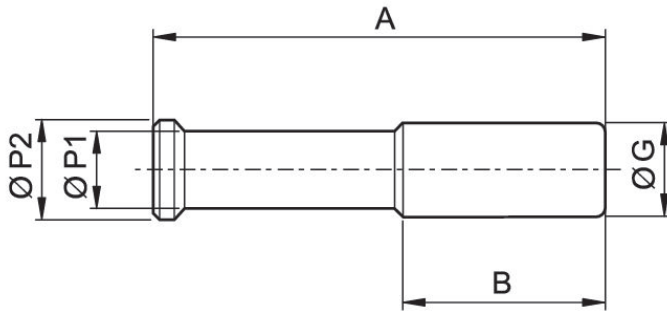

Part No.	Port G	A	B	Ø P1	Ø P2
2123204000	Ø 6	28	16	3	4
2123206000	Ø 6	32	17	4	6
2123208000	Ø 6	39	21,5	5	9
2123210000	Ø 6	42	21	8	10
2123212000	Ø 6	44	30	8	12
2123214000	Ø 6	45	24.6	8	14