

# QR1-S-RBS standard series

2123214000

General series information  
AVENTICS Series QR1 Fittings

- AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



## Technical data

Industry	Industrial
Fitting type	Blanking plug
Compressed air connection type	pin bushing
Port G	Ø 14
Note	Due to product optimisation, the delivered article may currently deviate from the dimensions shown.
Type	QR1-S-RBS
Working pressure min.	-0.95 bar
Working pressure max	10 bar
Min. ambient temperature	0 °C
Max. ambient temperature	60 °C
Delivery unit	10 piece
Weight	0.005 kg


## Material

Surface	nickel-plated
Housing material	Polybutyleneterephthalate
Part No.	2123214000

## Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

## Dimensions

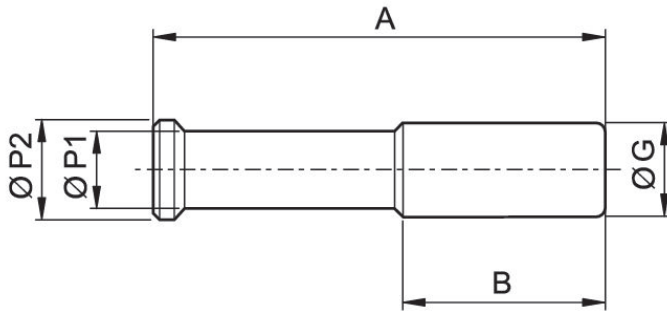

Part No.	Port G	A	B	Ø P1	Ø P2
2123204000	Ø 14	28	16	3	4
2123206000	Ø 14	32	17	4	6
2123208000	Ø 14	39	21,5	5	9
2123210000	Ø 14	42	21	8	10
2123212000	Ø 14	44	30	8	12
2123214000	Ø 14	45	24.6	8	14