

Base plate

2631401000

2024-12-12



Technical data

Industry
Type
Type
Compressed air connection output
Port exhaust

Medium

Protection class
Weight

Material

Material base plate
Seal material
Part No.

Industrial
Base plate
4 ports
G 1/4
G 1/4

Compressed air

IP69K
0.161 kg

Polyamide fiber-glass reinforced
Hydrogenated acrylonitrile butadiene rubber
2631401000

Base plate

2631401000

2024-12-12

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

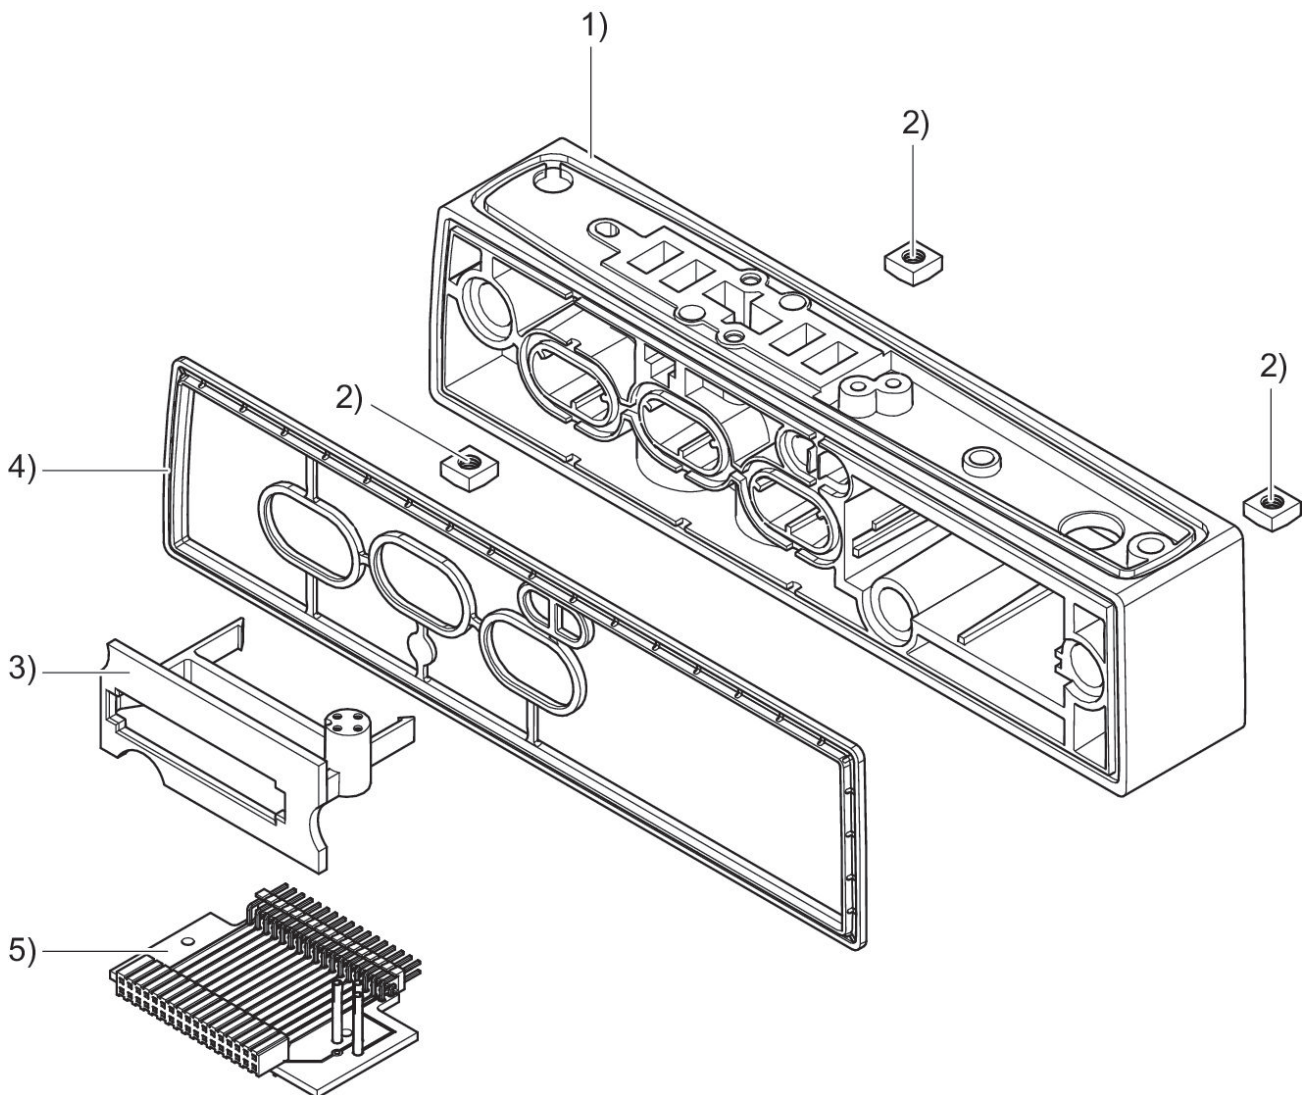


1) Subbase 2) plug 3) circuit board holder 4) seal 5) circuit board

Base plate

2631401000

2024-12-12

Fig. 2
CL03, HF02-LG

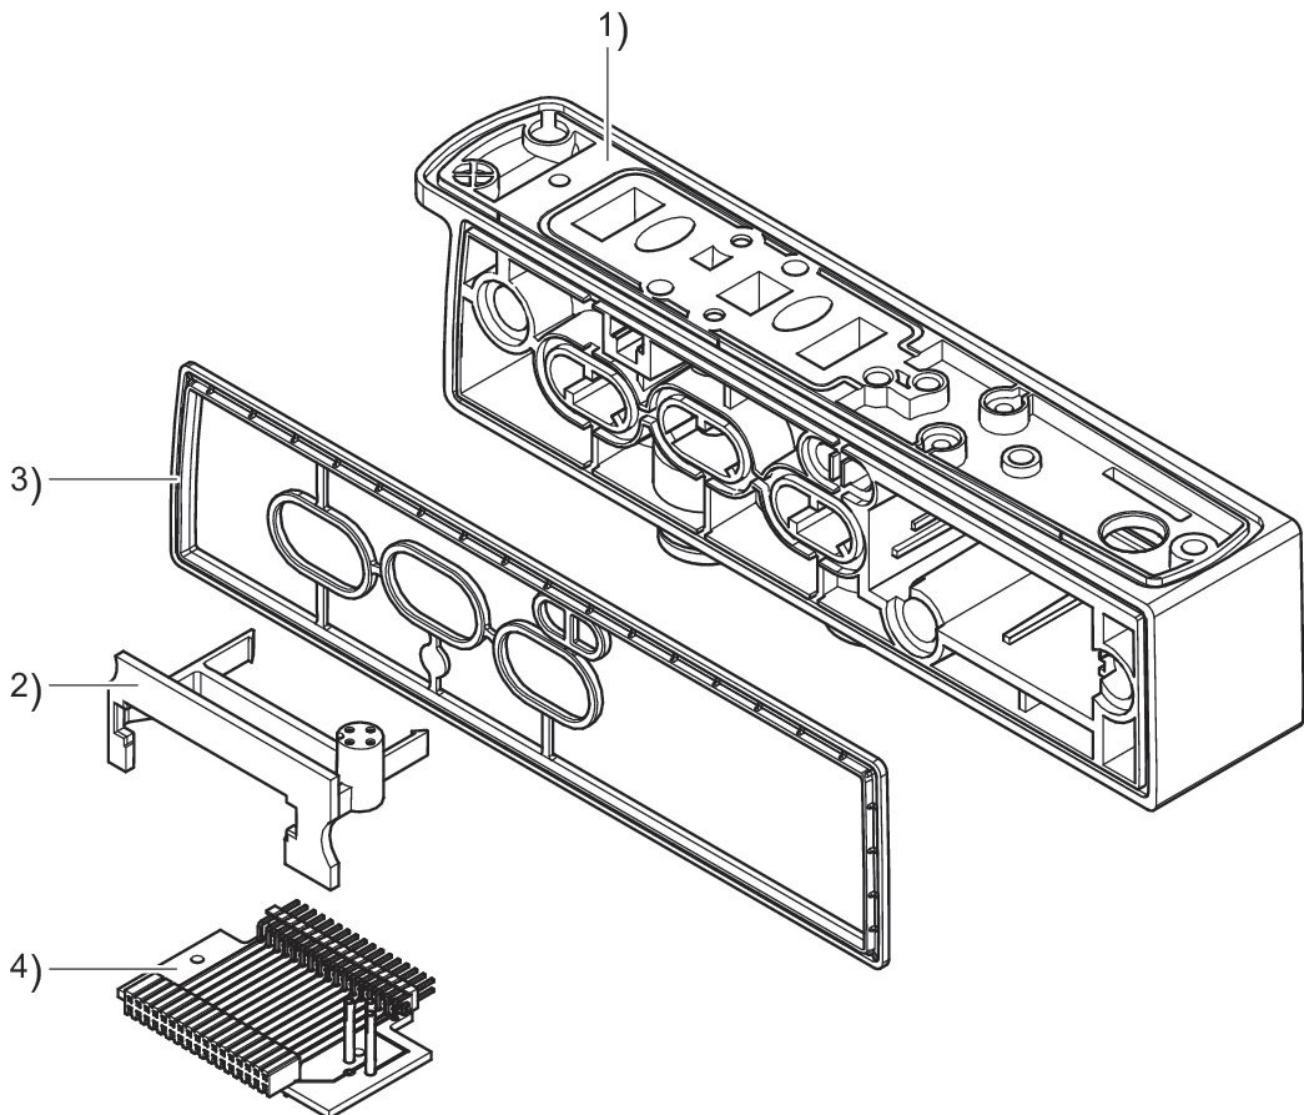

1) Subbase 2) Circuit board holder 3) Seal 4) Circuit board