


**Séries 563 018, 563 131**

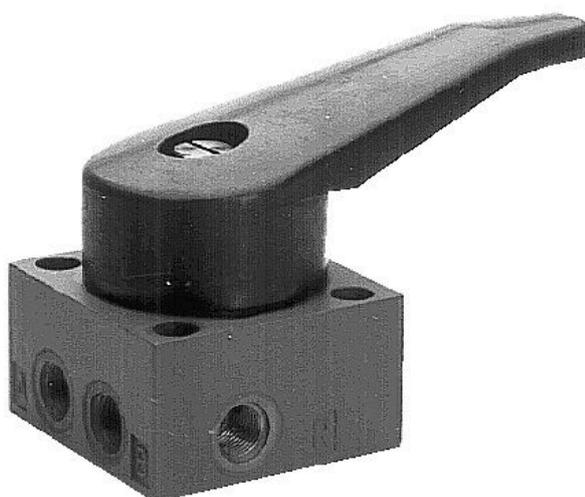

**AVENTICS™**


**Vannes directionnelles  
AVENTICS série 563/018/131**

  
**EMERSON™**

## **Séries 563 018, 563 131**


Les séries 563 018/131 d'AVENTICS sont des distributeurs à clapet à commande manuelle à débit de 300 l/min (série 563 018) et 1 100 l/min (série 563 131). Grâce à leur conception simple et robuste, elles sont toujours prêtes à l'emploi et faciles à utiliser, même si vous portez des gants de travail.

- Robustes et légères
- Extrêmement fiables
- Adaptées aux températures extrêmes

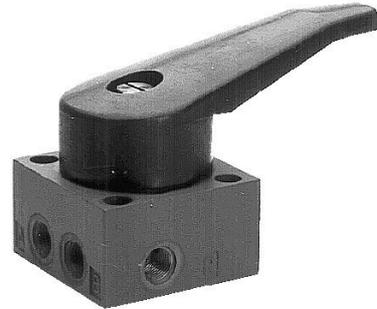


### Distributeur 4/2, Série 563 018

300 l/min  
Monostable  
Taraudage  
mécanique  
Levier, à crantage



Entrée raccord d'air comprimé	Sortie raccord d'air comprimé	Raccord d'air comprimé échappement	Référence
G 1/8	G 1/8	G 1/8	5630180100


#### Dimensions

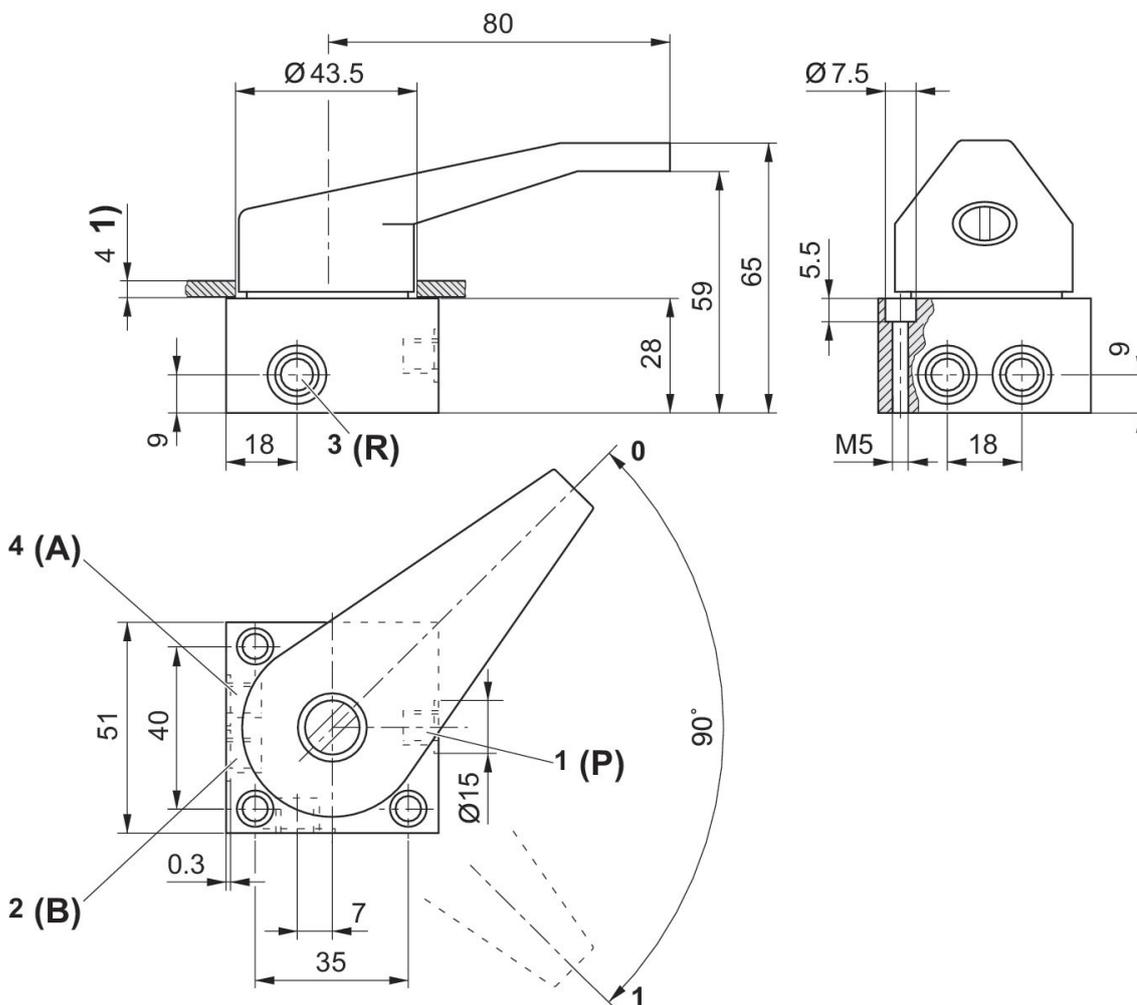

1) Max.  
Pos. 0 : raccord 1 # raccord 4 , raccord 2 # raccord 3 Pos. 1 : raccord 1 # raccord 2 , raccord 4 # raccord 3


## Distributeur 4/3, Série 563 018

300 l/min  
Monostable  
Taraudage  
mécanique  
Levier, à crantage

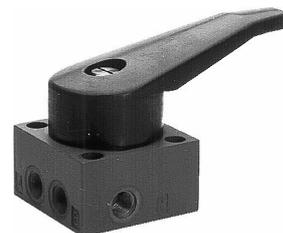

Version	Entrée raccord d'air comprimé	Sortie raccord d'air comprimé	Raccord d'air comprimé échappement	Référence
Centre ouvert	G 1/8	G 1/8	G 1/8	5630181100
Centre fermé	G 1/8	G 1/8	G 1/8	5630182100

Dimensions

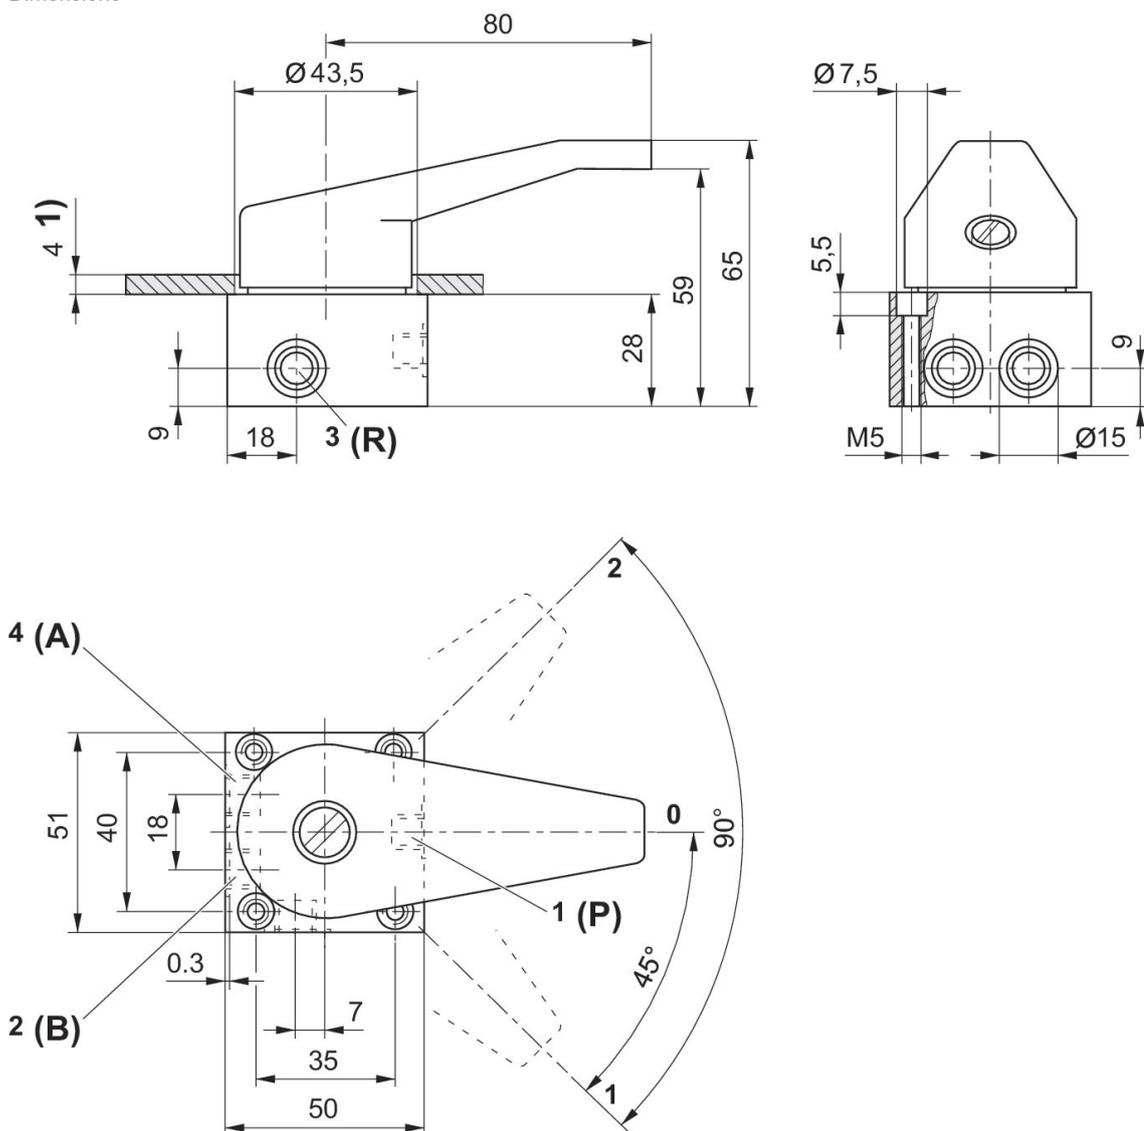

1) Max.  
Pos. 0 (5630181100) : orifice 2 , 4 # 3 Pos. 0 (5630182100) : centre fermé Pos. I : orifice 1 # orifice 2 , orifice 4 # orifice 3 Pos. II : orifice 1 # orifice 4 , orifice 2 # orifice 3




### Distributeur 5/3, Série 563 131

1100 l/min  
Monostable  
Taraudage  
mécanique  
Levier, à crantage



Version	Entrée raccord d'air comprimé	Sortie raccord d'air comprimé	Raccord d'air comprimé échappement	Référence
Centre ouvert	G 1/4	G 1/4	G 1/4	5631311100
Centre fermé	G 1/4	G 1/4	G 1/4	5631312100

#### Dimensions

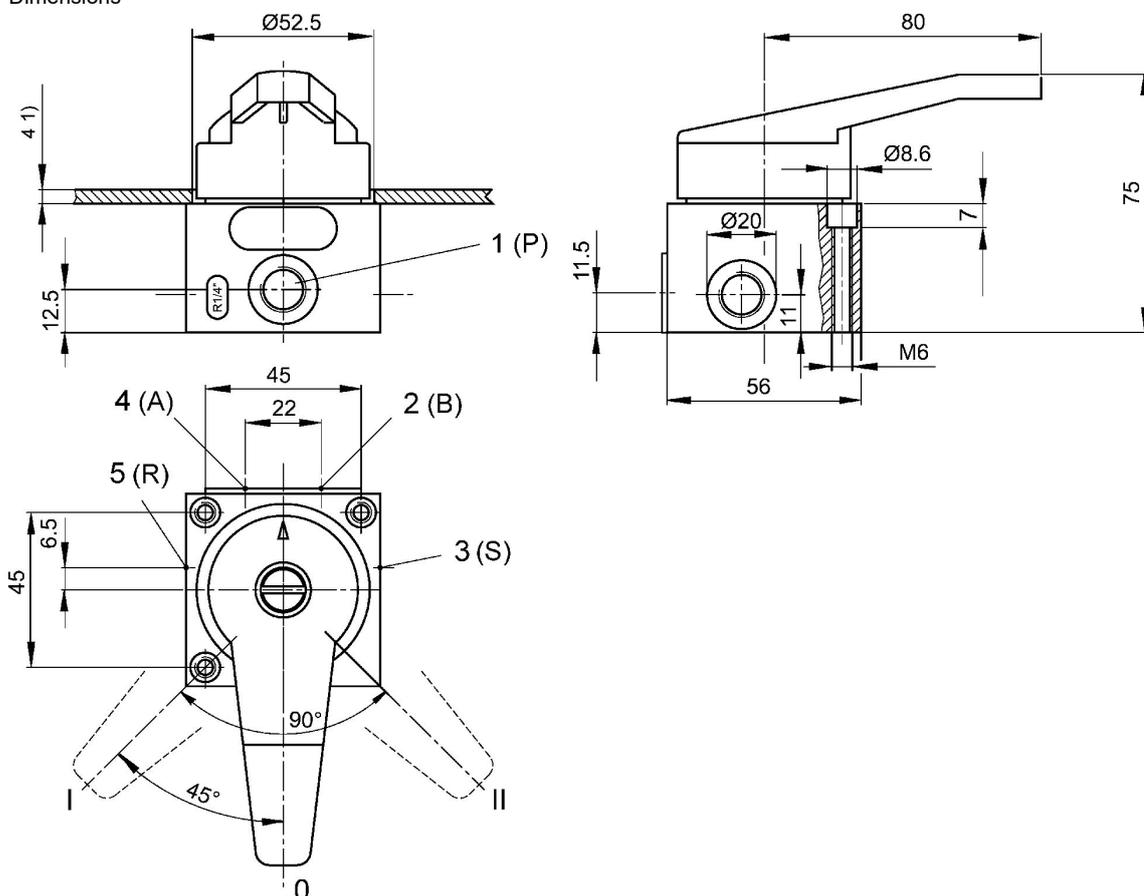

1) Max.  
Pos. 0 (5631311100) : orifice 2 # orifice 3 , orifice 4 # orifice 5 Pos. 0 (5631312100) : centre fermé Pos. I : orifice 1 # orifice 4 , orifice 2 # orifice 3 Pos. II : orifice 4 # orifice 5 , orifice 1 # orifice 2

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



**CONSIDER IT SOLVED™**