


Series PM1

The AVENTICS Series PM1 is a compact pressure switch for measuring compressed air and hydraulic oil. The Series PM1 allows users to select between different pressure ranges from -0.9 to 16 bar.

- Robust housing
- Available with the pressure ranges -0.9 to 0 bar, -0.9 to 1 bar, -0.9 to 3 bar or 0.2 to 16 bar
- Various process connections
- ATEX version available

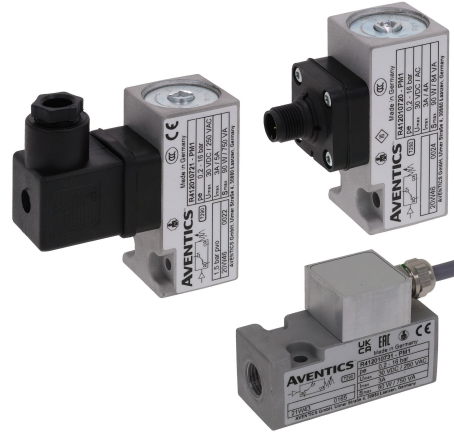



Pressure Switches, Series PM1

Plug
EN 175301-803, form A
Internal thread



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
G 1/4	-0.9	0	80 bar	max. switching pressure difference	Any	R412010711
G 1/4	0.2	16	80 bar	max. switching pressure difference	Any	R412010713
G 1/4	-0.9	3	80 bar	max. switching pressure difference	Any	R412022752


Dimensions in mm

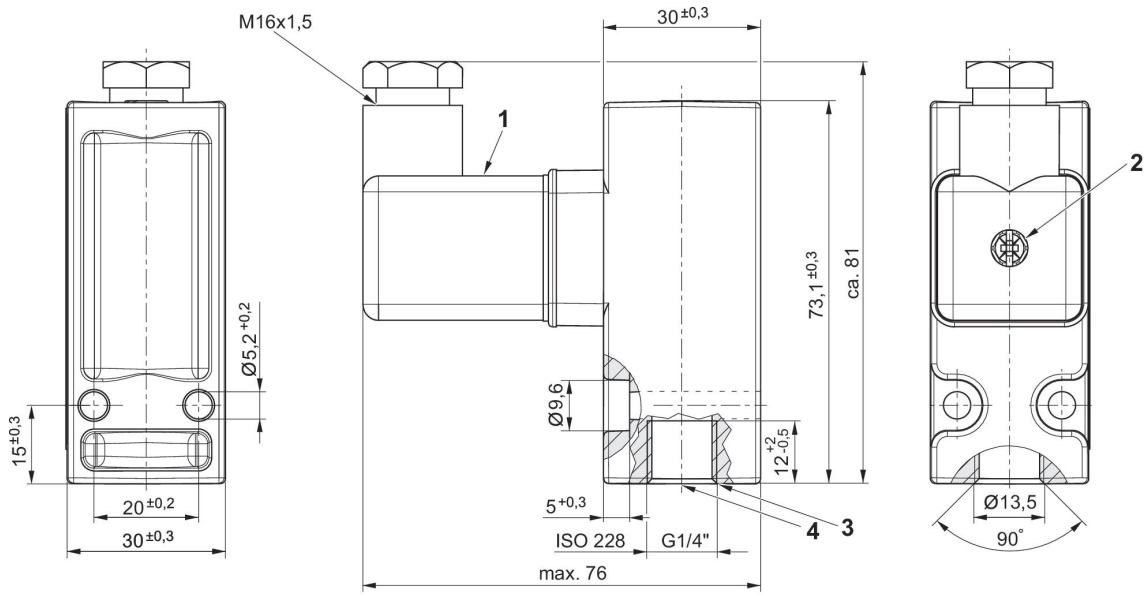

- 1) Valve plug connector
- 2) Mounting screw
- 3) sealing surface
- 4) Tightening torque MA = 12 + 1 Nm
- 5) Adjustment screw, self-holding



R412010711, R412010713, R412022752

PIN assignment for valve plug connectors





Pressure Switches, Series PM1

Plug
EN 175301-803, form A
Internal thread



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
G 1/4	0.2	16	80 bar	max. switching pressure difference	Any	R412010712


Dimensions in mm

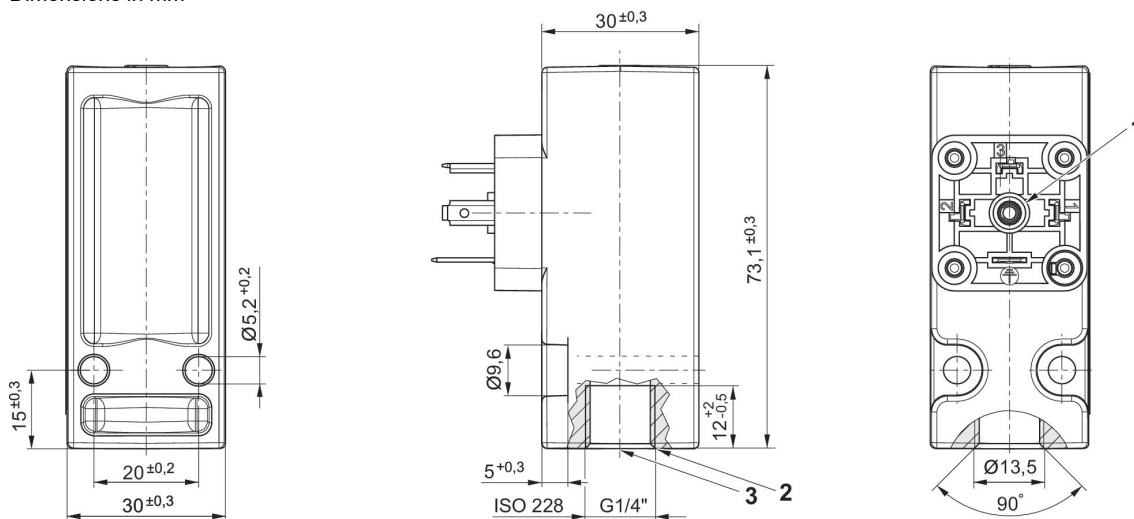

- 1) Mounting screw
- 2) sealing surface
- 3) Tightening torque MA = 12 + 1 Nm
- 4) adjustment screw



R412010712

PIN assignment for valve plug connectors




Pressure Switches, Series PM1

Plug
M12x1
Internal thread



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
G 1/4	0.2	16	80 bar	max. switching pressure difference	Any	R412010717


Dimensions in mm

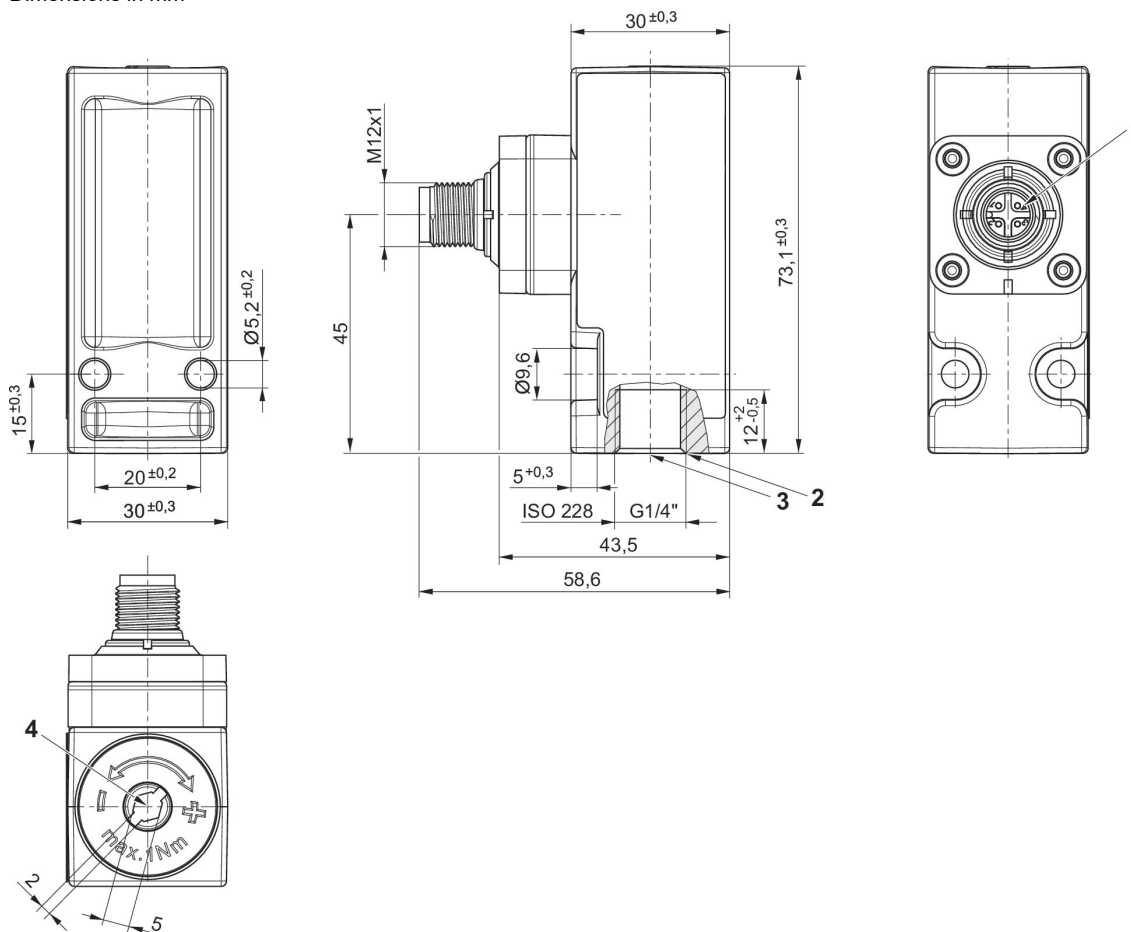

- 1) M12 connection rotatable by 90° and 30° with detent
- 2) sealing surface
- 3) Tightening torque MA = 12 + 1 Nm
- 4) adjustment screw


R412010717

Pin assignments




Pressure Switches, Series PM1

Plug
M12x1
Internal thread



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
G 1/4	-0.9	0	80 bar	max. switching pressure difference	Any	R412010716


Dimensions in mm

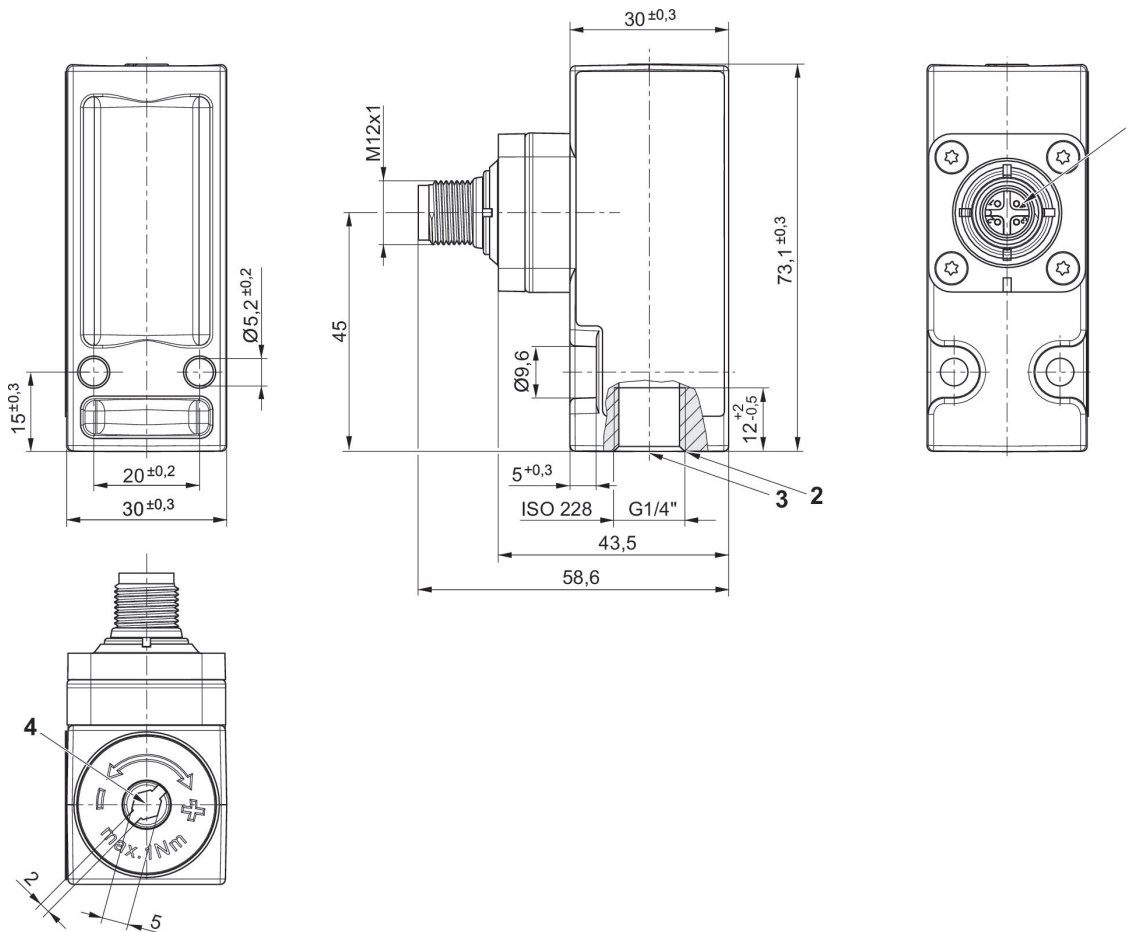

- 1) M12 connection rotatable by 90° and 30° with detent
- 2) sealing surface
- 3) Mounting screw
- 4) Adjustment screw, self-holding

R412010716

Pin assignments




Pressure Switches, Series PM1

Plug
EN 175301-803, form A
Flange with O-ring



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
Ø 5x1,5	-0.9	0	80 bar	max. switching pressure difference	Any	R412010714
Ø 5x1,5	0.2	16	80 bar	max. switching pressure difference	Any	R412010718


Dimensions in mm

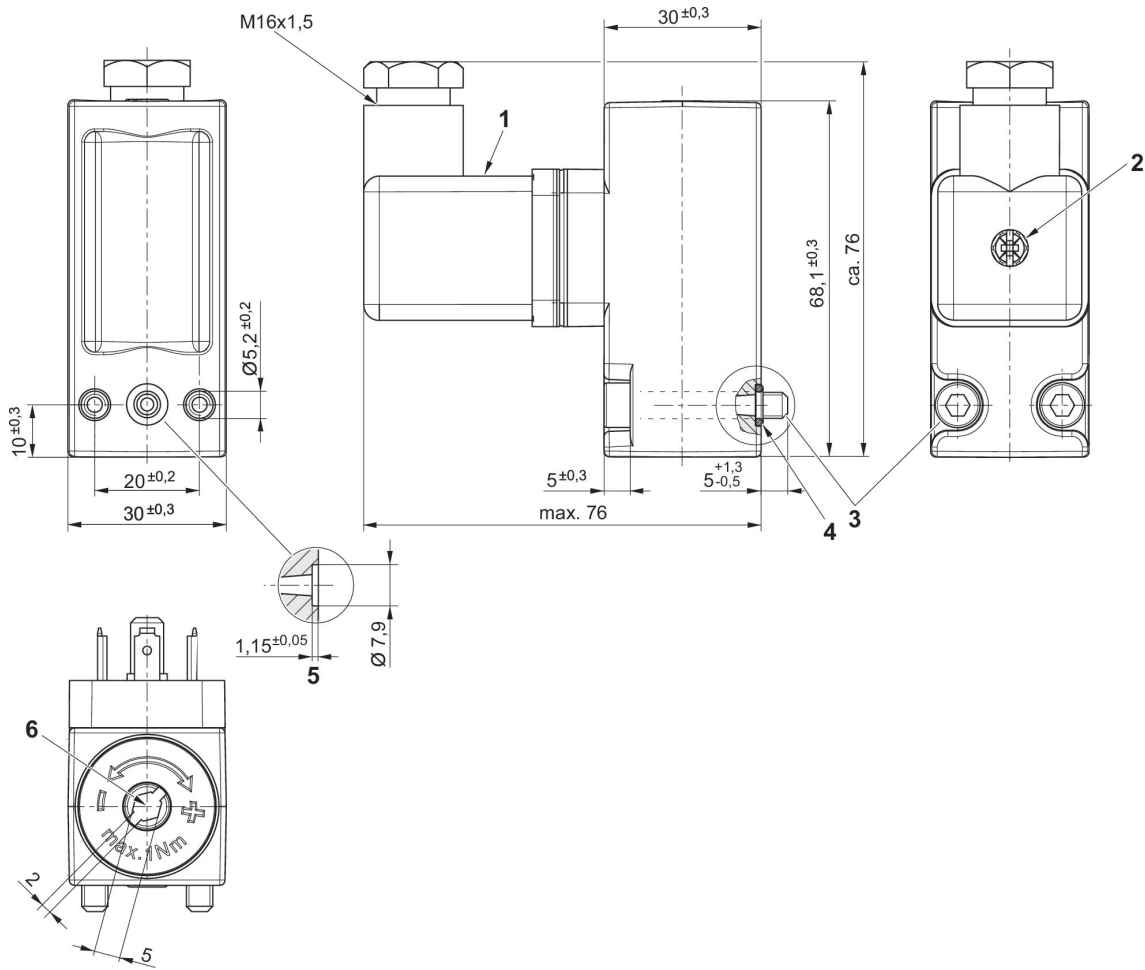

- 1) Valve plug connector
- 2) Mounting screw
- 3) cylinder screw M5x30 (included in scope of delivery)
- 4) O-ring $\varnothing 5 \times 1,5$ (included)
- 5) O-ring countersink
- 6) Adjustment screw, self-holding



R412010714, R412010718

PIN assignment for valve plug connectors




Pressure Switches, Series PM1

Plug
EN 175301-803, form A
Flange with O-ring



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
Ø 5x1,5	0.2	16	80 bar	max. switching pressure difference	Any	R412010715


Dimensions in mm

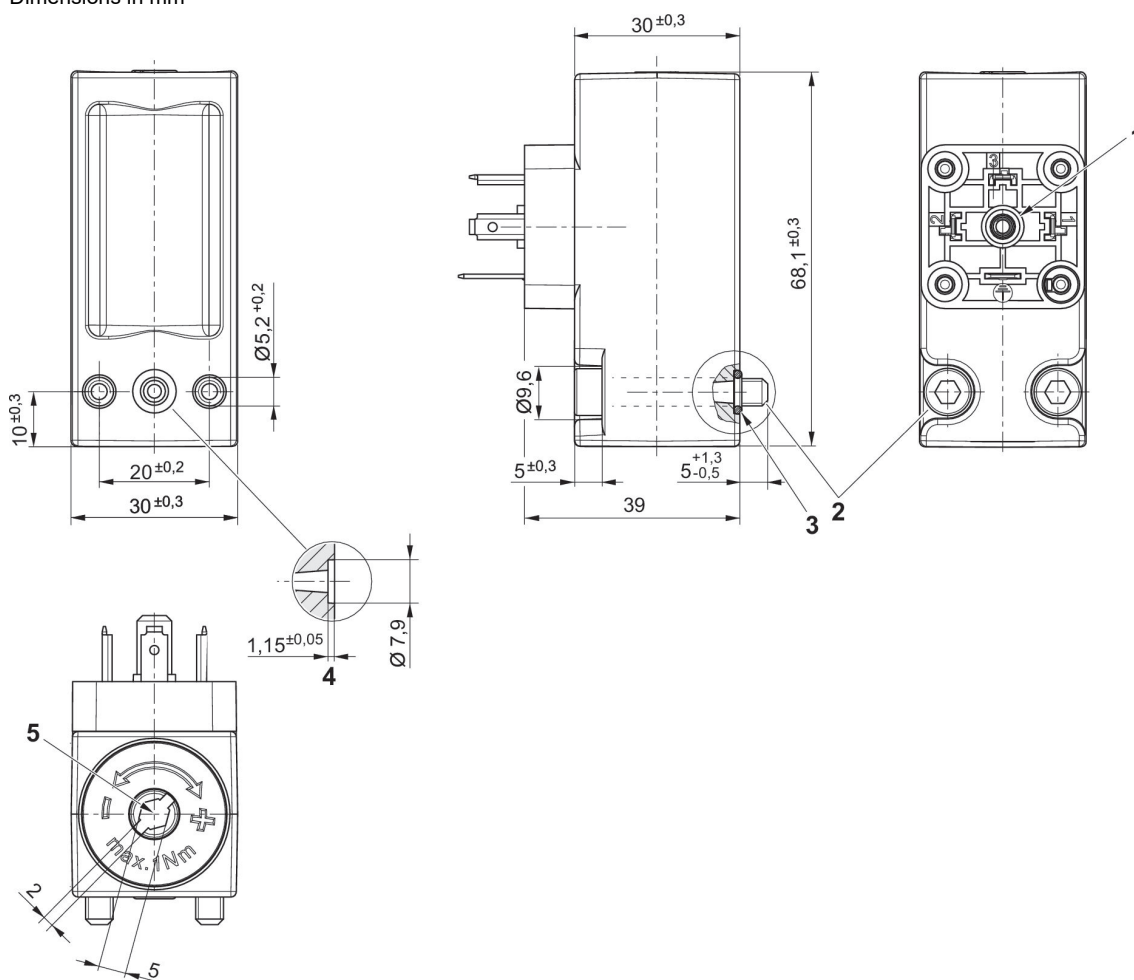

- 1) Mounting screw
- 2) cylinder screw M5x30 (included in scope of delivery)
- 3) O-ring Ø5x1,5 (included)
- 4) O-ring countersink
- 5) Adjustment screw, self-holding



R412010715

PIN assignment for valve plug connectors




Pressure Switches, Series PM1

Plug
M12x1
Flange with O-ring



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
Ø 5x1,5	-0.9	0	80 bar	max. switching pressure difference	Any	R412010719


Dimensions in mm

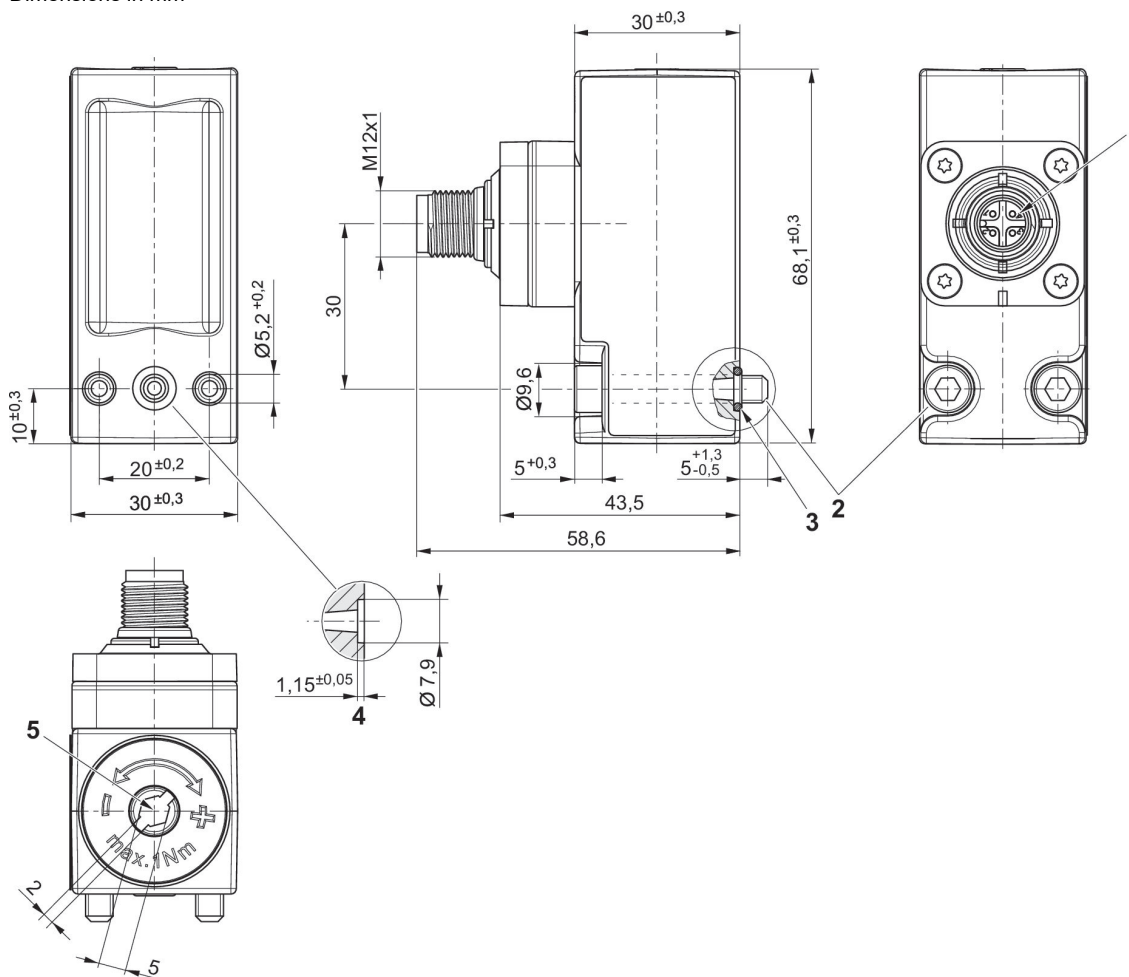

- 1) M12 connection rotatable by 90° and 30° with detent
- 2) cylinder screw M5x30 (included in scope of delivery)
- 3) O-ring Ø5x1,5 (included)
- 4) O-ring countersink
- 5) Adjustment screw, self-holding



R412010719

Pin assignments




Pressure Switches, Series PM1

Plug
M12x1
Flange with O-ring



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
Ø 5x1,5	0.2	16	80 bar	max. switching pressure difference	Any	R412010720


Dimensions in mm

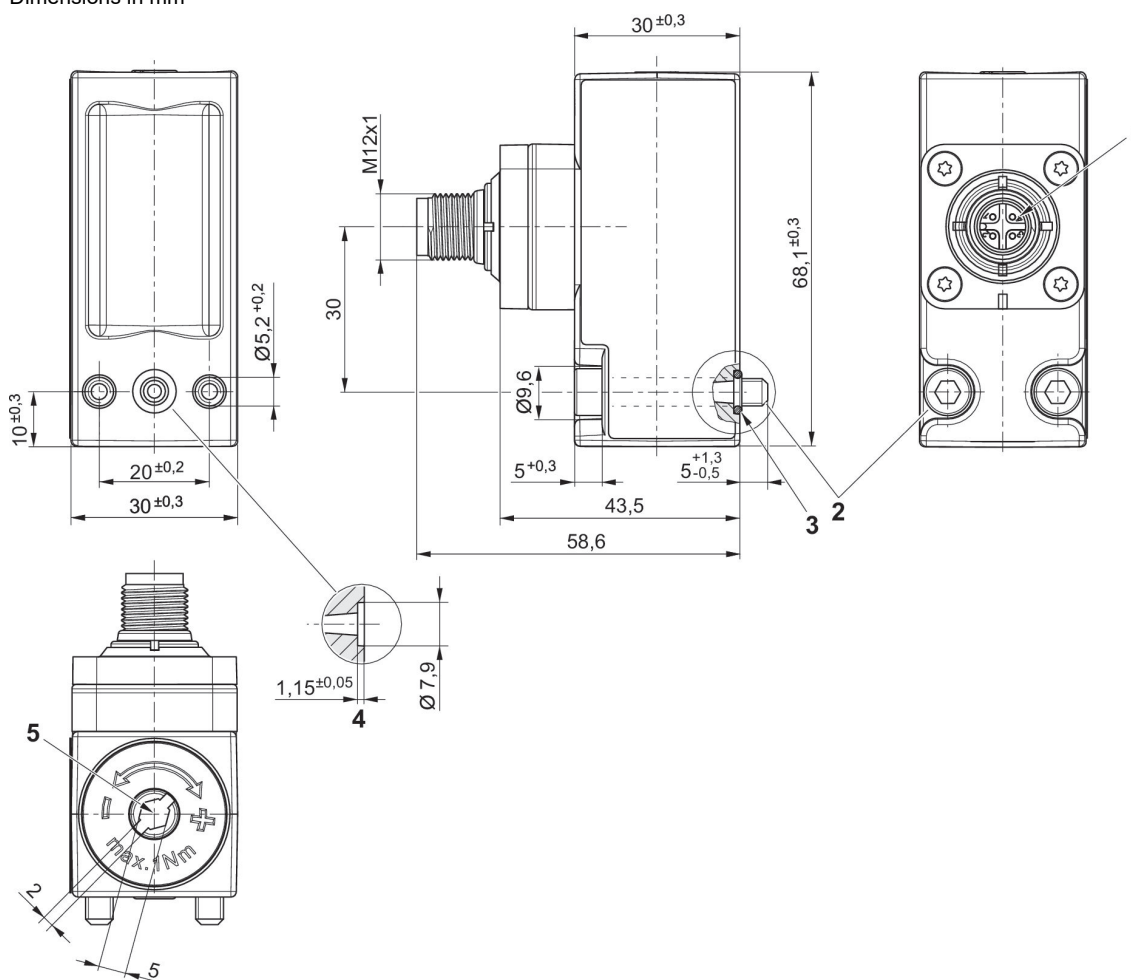

- 1) M12 connection rotatable by 90° and 30° with detent
- 2) cylinder screw M5x30 (included in scope of delivery)
- 3) O-ring Ø5x1,5 (included)
- 4) O-ring countersink
- 5) adjustment screw



R412010720

Pin assignments




Pressure Switches, Series PM1

Plug
EN 175301-803, form A



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Hysteresis	Mounting orientation	Part No.
CNOMO	0.2	16	80 bar	max. switching pressure difference	Any	R412010721


Dimensions in mm

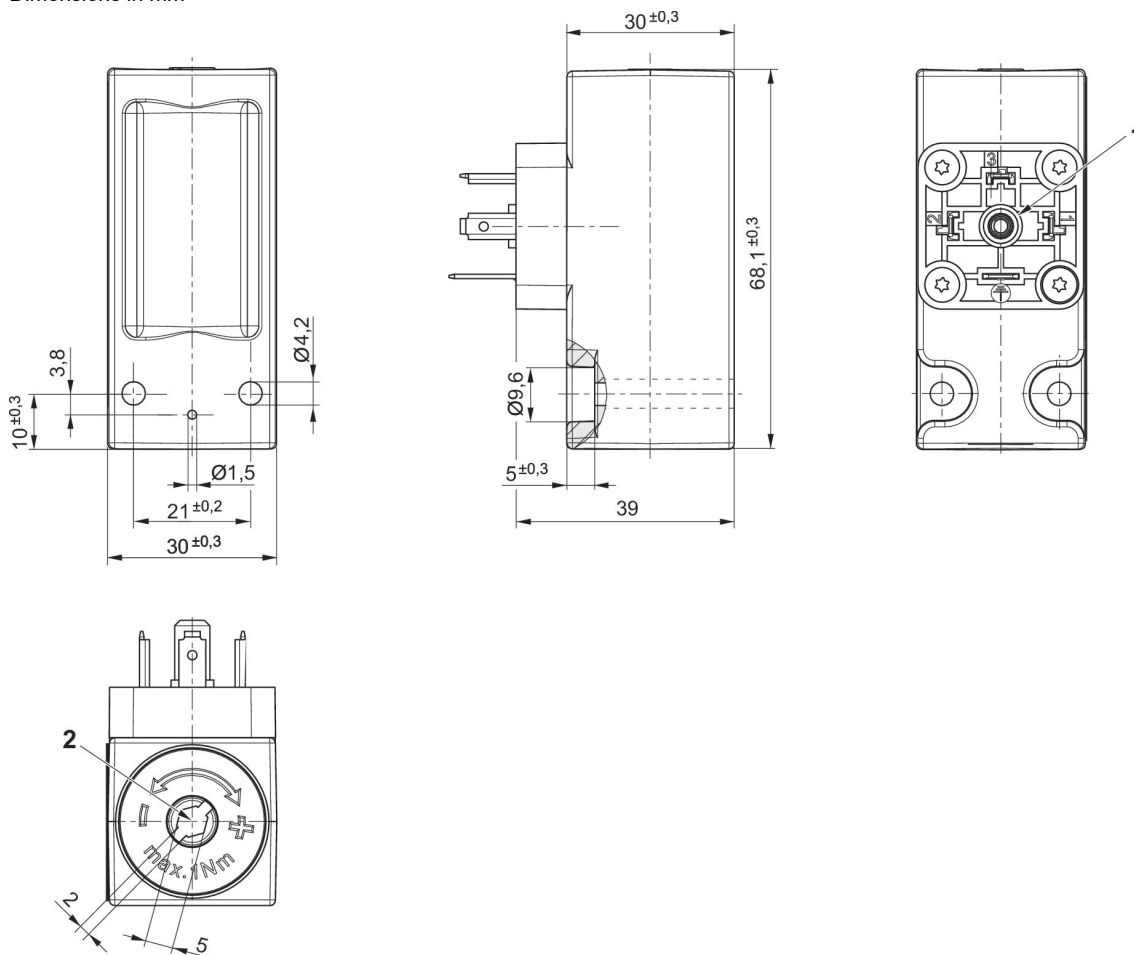

- 1) Mounting screw
- 2) Adjustment screw, self-holding

R412010721

PIN assignment for valve plug connectors




Pressure Switches, Series PM1

open cable ends
Internal thread
ATEX



Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Mounting orientation	Cable length L [m]	Part No.
G 1/4	-0.9	1	60 bar	Any	3	R412010730
G 1/4	0.2	16	60 bar	Any	3	R412010731
G 1/4	-0.9	1	60 bar	Any	7	R412024680
G 1/4	0.2	16	60 bar	Any	7	R412024681


Dimensions in mm

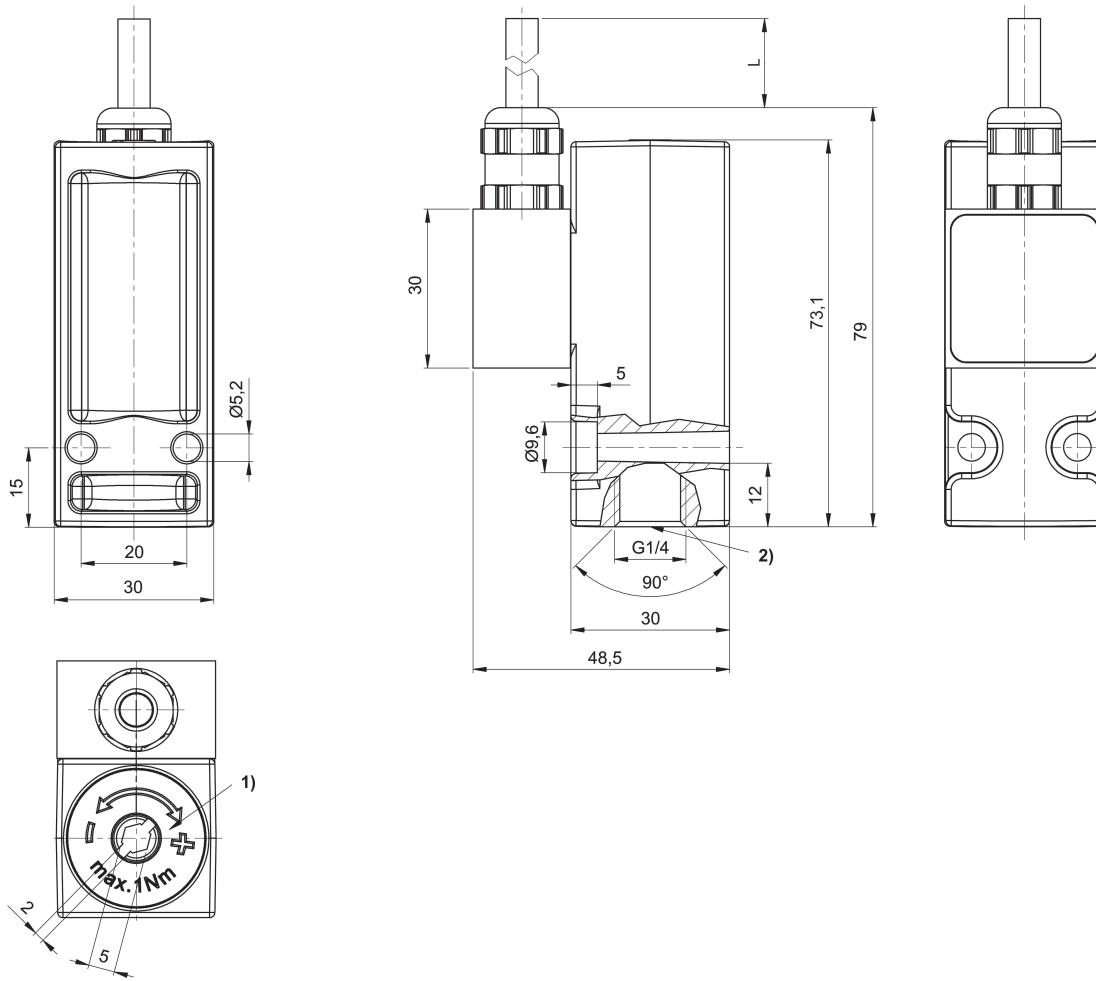

- 1) Adjustment screw, self-holding
- 2) Tightening torque MA = 12 + 1 Nm


Pressure Switches, Series PM1

open cable ends
Flange with O-ring
ATEX




Thread connection	Operating pressure min [bar]	Operating pressure max [bar]	Protection against overpressure	Mounting orientation	Cable length L [m]	Part No.
Ø 5x1,5	0.2	16	60 bar	Any	3	R412010732
Ø 5x1,5	2	16	60 bar	Any	7	R412024682
Ø 5x1,5	-0.9	1	60 bar	Any	3	R412024760
Ø 5x1,5	-0.9	1	60 bar	Any	7	R412024761

Dimensions in mm

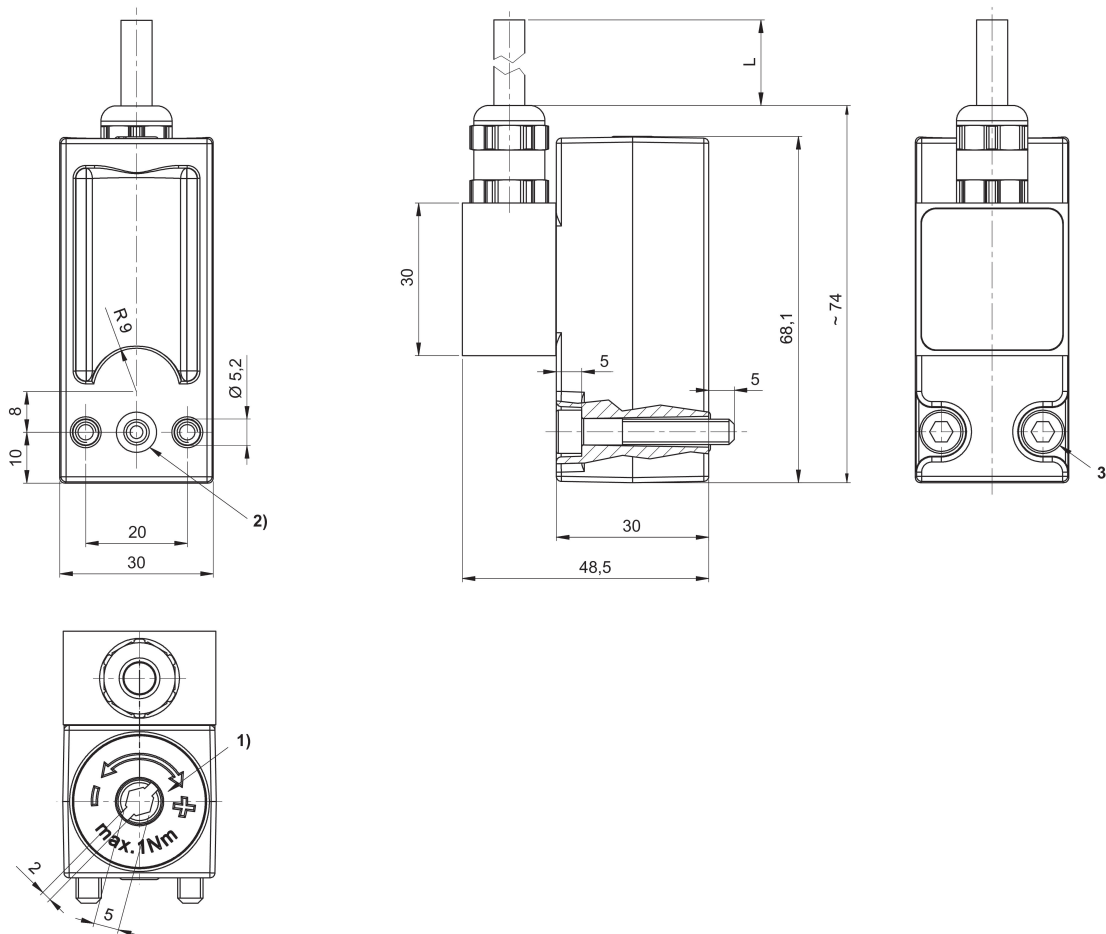


- 1) Adjustment screw, self-holding
- 2) O-ring Ø5x1,5 (included)
- 3) cylinder screw M5x30 (included in scope of delivery)

Double nipple, Series PE5



Compressed air connection	Delivery unit [piece]	Weight [kg]	Part No.
G 1/4	2	0.04	R412010015
G 1/4	2	0.04	R412010016

Dimensions

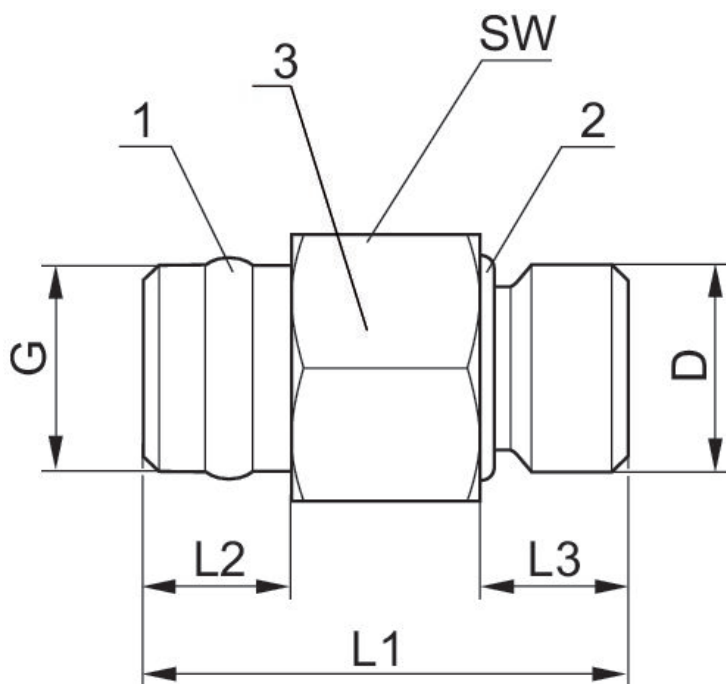

- 1) sealing ring Polytetrafluorethylen
- 2) O-ring - acrylonitrile butadiene rubber
- 3) Housing - brass, nickel-plated

Part No.	Port G	Port D	L1	L2	L3	SW
R412010015	G 1/4	G 1/8	30	10	8.5	17
R412010016	G 1/4	G 1/4	30	10	8.5	17


Double nipple

External thread
External thread



G	Ø D	Delivery unit [piece]	Part No.
G 1/4	G 1/8	10	1823391016
G 1/4	G 1/4	10	1823391017

Dimensions

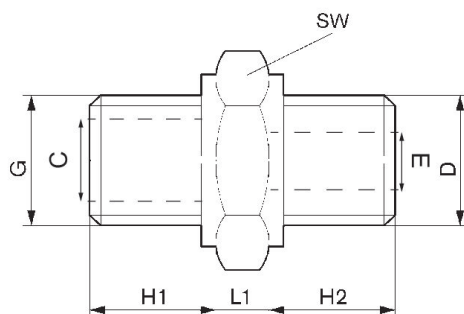

Part No.	Port D	Port G	ØC	ØE	H1	H2	L1	SW
1823391081	M5	M5	-	2	4.5	4.5	4	8
1823391100	M5	G 1/8	-	-	7	5	5	13
1823391015	G 1/8	G 1/8	8	5	7.5	7.5	4	14
1823391016	G 1/8	G 1/4	8	5	10	7	5	17
1823391017	G 1/4	G 1/4	8	7.5	10	10	5	17
1823391018	G 1/4	G 3/8	12	7.5	10	10	5	22
1823391019	G 3/8	G 3/8	12	10	10	10	5	22
1823391020	G 3/8	G 1/2	15	10	12	10	6	27
1823391029	G 1/2	G 1/2	15	13	12	12	6	27
1823391286	G 1/2	G 3/4	20	13	12	12	7	32
1823391287	G 3/4	G 3/4	20	18	12	12	7	32
1823391288	G 3/4	G 1	25	18	15	12	8	41
1823391289	G 1	G 1	25	22	15	15	8	41

Valve plug connector, series CON-VP


EN 175301-803, form A
CE declaration of conformity
UKCA



Operational voltage	Max. current [A]	Contact assignment	min. suitable cable Ø [mm]	max. suitable cable Ø [mm]	Part No.
300 V DC / 250 V AC	10	3+E	4	9.5	1834484059

1834484059

Dimensions

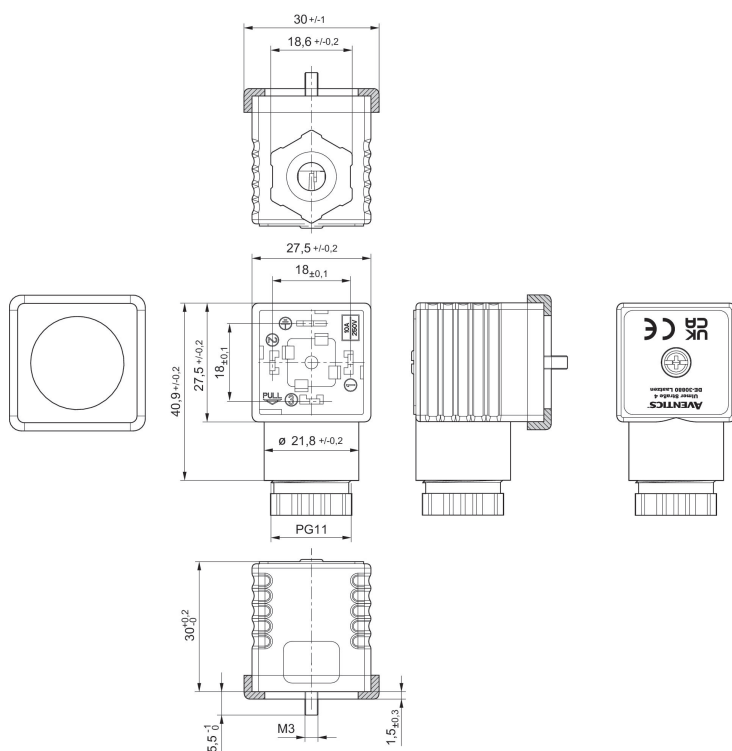

Profile seal

Valve plug connector, series CON-VP


EN 175301-803, form A



Operational voltage	Protective circuit	Max. current [A]	Contact assignment	LED status display	min. suitable cable Ø [mm]	max. suitable cable Ø [mm]	Part No.
24 V DC	2 diodes (1 A)	1	3+E	green/red	4	9.5	8941012462

8941012462


Dimensions

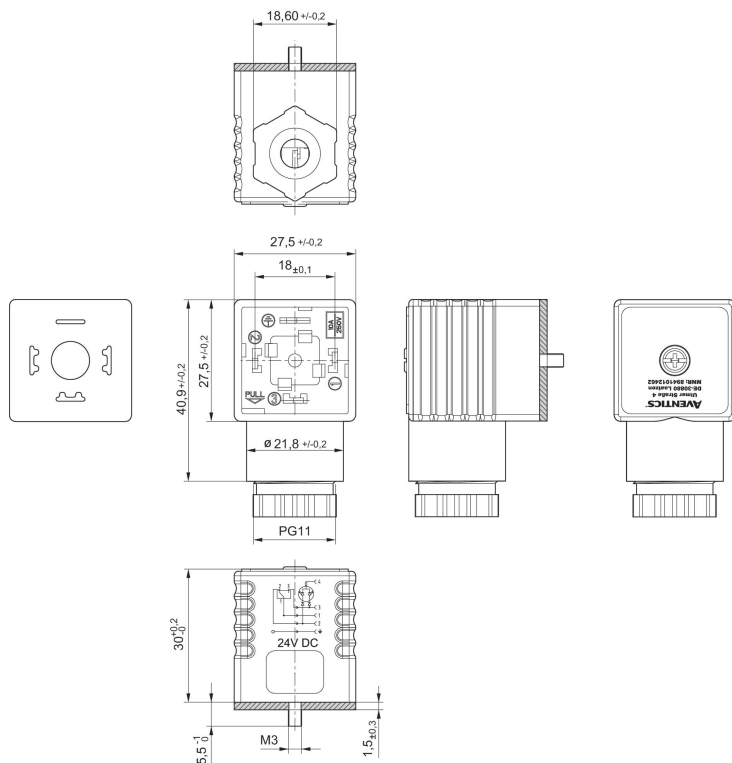

Flat gasket


Round plug connector, Series CON-RD

Socket
M12x1
5-pin



Operational voltage	Current [A]	Shielding	Electrical connection 1, type	Electrical connection 1, thread size	Electrical connection 1, coding	Electrical connection 2, type	Cable length [m]	Cable-Ø [mm]	Wire cross-section [mm²]	Min. ambient temperature [°C]	Max. ambient temperature [°C]	Part No.
48 V AC/DC	4	unshielded	Socket	M12x1	A-coded	open cable ends	3	5.2	0.34	-40	85	1834484259
48 V AC/DC	4	unshielded	Socket	M12x1	A-coded	open cable ends	5	5.2	0.34	-40	85	1834484260
48 V AC/DC	4	unshielded	Socket	M12x1	A-coded	open cable ends	10	5.2	0.34	-40	85	1834484261


Dimensions

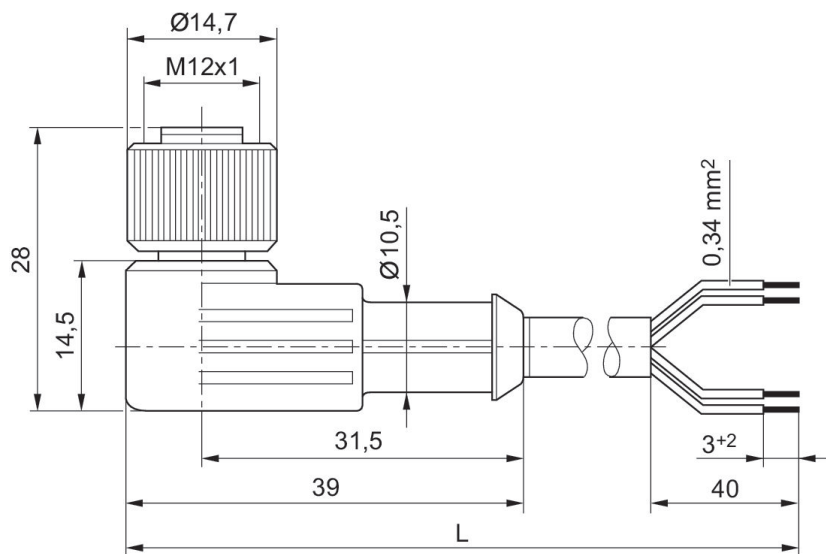

L = length

1834484259, 1834484260, 1834484261

Pin assignment, socket



(1) BN=brown (2) WH=white (3) BU=blue (4) BK=black
(5) not assigned

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



CONSIDER IT SOLVED™