

Serie CC01



Serie CC01

Die AVENTICS Drossel-Rückschlagventile der Serie CC sind für Nenndurchflüsse von 32 bis 5 600 l/Min ausgelegt. Die verfügbaren Varianten haben ein Steck-Fitting oder ein Innengewinde.

- $Q_n = 32 \text{ l/min} \dots 5600 \text{ l/min}$




Drosselrückschlagventil, Serie CC01

Innengewinde
Innengewinde



Eingang	Ausgang	Typ Druckluftan- schluss Eingang	Qn 1 > 2 [l/min]	Materialnummer
G 1/8	G 1/8	Innengewinde	32	0821200009
G 1/8	G 1/8	Innengewinde	130	0821200008
G 1/4	G 1/4	Innengewinde	550	0821200005

Abmessungen

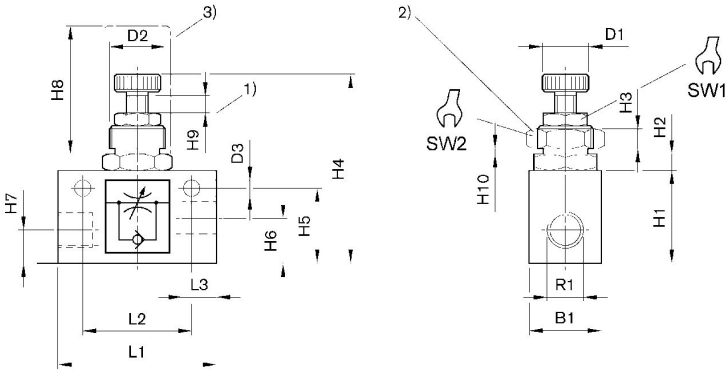

1) Einstellbereich 2) Mutter für Schalttafeleinbau 3) Schutzkappe

Material- nummer	Anschluss G	R1	B1	D1	D2	D3	H1	H2	H3	H4
0821200009	G 1/8	G 1/8	16	10	M12x1	4.5	20	4	4	56
0821200008	G 1/8	G 1/8	16	10	M12x1	4.5	20	4	4	56
0821200005	G 1/4	G 1/4	25	13	M20x1,5	5.5	32	5.5	6	70

Material- nummer	H5	H6	H7	H8	H9	H10	L1	L2	L3	SW1
0821200009	16.5	8	8	35	4	3.5	35	25	8	10
0821200008	16.5	8	8	35	4	3.5	35	25	8	10
0821200005	26	15	11	40	5	3.5	55	38	12	13

Material- nummer	SW2
0821200009	17
0821200008	17
0821200005	24


Serie CC01

Innengewinde
Innengewinde



Eingang	Ausgang	Typ Druckluftan- schluss Eingang	Qn 1 > 2 [l/min]	Materialnummer
G 3/8	G 3/8	Innengewinde	1600	0821200014

Abmessungen

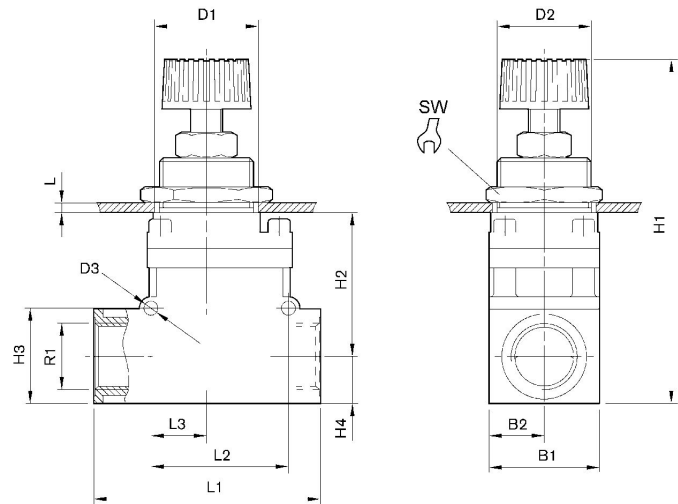

Material- nummer	Anschluss G	R1	B1	B2	D1	D2	D3	H1	H2	H3
0821200014	G 3/8	G 3/8	35	17.5	30.5	30	4.5	102–109	46	30

Material- nummer	H4	L 1)	L1	L2	L3	SW
0821200014	15	12	72	44	18	36

1) Max.


Serie CC01

Innengewinde
Innengewinde



Eingang	Ausgang	Typ Druckluftan- schluss Eingang	Qn 1 > 2 [l/min]	Materialnummer
G 1/2	G 1/2	Innengewinde	2750	0821200003

Abmessungen

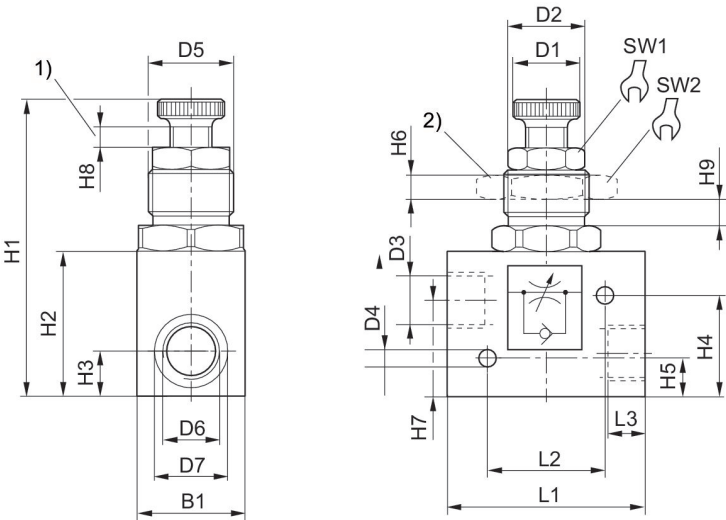

1) Einstellbereich 2) Mutter für Schalttafeleinbau

Material- nummer	Anschluss G	R1	B1	D1	D2	D3	H1	H2	H3	H4
0821200003	G 1/2	G 1/2	40	27	25	27.5	120	50	17	40.5

Material- nummer	H5	H6	H7	H8	H9	H10 1)	L1	L2	L3	R2
0821200003	15.5	9	38	6.5	8	9	75.3	45	14	M32x1,5

Material- nummer	SW1	SW2	Gewicht kg
0821200003	24	46	

1) Max.


Serie CC01

Innengewinde
Innengewinde



Eingang	Ausgang	Typ Druckluftan- schluss Eingang	Qn 1 > 2 [l/min]	Materialnummer
G 3/4	G 3/4	Innengewinde	5400	0821200015
G 1	G 1	Innengewinde	5600	0821200016

Abmessungen

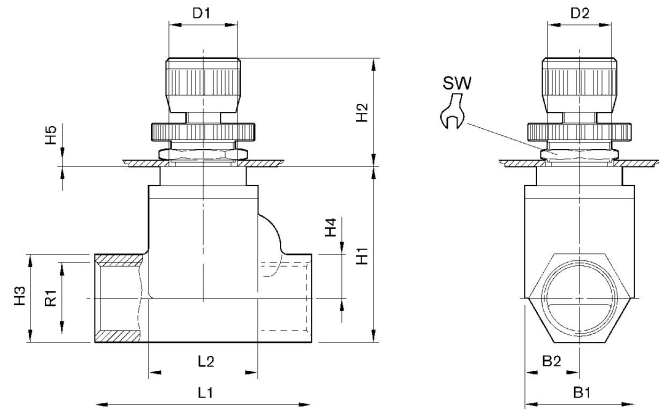

Material- nummer	Anschluss G	R1	B1	B2	D1	D2	H1	H2	H3	H4
0821200015	G 3/4	G 3/4	50	25	30.5	30	82	47–57,5	41	20.5
0821200016	G 1	G 1	50	25	30.5	30	82	47–57,5	41	20.5

Material- nummer	H5 1)	L1	L2	SW
0821200015	6	100	51	36
0821200016	6	100	51	36

1) Max.


Serie CC01

Innengewinde
Innengewinde



Eingang	Ausgang	Typ Druckluftan- schluss Eingang	Qn 1 > 2 [l/min]	Materialnummer
M5	M5	Innengewinde	130	5341120000
G 1/8	G 1/8	Innengewinde	100	5341121100
G 1/4	G 1/4	Innengewinde	500	5341122100
G 3/8	G 3/8	Innengewinde	1300	5341123100
G 1/2	G 1/2	Innengewinde	1650	5341124100

Abmessungen

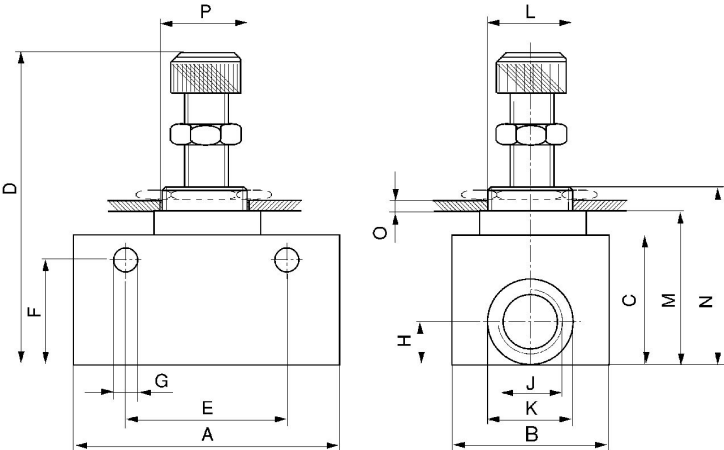

Material- nummer	Anschluss G	J	A	B	C	D	E	F	Ø G	H
5341120000	M5	M5	26	14	16	40–45	18	12.5	4.4	6
5341121100	G 1/8	G 1/8	32	16	22	44–56	24	18	4.3	10
5341122100	G 1/4	G 1/4	55	25	32	66–74	35	25	6.4	12
5341123100	G 3/8	G 3/8	58	30	40	78–93	44	33	6.6	14
5341124100	G 1/2	G 1/2	68	30	40	77–92	50	33	6.4	14

Material- nummer	Ø K	L	M	N	O	Ø P
5341120000	8.7	M10x1	20	26	2	10.5
5341121100	14.4	M12x1	26	33.6	2	12.5
5341122100	19.5	M20x1,5	37.8	47.9	3	20.5


Material- nummer	Ø K	L	M	N	O	Ø P
5341123100	23	M24x1,5	47	57	3	25
5341124100	27.5	M24x1,5	47	57	3	25

Schutzkappe



Liefereinheit [Stück]	Materialnummer
10	1823317003
10	1823317002

Abmessungen

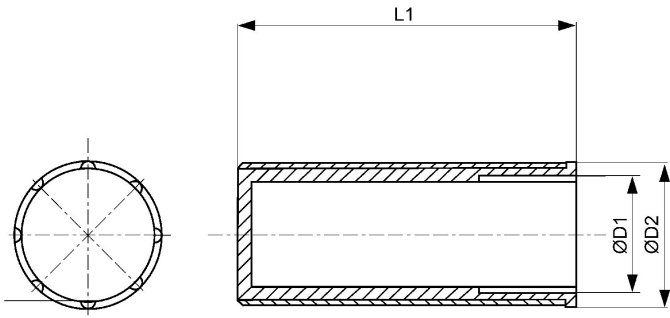


Material- nummer	Ø D1	Ø D2	L1
1823317003	M12x1	15	35
1823317002	M20x1,5	24	40

Sechskantmutter für Schalttafeleinbau



Liefereinheit [Stück]	Materialnummer
10	1823300009
5	1823300010

Abmessungen

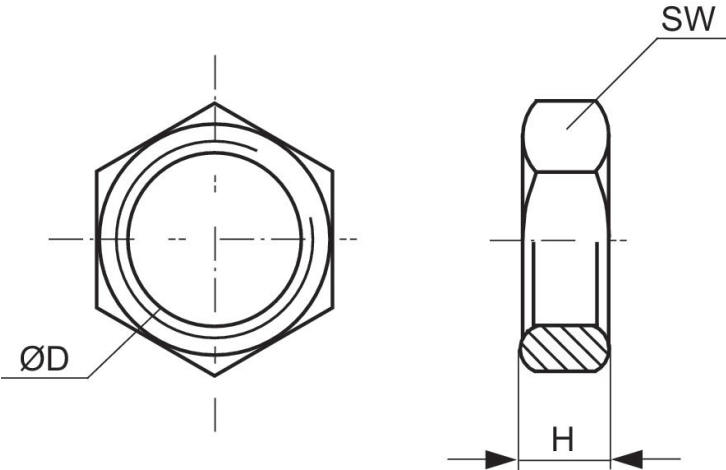

Material- nummer	Ø D	H	SW
1823300028	M12x1	4	17
1823300009	M20x1,5	6	24
1823300010	M32x1,5	9	46

Efficient pneumatic solutions, our program:
cylinders and drives, valves and valve systems,
air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



EMERSON™

CONSIDER IT SOLVED™