

Serie CC01



Serie CC01

Las válvulas antirretorno AVENTICS serie CC están diseñadas para caudales nominales de 32 a 5600 l/min. Las diferentes versiones están disponibles con un adaptador a presión o una rosca interna.

- $Q_n = 32 \text{ l/min} \dots 5600 \text{ l/min}$




Válvula estranguladora antirretorno, Serie CC01

Rosca interior
Rosca interior



entrada	salida	Tipo de conexión de aire comprimido entrada	Qn 1 > 2 [l/min]	N° de material
G 1/8	G 1/8	Rosca interior	32	0821200009
G 1/8	G 1/8	Rosca interior	130	0821200008
G 1/4	G 1/4	Rosca interior	550	0821200005

Dimensiones

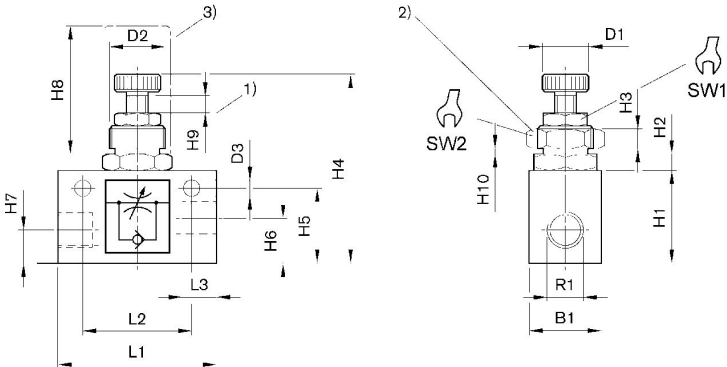

1) gama de regulación 2) tuerca para el montaje en el panel 3) caperuza protectora

N° de material	Orificio G	R1	B1	D1	D2	D3	H1	H2	H3	H4
0821200009	G 1/8	G 1/8	16	10	M12x1	4.5	20	4	4	56
0821200008	G 1/8	G 1/8	16	10	M12x1	4.5	20	4	4	56
0821200005	G 1/4	G 1/4	25	13	M20x1,5	5.5	32	5.5	6	70

N° de material	H5	H6	H7	H8	H9	H10	L1	L2	L3	SW1
0821200009	16.5	8	8	35	4	3.5	35	25	8	10
0821200008	16.5	8	8	35	4	3.5	35	25	8	10
0821200005	26	15	11	40	5	3.5	55	38	12	13

N° de material	SW2
0821200009	17
0821200008	17
0821200005	24


Serie CC01

Rosca interior
Rosca interior



entrada	salida	Tipo de conexión de aire comprimido entrada	Qn 1 > 2 [l/min]	N° de material
G 3/8	G 3/8	Rosca interior	1600	0821200014

Dimensiones

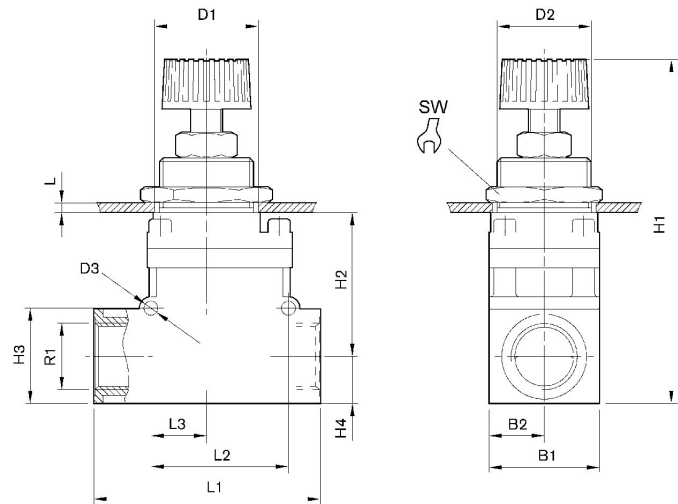

N° de material	Orificio G	R1	B1	B2	D1	D2	D3	H1	H2	H3
0821200014	G 3/8	G 3/8	35	17.5	30.5	30	4.5	102-109	46	30

N° de material	H4	L 1)	L1	L2	L3	SW
0821200014	15	12	72	44	18	36

1) Máx.


Serie CC01

Rosca interior
Rosca interior



entrada	salida	Tipo de conexión de aire comprimido entrada	Qn 1 > 2 [l/min]	N° de material
G 1/2	G 1/2	Rosca interior	2750	0821200003

Dimensiones

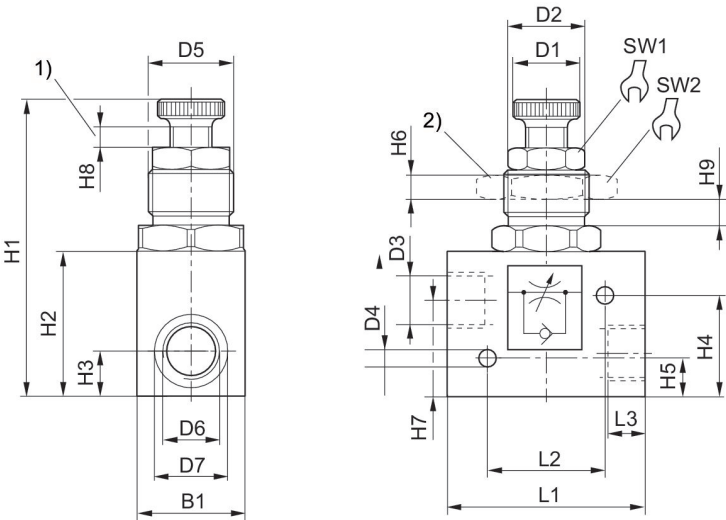

1) gama de regulación 2) tuerca para el montaje en el panel

N° de material	Orificio G	R1	B1	D1	D2	D3	H1	H2	H3	H4
0821200003	G 1/2	G 1/2	40	27	25	27.5	120	50	17	40.5


N° de material	H5	H6	H7	H8	H9	H10 1)	L1	L2	L3	R2
0821200003	15.5	9	38	6.5	8	9	75.3	45	14	M32x1,5

N° de material	SW1	SW2	Peso kg
0821200003	24	46	

1) Máx.


Serie CC01

Rosca interior
Rosca interior



entrada	salida	Tipo de conexión de aire comprimido entrada	Qn 1 > 2 [l/min]	N° de material
G 3/4	G 3/4	Rosca interior	5400	0821200015
G 1	G 1	Rosca interior	5600	0821200016

Dimensiones

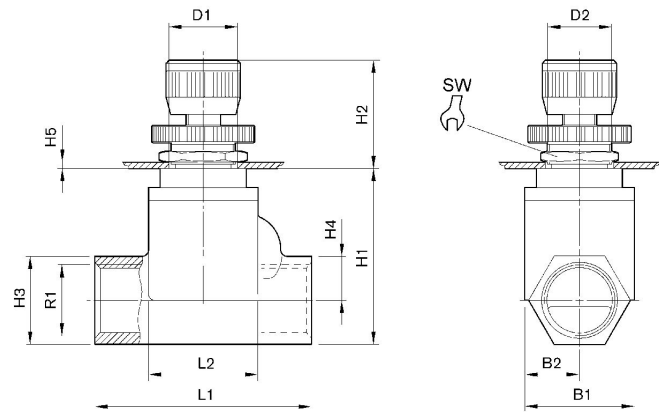

N° de material	Orificio G	R1	B1	B2	D1	D2	H1	H2	H3	H4
0821200015	G 3/4	G 3/4	50	25	30.5	30	82	47-57,5	41	20.5
0821200016	G 1	G 1	50	25	30.5	30	82	47-57,5	41	20.5

N° de material	H5 1)	L1	L2	SW
0821200015	6	100	51	36
0821200016	6	100	51	36

1) Máx.


Serie CC01

Rosca interior
Rosca interior



entrada	salida	Tipo de conexión de aire comprimido entrada	Qn 1 > 2 [l/min]	N° de material
M5	M5	Rosca interior	130	5341120000
G 1/8	G 1/8	Rosca interior	100	5341121100
G 1/4	G 1/4	Rosca interior	500	5341122100
G 3/8	G 3/8	Rosca interior	1300	5341123100
G 1/2	G 1/2	Rosca interior	1650	5341124100

Dimensiones

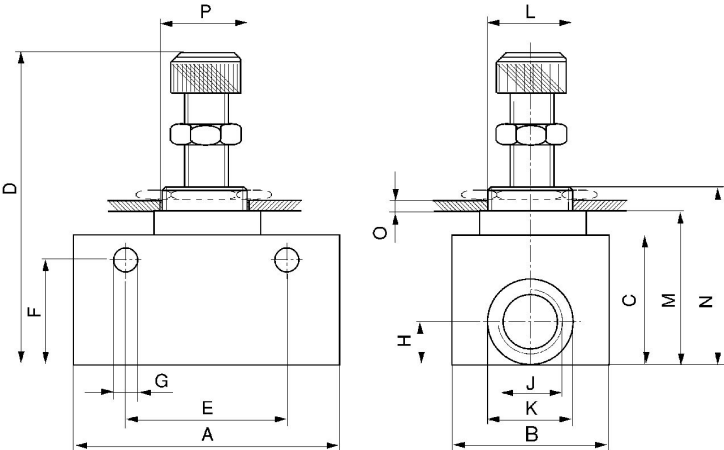

N° de material	Orificio G	J	A	B	C	D	E	F	Ø G	H
5341120000	M5	M5	26	14	16	40–45	18	12.5	4.4	6
5341121100	G 1/8	G 1/8	32	16	22	44–56	24	18	4.3	10
5341122100	G 1/4	G 1/4	55	25	32	66–74	35	25	6.4	12
5341123100	G 3/8	G 3/8	58	30	40	78–93	44	33	6.6	14
5341124100	G 1/2	G 1/2	68	30	40	77–92	50	33	6.4	14

N° de material	Ø K	L	M	N	O	Ø P
5341120000	8.7	M10x1	20	26	2	10.5
5341121100	14.4	M12x1	26	33.6	2	12.5
5341122100	19.5	M20x1,5	37.8	47.9	3	20.5
5341123100	23	M24x1,5	47	57	3	25


N° de material	Ø K	L	M	N	O	Ø P
5341124100	27.5	M24x1,5	47	57	3	25

Caperuza protectora



Unidad de suministro [Unidades]	N° de material
10	1823317003
10	1823317002

Dimensiones

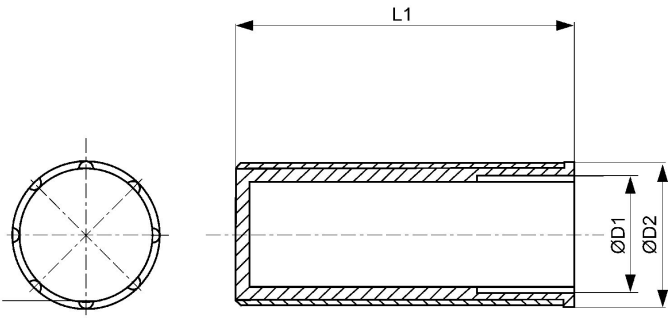


N° de material	Ø D1	Ø D2	L1
1823317003	M12x1	15	35
1823317002	M20x1,5	24	40

Tuerca hexagonal para montaje en panel



Unidad de suministro [Unidades]	Nº de material
10	1823300009
5	1823300010

Dimensiones

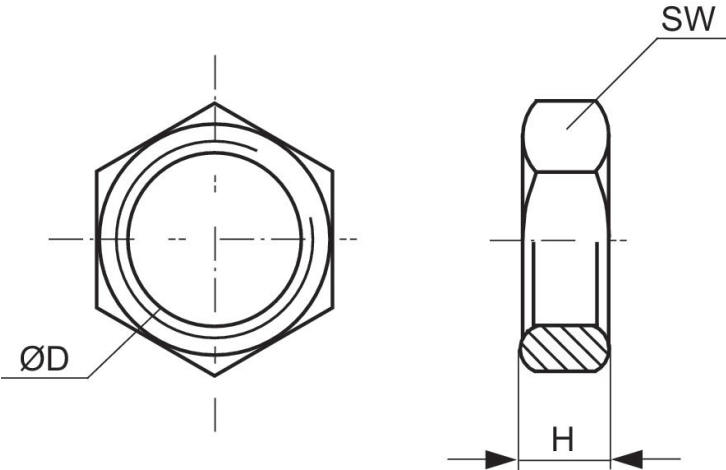

Nº de material	Ø D	H	SW
1823300028	M12x1	4	17
1823300009	M20x1,5	6	24
1823300010	M32x1,5	9	46

Efficient pneumatic solutions, our program:
cylinders and drives, valves and valve systems,
air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



EMERSON™

CONSIDER IT SOLVED™