

系列 573



系列 573


安沃驰 573 系列快速排气阀设计用于大流量应用，因其排气流速可高达 12000 l/min。

- $Q_n = 220 \text{ l/min} \dots 12\,000 \text{ l/min}$
- 内螺纹 / 内螺纹




快速通风阀, 系列 573

内螺纹
内螺纹



输入	类型 压缩空气 气 接口 入口	输出	类型 压缩空气 气 接口 出口	压缩空气 连接 排气	压缩空气 接口 3 型号	Qn 1 > 2 [l/min]	Qn 2 > 3 [l/min]	物料号
M5	内螺纹	M5	内螺纹	M5	内螺纹	220	300	5735040900


规格

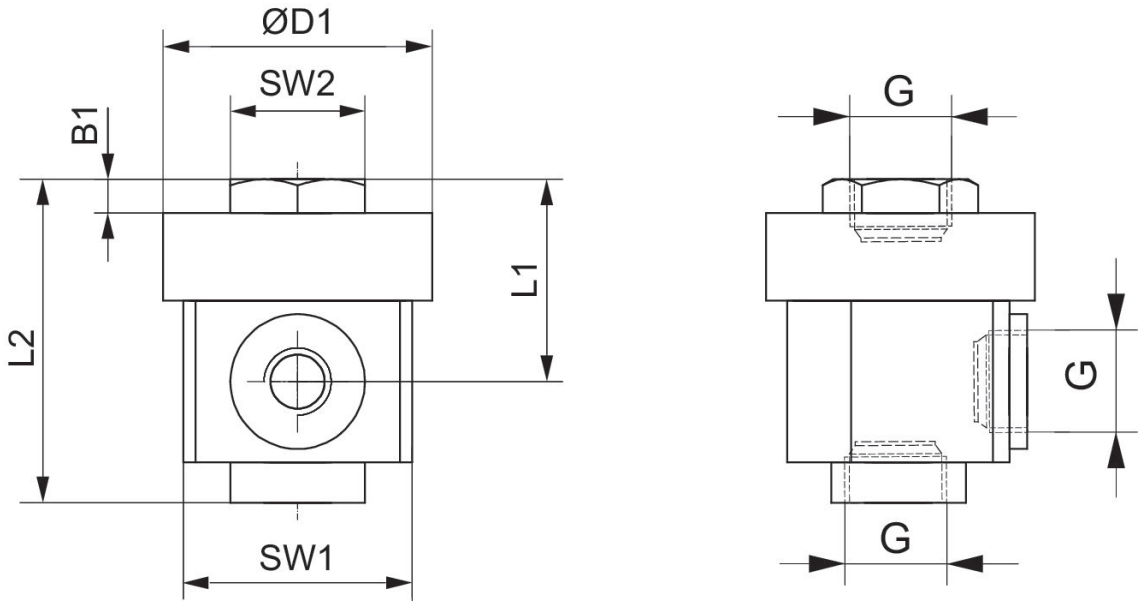

物料号	接口 G	B1	ØD1	L1	L2	SW1	SW2
5735040900	M5	2.5	20	17	25	17	10


快速通风阀, 系列 573

内螺纹
内螺纹



输入	类型 压缩空气 气 接口 入口	输出	类型 压缩空气 气 接口 出口	压缩空气 连接 排气	压缩空气 接口 3 型号	Qn 1 > 2 [l/min]	Qn 2 > 3 [l/min]	物料号
G 1/8	内螺纹	G 1/8	内螺纹	G 1/8	内螺纹	680	1100	5735040000
G 1/4	内螺纹	G 1/4	内螺纹	G 1/4	内螺纹	1200	2100	5735040100
G 3/8	内螺纹	G 3/8	内螺纹	G 3/8	内螺纹	1800	3450	R412010750
G 1/2	内螺纹	G 1/2	内螺纹	G 1/2	内螺纹	3400	6100	5735040300
G 3/4	内螺纹	G 3/4	内螺纹	G 3/4	内螺纹	2500	9800	R412010751
G 1	内螺纹	G 1	内螺纹	G 1	内螺纹	7200	12000	R412010752



规格

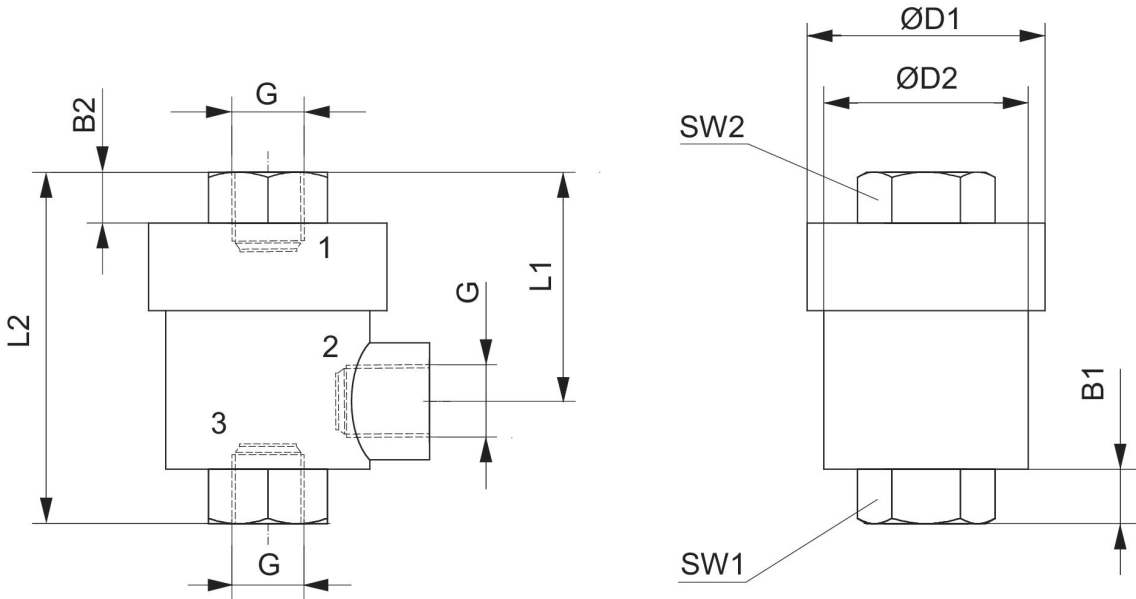

物料号	接口 G	B1	B2	ØD1	ØD2	L1	L2	SW1	SW2
5735040000	G 1/8	6.5	6.5	28	24	27	42	15	15
5735040100	G 1/4	9.5	9	33.5	29.5	35	53	19	19
R412010750	G 3/8	10	10	32.5	29.5	36	56	21	21
R412010751	G 3/4	19	16	49	45.5	55	90	32	32
R412010752	G 1	17	17	80	70	70	110	46	46


快速通风阀

内螺纹
内螺纹



输入	类型 压缩空气接口 入口	输出	类型 压缩空气接口 出口	压缩空气连接 排气	压缩空气接口 3 型号	Qn 1 > 2 [l/min]	Qn 2 > 3 [l/min]	物料号
G 1/4	内螺纹	G 1/4	内螺纹	G 3/8	内螺纹	1000	2050	0821002003
G 3/8	内螺纹	G 3/8	内螺纹	G 3/8	内螺纹	2050	2050	0821002004
G 1/2	内螺纹	G 1/2	内螺纹	G 3/4	内螺纹	3500	7000	0821002002

规格

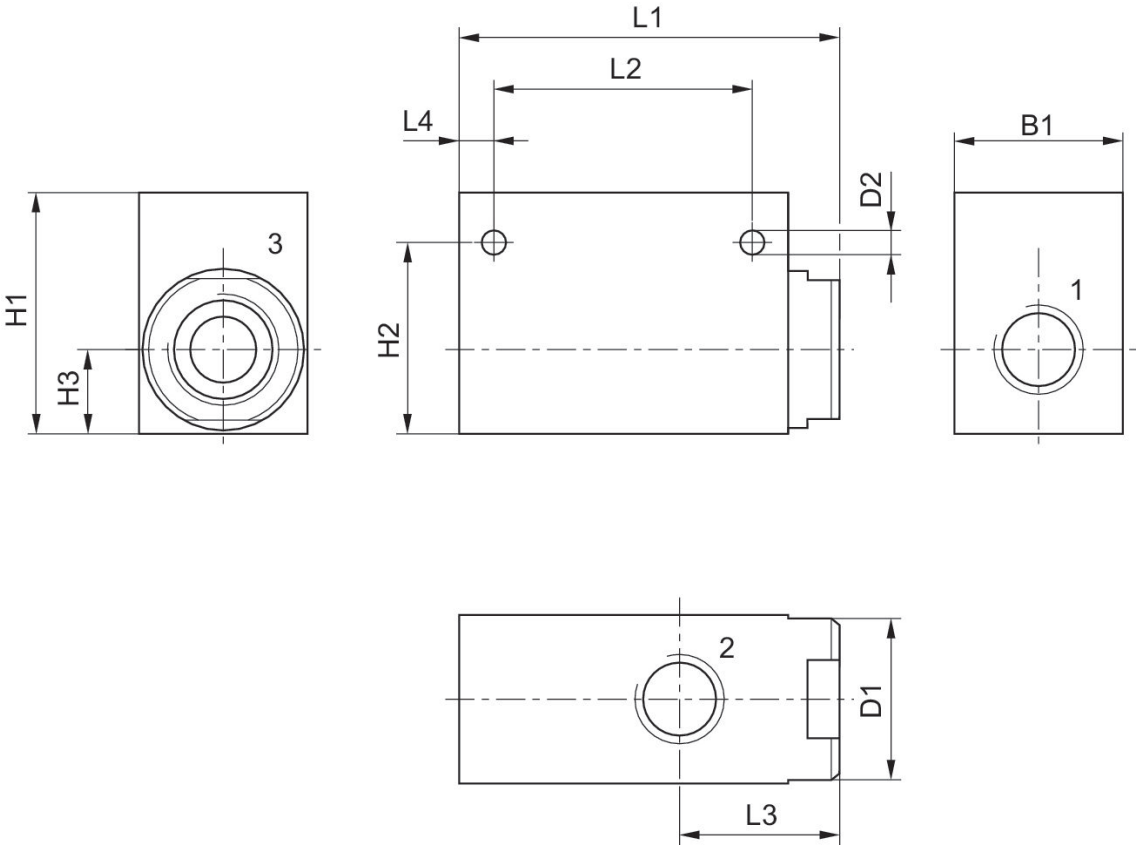

物料号	接口 1	接口 2	接口 3	B1	D1	D2	H1	H2	H3	L1
0821002003	G 1/4	G 1/4	G 3/8	25	25	5.5	36	30.2	13.2	62
0821002004	G 3/8	G 3/8	G 3/8	25	25	5.5	42	30.2	13.2	62
0821002002	G 1/2	G 1/2	G 3/4	44	40	6	55	43	21	78.5

L2	L3	L4
38	26	8.5
38	26	8.5
50	34.5	9

Efficient pneumatic solutions, our program:
cylinders and drives, valves and valve systems,
air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



CONSIDER IT SOLVED™