


QR1

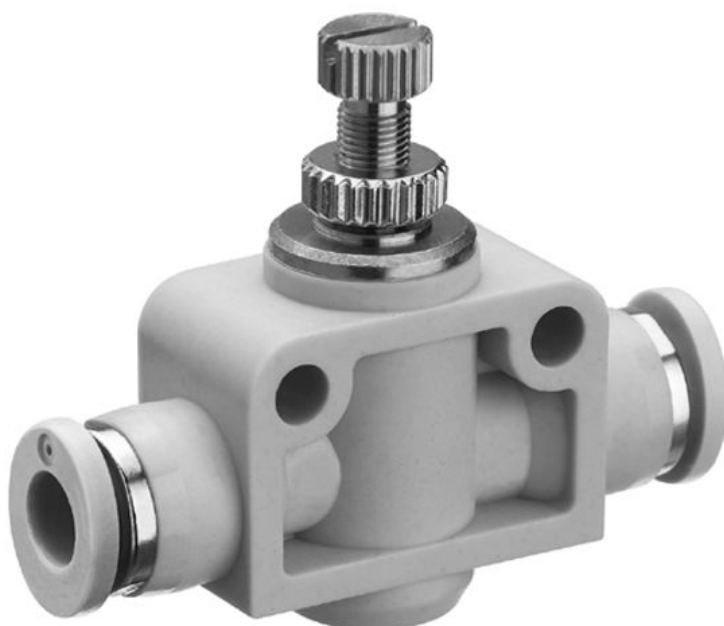

AVENTICS™


Aventics
Drosselrückschlagventile der
Baureihe QR1


EMERSON™

Serie QR1


Die AVENTICS Drosselrückschlagventile der Baureihe QR1 sind für Nenndurchflüsse von 60 bis 875 l/min ausgelegt.

- $Q_n = 60 \text{ l/min} \dots 875 \text{ l/min}$
- Aufgrund von Produktoptimierung kann der ausgelieferte Artikel aktuell von den dargestellten Abmessungen abweichen.

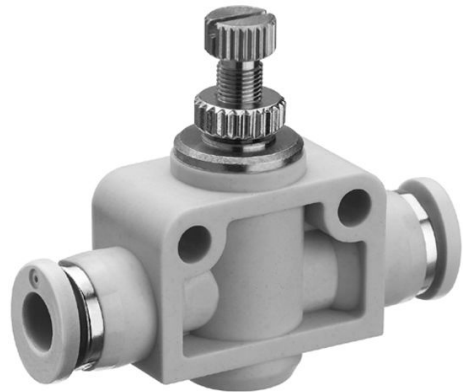


Drosselrückschlagventil, Serie QR1-DBS

Steckanschluss
Steckanschluss




Druckluftanschluss 1	Druckluftanschluss 2	Drosselrichtung	Neendurchfluss Qn 1 zu 2 [l/min]	Werkstoff Gehäuse	Materialnummer
Ø 4	Ø 4	1 > 2	60	Polyamid	R412005454
Ø 6	Ø 6	1 > 2	135	Polyamid	R412005455
Ø 8	Ø 8	1 > 2	200	Polyamid	R412005456
Ø 10	Ø 10	1 > 2	550	Polyamid	R412005457
Ø 12	Ø 12	1 > 2	875	Polyamid	R412005458


R412005454

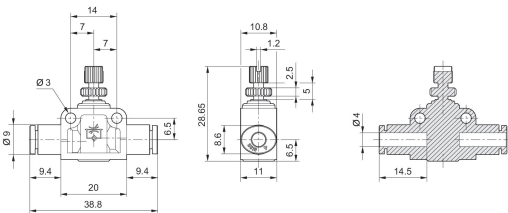


R412005455

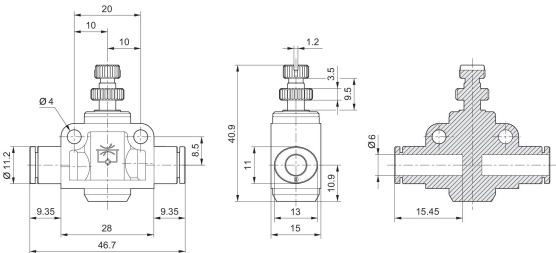


R412005456

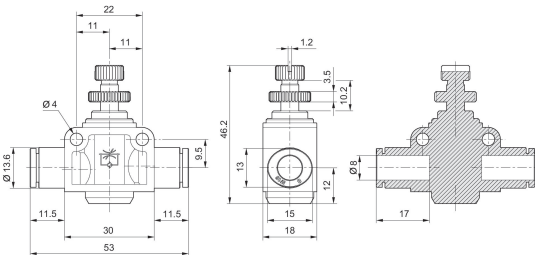

R412005457


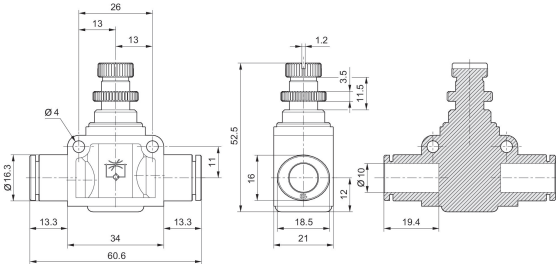


R412005458

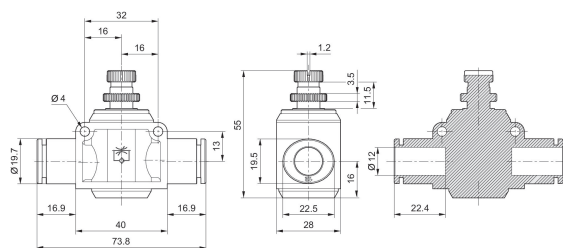


Drosselrückschlagventil, Serie QR1-DBS

Steckanschluss
Steckanschluss



Druckluftanschluss 1	Drosselrichtung	Nenndurchfluss Qn 1 zu 2 [l/min]	Werkstoff Gehäuse	Materialnummer
Ø5/32	1 > 2	60	Polybutylenterephthalat	R432002382
Ø1/4	1 > 2	60	Polybutylenterephthalat	R432002383
Ø5/16	1 > 2	60	Polybutylenterephthalat	R432002384
Ø 3/8	1 > 2	60	Polybutylenterephthalat	R432002385
Ø1/2	1 > 2	60	Polybutylenterephthalat	R432002386


Abmessungen in inch

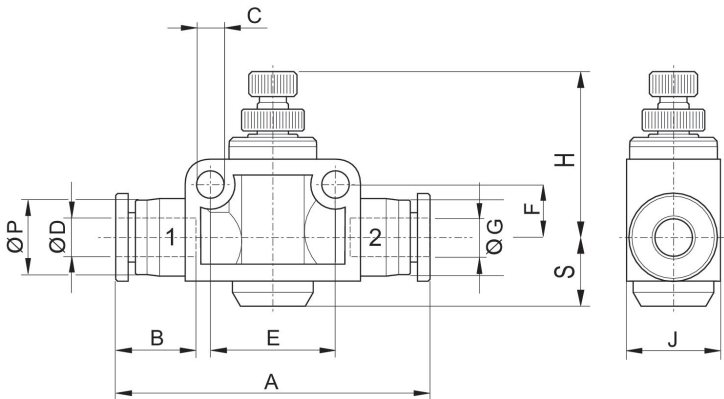

Material- nummer	Ø D	A	B	Ø C	J	H	S	Ø P
R432002382	Ø5/32	1.426	0.63	3.2	0.394	0.701	0.256	0.411
R432002383	Ø1/4	1.682	0.67	4.3	0.591	1.064	0.433	0.489
R432002384	Ø5/16	2.041	0.729	4.3	0.709	1.123	0.473	0.567
R432002385	Ø 3/8	2.348	0.827	4.3	0.827	1.34	0.473	0.693
R432002386	Ø1/2	2.813	0.887	4.3	1.103	1.32	0.63	0.835


Drosselrückschlagventil, Serie QR1-DWA

Steckanschluss
Außengewinde



Druckluftanschluss 1	Druckluftanschluss 2	Drosselrichtung	Nenndurchfluss Qn 1 zu 2 [l/min]	Werkstoff Gehäuse	Materialnummer
10-32 UNF	Ø5/32	2 > 1	2607.6	Polybutylenterephthalat	R432002367
10-32 UNF	Ø1/4	2 > 1	2607.6	Polybutylenterephthalat	R432002369
1/8 NPT	Ø5/32	2 > 1	5904	Polybutylenterephthalat	R432002368
1/8 NPT	Ø1/4	2 > 1	5904	Polybutylenterephthalat	R432002370
1/8 NPT	Ø5/16	2 > 1	5904	Polybutylenterephthalat	R432002373
1/4 NPT	Ø1/4	2 > 1	9721.92	Polybutylenterephthalat	R432002371
1/4 NPT	Ø5/16	2 > 1	9721.92	Polybutylenterephthalat	R432002374
1/4 NPT	Ø 3/8	2 > 1	9721.92	Polybutylenterephthalat	R432002377
3/8 NPT	Ø1/4	2 > 1	33003.36	Polybutylenterephthalat	R432002372
3/8 NPT	Ø5/16	2 > 1	33003.36	Polybutylenterephthalat	R432002375
3/8 NPT	Ø 3/8	2 > 1	33003.36	Polybutylenterephthalat	R432002378
3/8 NPT	Ø1/2	2 > 1	33003.36	Polybutylenterephthalat	R432002380
1/2 NPT	Ø5/16	2 > 1	53844.48	Polybutylenterephthalat	R432002376
1/2 NPT	Ø 3/8	2 > 1	53844.48	Polybutylenterephthalat	R432002379
1/2 NPT	Ø1/2	2 > 1	53844.48	Polybutylenterephthalat	R432002381

Abmessungen in inch

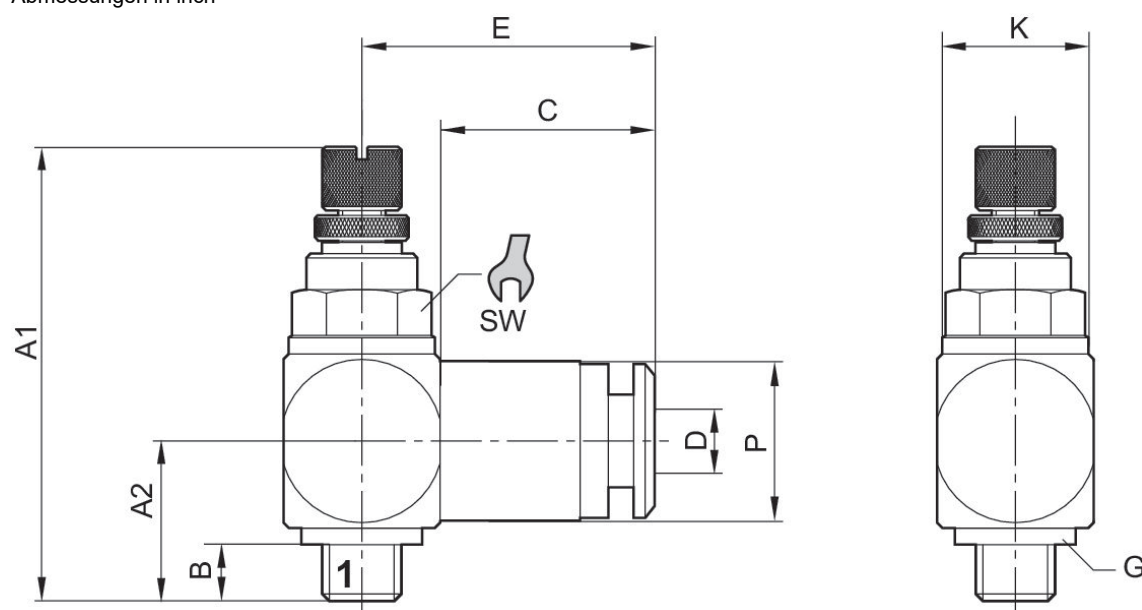


Drosseleinstellung über Rändelschraube

Abmessungen in inch

Material-nummer	Ø D	A1 (max)	A2	B	C	E	Ø K	SW	Ø P
R432002367	5/32	1,044	0,256	0,138	0,63	0,725	0,394	5/16	0,411
R432002369	1/4	1,852	0,591	0,493	0,67	0,839	0,394	5/16	0,489
R432002368	5/32	1,044	0,256	0,138	0,63	0,725	0,394	7/16	0,411
R432002370	1/4	1,418	0,473	0,276	0,67	0,855	0,567	7/16	0,489
R432002373	5/16	2,049	0,619	0,611	0,729	0,926	0,567	7/16	0,567
R432002371	1/4	1,635	0,493	0,394	0,67	0,938	0,725	9/16	0,489
R432002374	5/16	1,635	0,571	0,394	0,729	1,052	0,725	9/16	0,567
R432002377	3/8	1,852	0,69	0,493	0,827	1,202	0,725	9/16	0,693
R432002372	1/4	1,852	0,571	0,496	0,67	1,036	0,867	3/4	0,489
R432002375	5/16	1,852	0,63	0,496	0,729	1,068	0,867	3/4	0,567
R432002378	3/8	2,049	0,749	0,611	0,827	1,217	0,867	3/4	0,693
R432002380	1/2	2,049	0,749	0,496	0,887	1,371	0,867	3/4	0,835
R432002376	5/16	2,049	0,682	0,611	0,729	1,143	1,103	1	0,567
R432002379	3/8	2,049	0,749	0,611	0,827	1,292	1,103	1	0,693
R432002381	1/2	2,049	0,749	0,611	0,887	1,43	1,103	1	0,835


Drosselrückschlagventil, Serie QR1-DWA

Steckanschluss
Außengewinde



Druckluftanschluss 1	Druckluftanschluss 2	Drosselrichtung	Nenndurchfluss Qn 1 zu 2 [l/min]	Werkstoff Gehäuse	Materialnummer
1/4 NPT	Ø1/4	1 > 2	9721.92	Polybutylenterephthalat	R432000791
3/8 NPT	Ø 3/8	1 > 2	33003.36	Polybutylenterephthalat	R432000792
1/2 NPT	Ø1/2	1 > 2	53844.48	Polybutylenterephthalat	R432000793

Abmessungen in inch

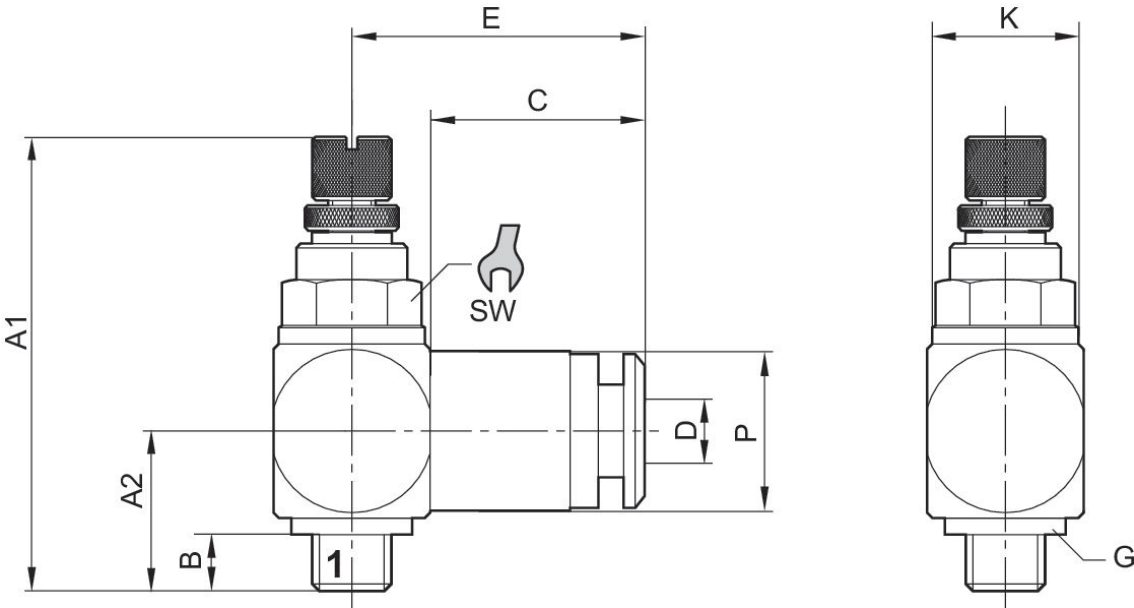


Drosseleinstellung über Rändelschraube

Abmessungen in inch

Materialnummer	G	Ø D	A1 (max)	A2	B	C	E	Ø K	SW	Ø P
R432000791	1/4 NPT	Ø1/4	1.635	0.493	0.394	0.7	0.938	0.725	9/16	0.489
R432000792	3/8 NPT	Ø3/8	2.049	0.749	0.611	0.8	1.217	0.867	3/4	0.693
R432000793	1/2 NPT	Ø1/2	2.049	0.749	0.611	0.9	1.430	1.103	1	0.835


Drosselrückschlagventil, Serie QR1-DWB

Steckanschluss
Außengewinde



Druckluftanschluss 1	Druckluftanschluss 2	Drosselrichtung	Neandurchfluss Qn 1 zu 2 [l/min]	Werkstoff Gehäuse	Materialnummer
10-32 UNF	Ø1/8	1 > 2	2607.6	Polybutylenterephthalat	R432002362
10-32 UNF	Ø5/32	1 > 2	2607.6	Polybutylenterephthalat	R432002363
1/8 NPT	Ø5/32	1 > 2	5904	Polybutylenterephthalat	R432002364
10-32 UNF	Ø1/4	1 > 2	2607.6	Polybutylenterephthalat	R432002365
1/8 NPT	Ø1/4	1 > 2	2607.6	Polybutylenterephthalat	R432002366

Abmessungen in inch

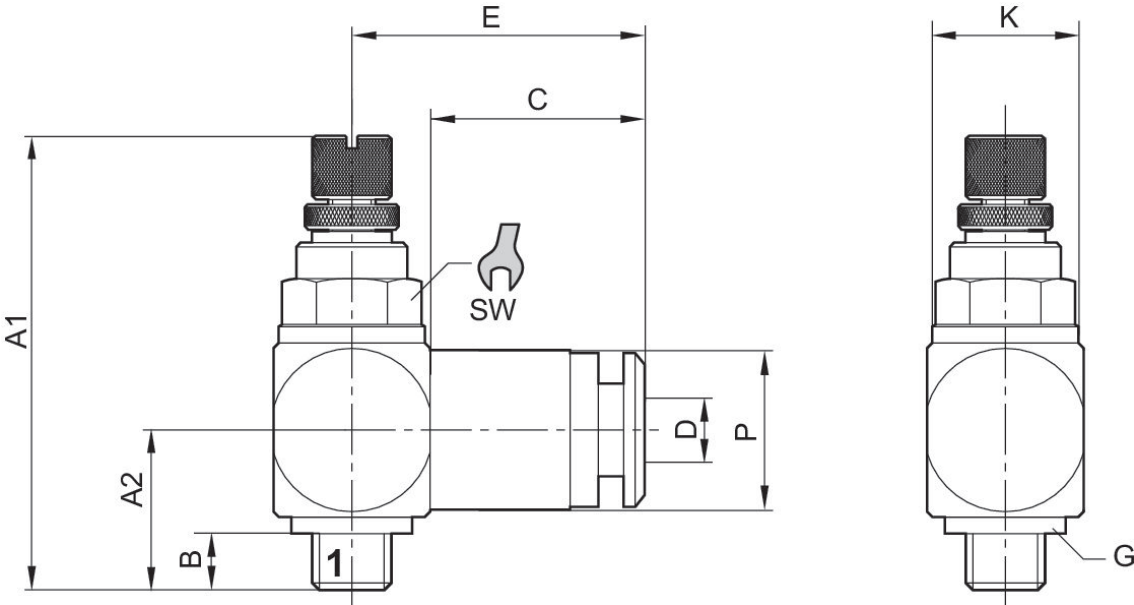

Drosseleinstellung über Rändelschraube

Abmessungen in inch

Materialnummer	G	Ø D	A1 (max)	A2	B	C	E	Ø K	SW	Ø P
R432002362	10-32 UNF	Ø1/8	1,044	0.272	0.158	0.355	0.552	0,394	5/16	0.256
R432002363	10-32 UNF	Ø5/32	1,044	0.252	0.158	0.461	0.617	0,394	5/16	0.315
R432002364	1/8 NPT	Ø5/32	1,418	0.441	0.315	0.461	0.701	0.552	7/16	0.315

Material- nummer	G	Ø D	A1 (max)	A2	B	C	E	Ø K	SW	Ø P
R432002365	10-32 UNF	Ø1/4	1,044	0.252	0.158	0.473	0.662	0,394	5/16	0.411
R432002366	1/8 NPT	Ø1/4	1,418	0.441	0.315	0.473	0.717	0.552	7/16	0.411

Efficient pneumatic solutions, our program:
cylinders and drives, valves and valve systems,
air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



EMERSON™

CONSIDER IT SOLVED™