

PE7



AVENTICS™



AVENTICS série PE7 Sensores
de pressão



Sensor pressostato, Série PE7

- tipo de construção compacto



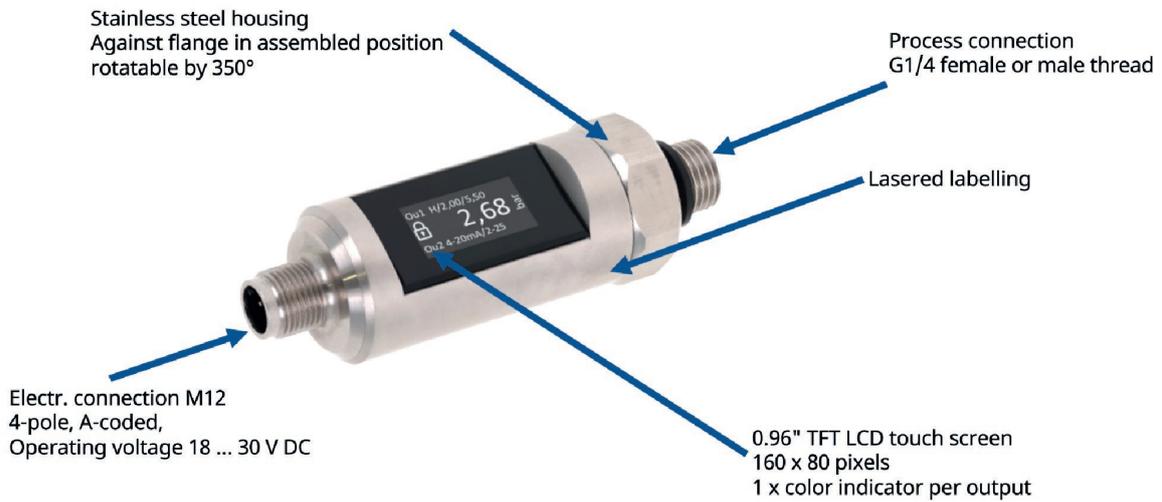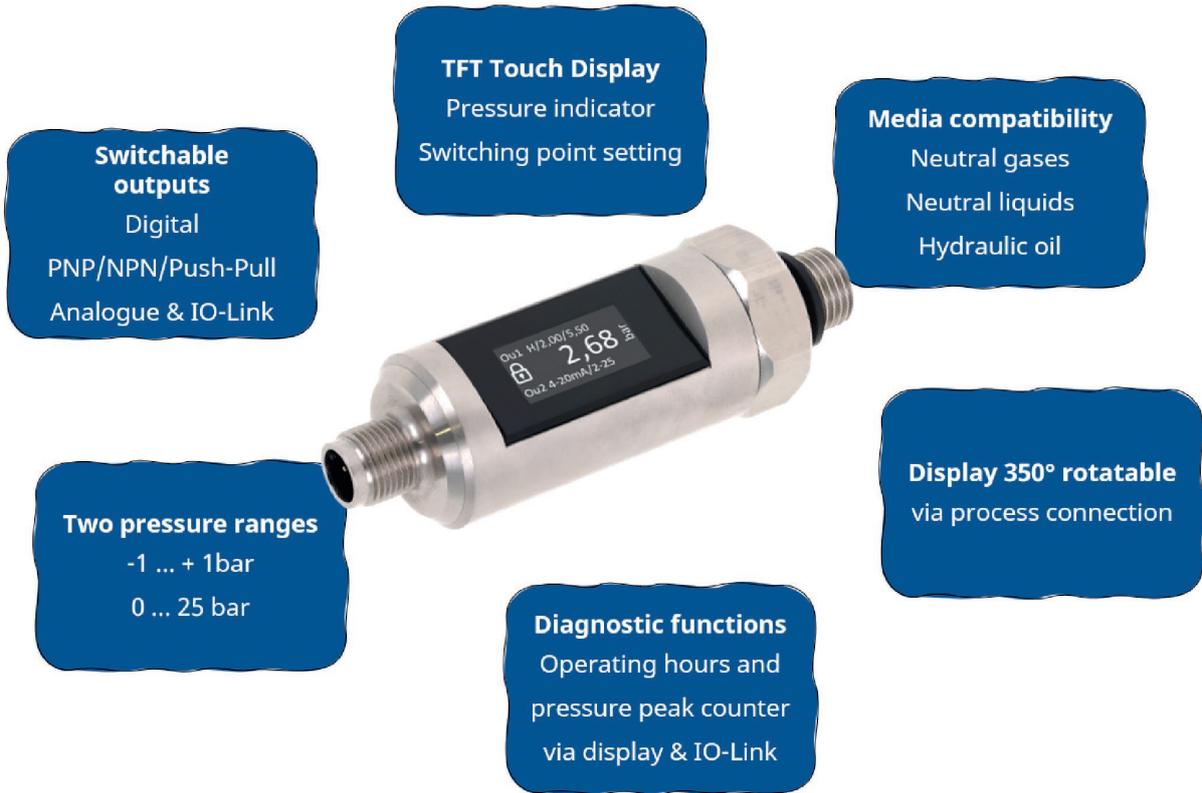


Sensor pressostato, Série PE7

Conector
M12x1
rosca externa
Declaração de conformidade CE
UKCA
RoHS
Conformidade com o REACH
UL (Underwriters Laboratories)
De 4 pinos



Conexão rosqueada	Pressão de comutação mín/máx [bar]	Pressão de comutação máx [bar]	Tensão de operação CC, mín. [V DC]	Tensão de operação CC, máx. [V DC]	Segurança de excesso de pressão	Sinal de saída digital	Histerese	N° de material
G 1/4	-1	1	18	30	10 bar	PNP, NPN, Push-pull, 1 x IO-Link, 0 - 10 V DC, 4 - 20 mA	regulável	R412028726
G 1/4	0	25	18	30	10 bar	PNP, NPN, Push-pull, 1 x IO-Link, 0 - 10 V DC, 4 - 20 mA	regulável	R412028728


Dimensões em mm

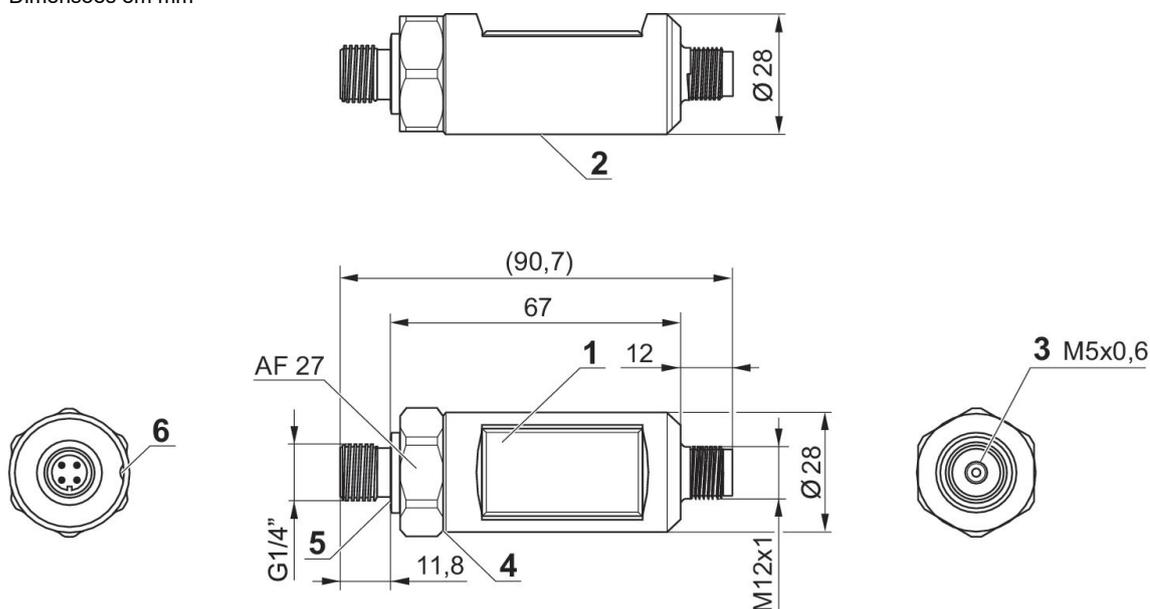

- 1) OLED
- 2) Inscrição a laser na parte inferior de acordo com as instruções de impressão
- 3) parafuso de estrangulamento
- 5) Vedação
- 6) 1) pressurização da caixa

R412028726, R412028728

Ocupação dos pinos



- 1) +UB
- 2) 0 VDC
- 3) OUT 1 / IO-L
- 4) OUT 2


Sensor pressostato, Série PE7

Conector
M12x1
Rosca interna
Declaração de conformidade CE
UKCA
RoHS
Conformidade com o REACH
UL (Underwriters Laboratories)
De 4 pinos



Conexão rosqueada	Pressão de comutação mín/máx [bar]	Pressão de comutação máx [bar]	Tensão de operação CC, mín. [V DC]	Tensão de operação CC, máx. [V DC]	Segurança de excesso de pressão	Sinal de saída digital	Histerese	N° de material
G 1/4	-1	1	18	30	10 bar	PNP, NPN, Push-pull, 1 x IO-Link, 0 - 10 V DC, 4 - 20 mA	regulável	R412028725
G 1/4	0	25	18	30	10 bar	PNP, NPN, Push-pull, 1 x IO-Link, 0 - 10 V DC, 4 - 20 mA	regulável	R412028727


Dimensões em mm

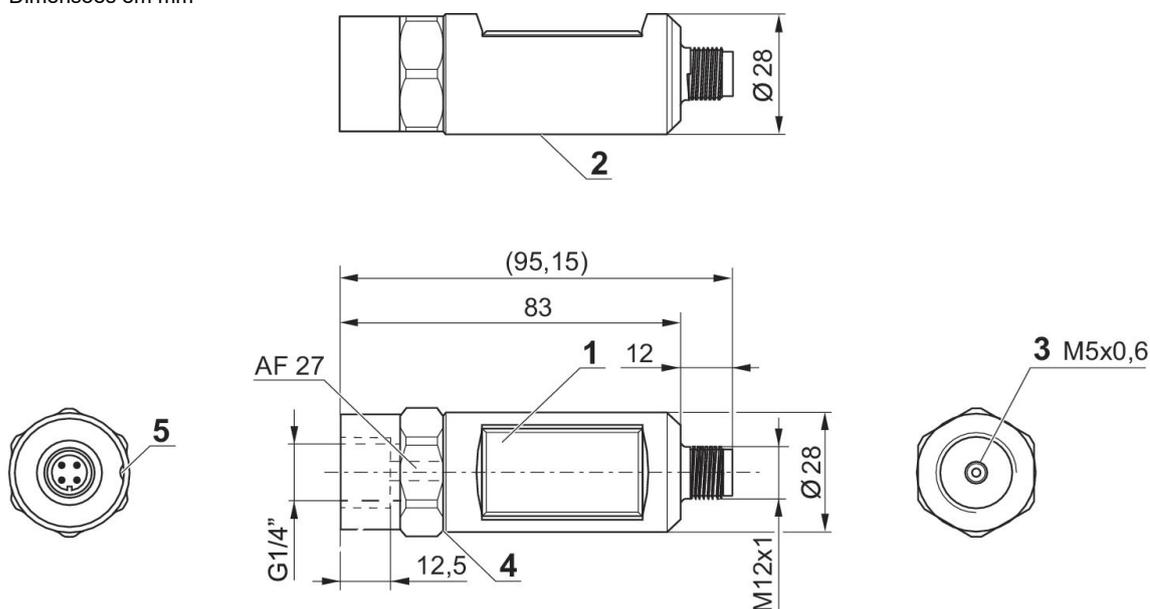

- 1) OLED
- 2) Inscrição a laser na parte inferior de acordo com as instruções de impressão
- 3) parafuso de estrangulamento
- 5) 1) pressurização da caixa

R412028725, R412028727

Ocupação dos pinos



- 1) +UB
- 2) 0 VDC
- 3) OUT 1 / IO-L
- 4) OUT 2

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



CONSIDER IT SOLVED™