

# 3/2-directional valve, Series DP22, Basic valve without coil, Pipe connection, KR, NO

3124A1113C9N4F1


Series  
DP22

2024-09-30

- Coil width 22 mm
- Plate connection

## Series DP22

The AVENTICS Series DP offer a simple, reliable and robust solution for all classical pilot control functions with direct electrical operation.



## Technical data

Industry	Industrial
Activation	Electrically
Valve type	Poppet valve
Switching principle	3/2, with spring return
Valve function	NC
Actuating control	Double Solenoid
Sealing principle	Soft seal
Manual override	with detent
Compressed air connection input	Plate connection
Compressed air connection output	Plate connection
Compressed air connection, exhaust	M5
Nominal flow Qn 1 to 2	50 l/min
Nominal flow Qn 2 to 3	85 l/min
Min. working pressure	0 bar
Max. working pressure	7 bar

# 3/2-directional valve, Series DP22, Basic valve without coil, Pipe connection, KR, NO

3124A1113C9N4F1

Series  
DP22

2024-09-30

Electrical connection type	Plug
Electrical connection size	Form B
Electrical connection number of poles	3-pin
Protection class with connection	IP65
Coil insulation class	Class F
Operational voltage	24 V DC
Operational voltage DC	24 V
Voltage tolerance DC	-10 % / +10 %

Coil width	22 mm
Pilot valve width	22 mm
Compatibility index	43
Power consumption DC	2.8 W

Duty cycle	100 %
Typ. switch-on time	9 ms
Typ. switch-off time	6.2 ms

Blocking principle	Single valve
Min. ambient temperature	-25 °C
Max. ambient temperature	60 °C
Min. medium temperature	-25 °C
Max. medium temperature	60 °C
Medium	Compressed air
Min. oil content of compressed air	0 mg/m <sup>3</sup>
Max. oil content of compressed air	5 mg/m <sup>3</sup>
Max. particle size	5 µm

Mounting screws	M3
Weight	0.09 kg

## Material

Housing material	Polyamide fiber-glass reinforced
Material Coil	Polyamide
Seal material	Ethylene acrylate copolymers

Part No.	3124A1113C9N4F1
----------	-----------------

# 3/2-directional valve, Series DP22, Basic valve without coil, Pipe connection, KR, NO

Series  
DP22

2024-09-30

3124A1113C9N4F1

## Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

## Dimensions

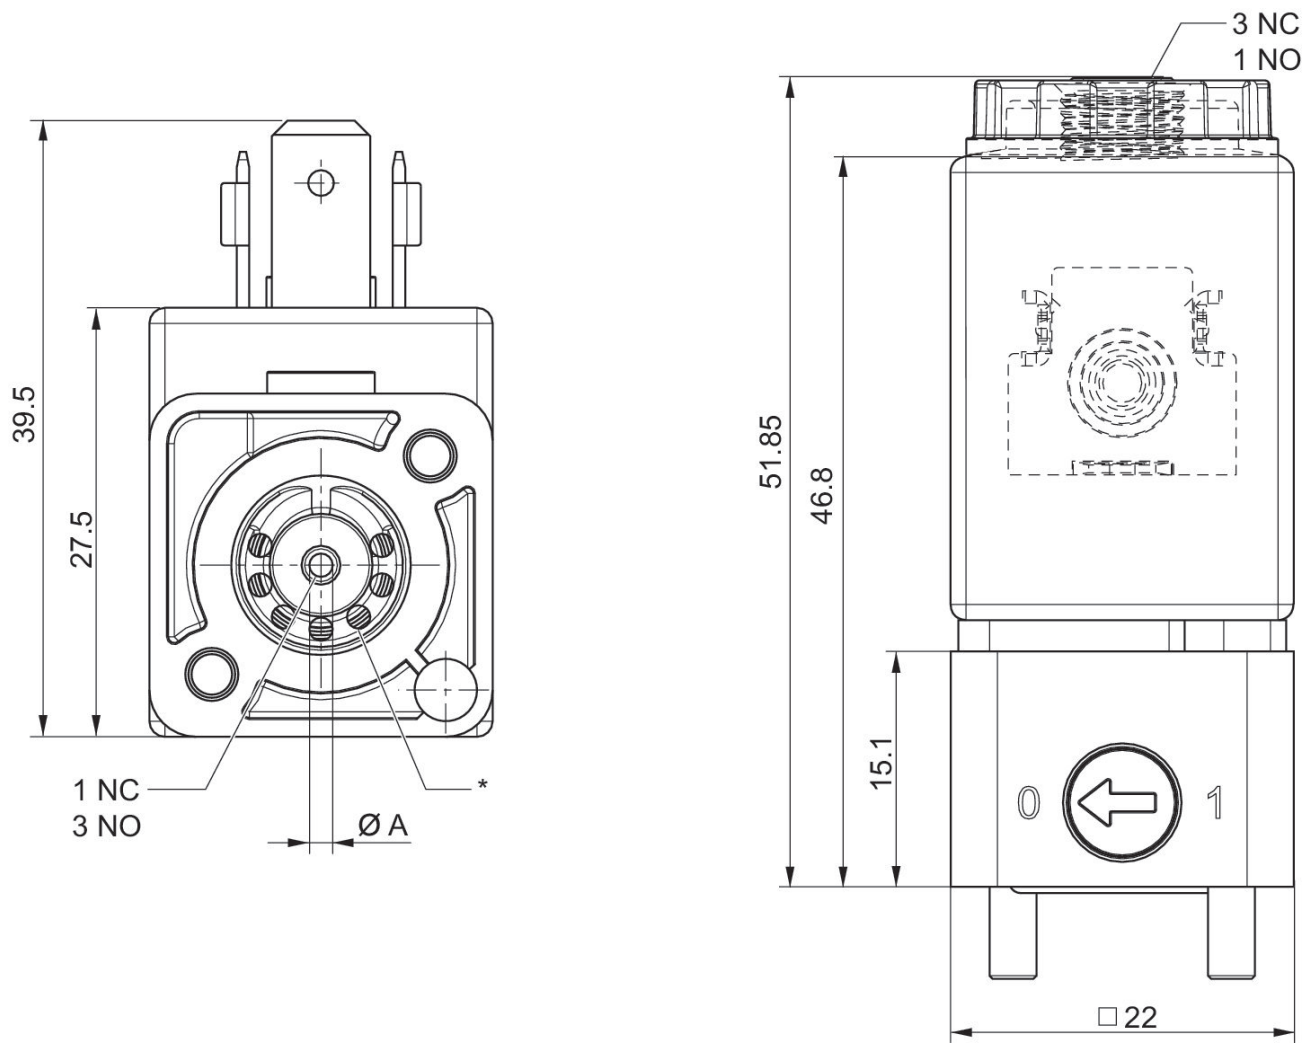

\* Port 2 (Output)