



AVENTICS Series 581 - Size 1 Standardized valves

The AVENTICS series 581 complies with the ISO 5599-1 valve standard. Due to the high degree of modularity, the series offers all valve functions, integrated throttle valves, various pilot coils and an extensive range of accessories.
Qn = 950 ... 1400 l/min

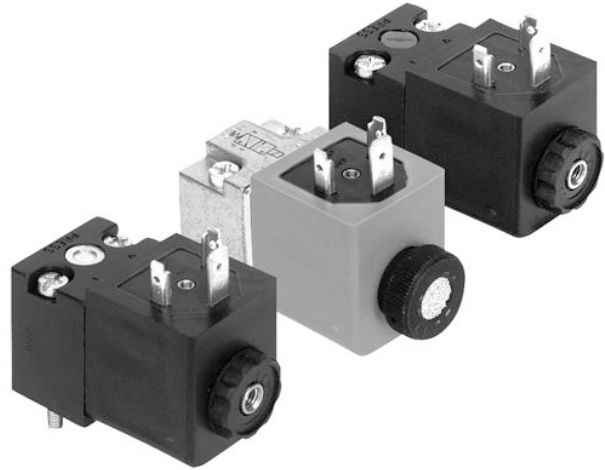

Technical data

Industry	Industrial
Activation	Electrically
Min. working pressure	0 bar
Max. working pressure	16 bar
Operational voltage AC at 50 Hz	230 V
Voltage tolerance AC 50 Hz	-20% / +10%
Standards	CNOMO / NFE 49-003-1
Pilot valve width	30 mm
Holding power AC 50 Hz	8 VA
Switch-on power AC 50 Hz	10 VA
Min. ambient temperature	-10 °C
Max. ambient temperature	50 °C
Medium	Compressed air
Protection class with connection	IP65
Duty cycle	100 %
Weight	0.162 kg
Part No.	5428150080

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

