



Technical data

Industry	Industrial
Type	Assembly kit
For series	551
Min. ambient temperature	-20 °C
Max. ambient temperature	70 °C
Min. medium temperature	-20 °C
Max. medium temperature	70 °C
Max. number of valve positions	9
Weight	0.23 kg

Material

Screws material	Steel, chrome-plated
Material tie-rod	Steel, chrome-plated
Material mounting bracket	Aluminum
Part No.	5514400090


Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

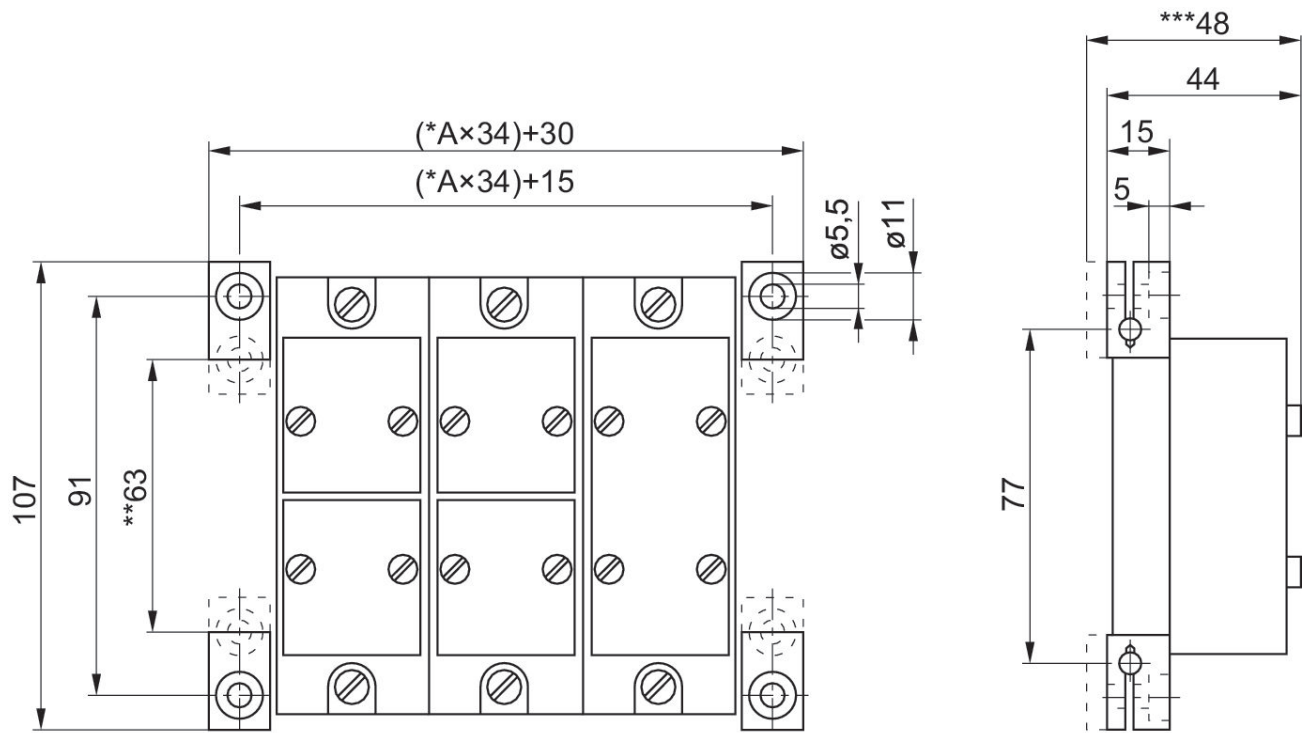

* A = No. of subbases. ** With the mounting holes turned inwards. *** With the mountings turned 180°.