

Subbase for two valves

5514410000

Logic valves

2024-08-15



Technical data

Industry	Industrial
Type	Base plate
For series	551
Direction of pneumatic port (1)	Down
Compressed air connection input	G 1/8
Direction of pneumatic port (2,4)	Down
Compressed air connection output	G 1/8
Direction of pneumatic port (3,5)	Down
Port exhaust	G 1/8
Min. working pressure	0 bar
Max. working pressure	10 bar
Min. ambient temperature	-20 °C
Max. ambient temperature	70 °C
Min. medium temperature	-20 °C
Max. medium temperature	70 °C
Medium	Compressed air
Max. number of valve positions	2
Weight	0.072 kg

Material

Material base plate	Die-cast aluminum
Surface base plate	black painted
Part No.	5514410000


Subbase for two valves

5514410000

Logic valves

2024-08-15

Fig. 2

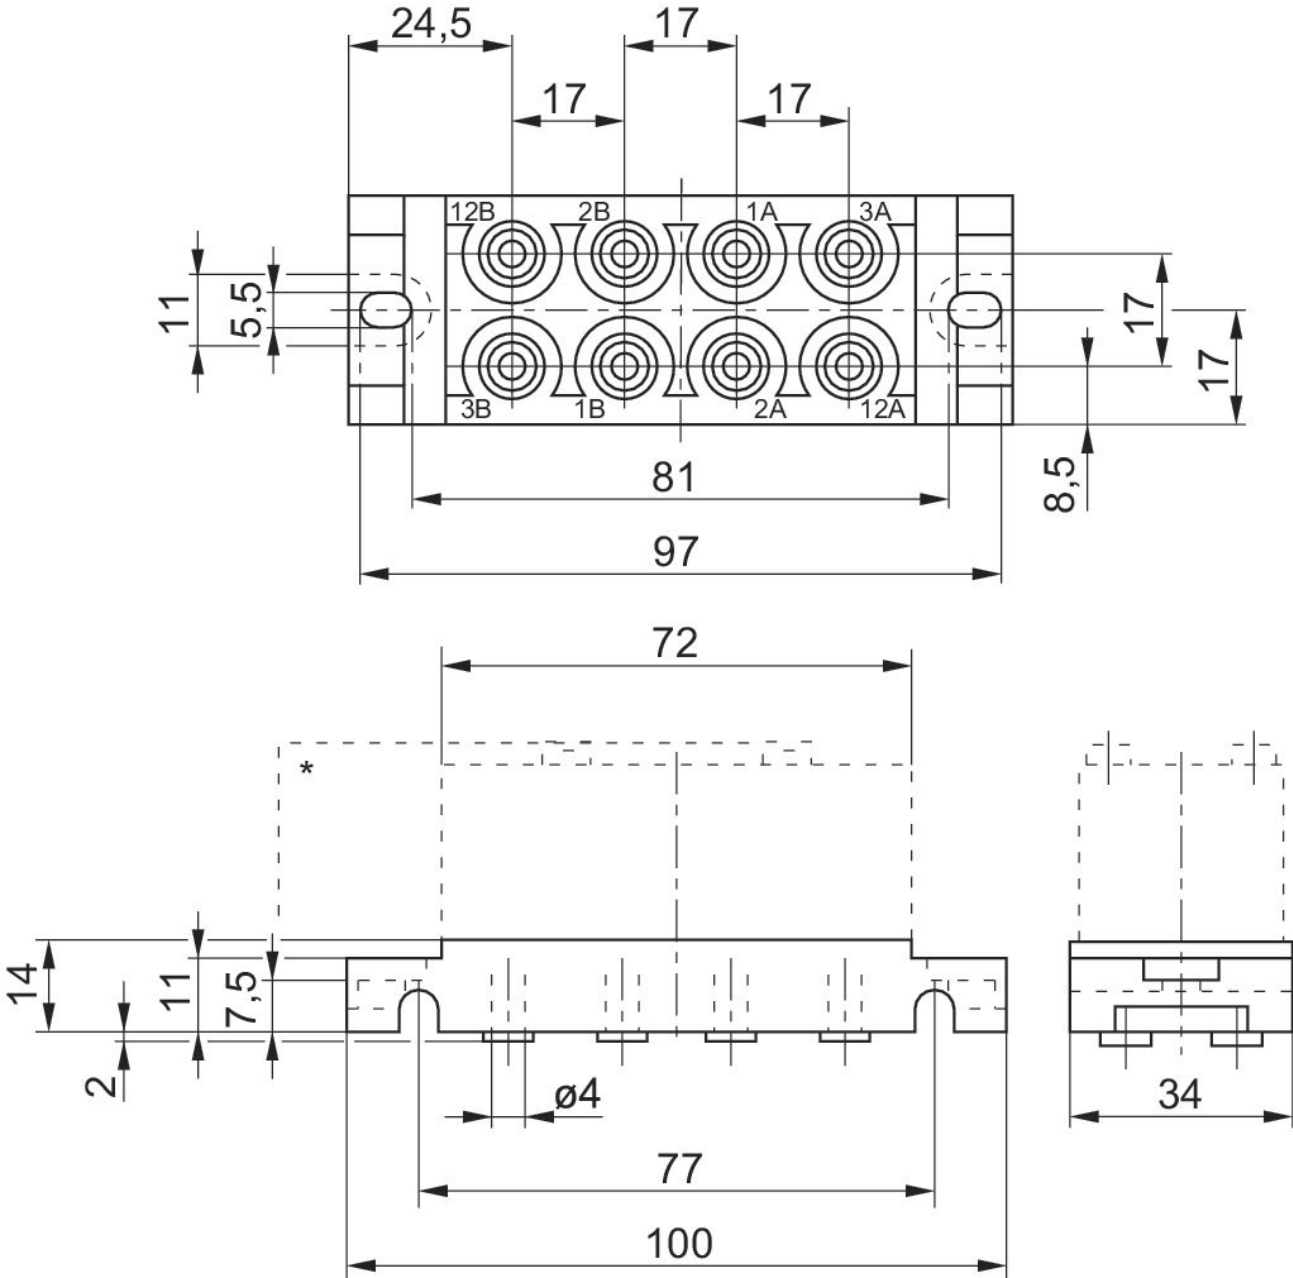

Subbase for two valves

5514410000

Logic valves

2024-08-15

Fig. 1

