
AVENTICS Series 563/565/567 Directional valves

The AVENTICS Series 563/565/567 have an aluminium housing, and are suited for assembly on single or manifold subbases and offer flow rate performances of up to 13620 l/min with a working pressure of up to 30 bar.





Technical data

Industry Industrial
Activation Electrically
Valve type Poppet valve

Switching principle 3/2, with spring return

Valve function NO/NC

Connection type Plate connection

Manual override with detent

Compressed air connection input G 1/4

Nominal flow Qn 1350 I/min

Min. working pressure3.5 barMax. working pressure10 barMin. control pressure3.5 barMax. control pressure10 bar

Electrical connection type Plug

Electrical connection size Form B, industry

3/2-directional valve, Series 563

2023-11-13

5633011330

Protection class with connection IP65
Operational voltage 24 V AC
Operational voltage AC at 50 Hz 24 V

Voltage tolerance AC 50 Hz -10% / +10%

Pilot External

Internal

Holding power AC 50 Hz 8 VA Switch-on power AC 50 Hz 10 VA

Duty cycle 100 %

Min. ambient temperature -20 °C

Max. ambient temperature 50 °C

Min. medium temperature -20 °C

Max. medium temperature 50 °C

Medium Compressed air

Min. oil content of compressed air 0 mg/m^3 Max. oil content of compressed air 5 mg/m^3 Max. particle size $5 \mu \text{m}$

Weight 0.38 kg

Material

Housing material Aluminum

Seal material Acrylonitrile butadiene rubber

Part No. 5633011330

Technical information

Min./max. operating pressure for external pilot: -[[1] bar]/[[10] bar]

The valves can be energized via the port closed with a plug on the front side of the cover.


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in https://www.emerson.com/en-us/support).

Dimensions

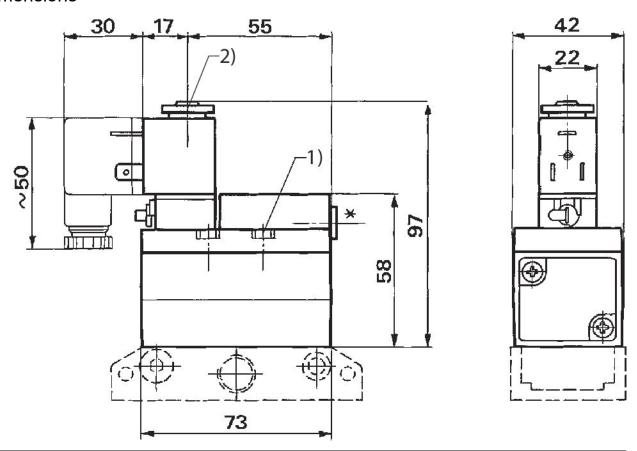

Tightening torque for mounting screws: 2.7 ± 0.3 Nm
 Tightening torque for lock nut: 1 ± 0.2 Nm
 Base plate not included in the scope of delivery
 Plugged port G 1/8 for external pilot