


# 5/2-directional valve, Series CD04

2023-09-07

5634200100

## Series CD04

Qn = 900l/min



## Technical data

Industry	Industrial
Activation	Mechanical
Valve type	Spool valve, positive overlapping
Actuating control	Single Solenoid
Plate connection	Pipe connection
Actuating element	Plunger
Sealing principle	soft seal
Lock type	not lockable
Compressed air connection type	Internal thread
Compressed air connection input	G 1/8
Compressed air connection output	G 1/8
Compressed air connection, exhaust	G 1/8
Nominal flow Qn	900 l/min
Working pressure min.	-0.95 bar
Working pressure max	10 bar
actuating force min.	70 N
Min. ambient temperature	-20 °C
Max. ambient temperature	65 °C

# 5/2-directional valve, Series CD04

2023-09-07

5634200100

---

Min. medium temperature	-20 °C
Max. medium temperature	65 °C
Medium	Compressed air
Oil content of compressed air min.	0 mg/m <sup>3</sup>
Oil content of compressed air max.	1 mg/m <sup>3</sup>
Max. particle size	50 µm

Weight 0.3 kg

## Material

Housing material	Die cast zinc Polyamide fiber-glass reinforced
Seal material	Acrylonitrile butadiene rubber
Material actuating control	Stainless Steel
Part No.	5634200100

## Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).


## Dimensions

# 5/2-directional valve, Series CD04

2023-09-07

5634200100

Fig. 1

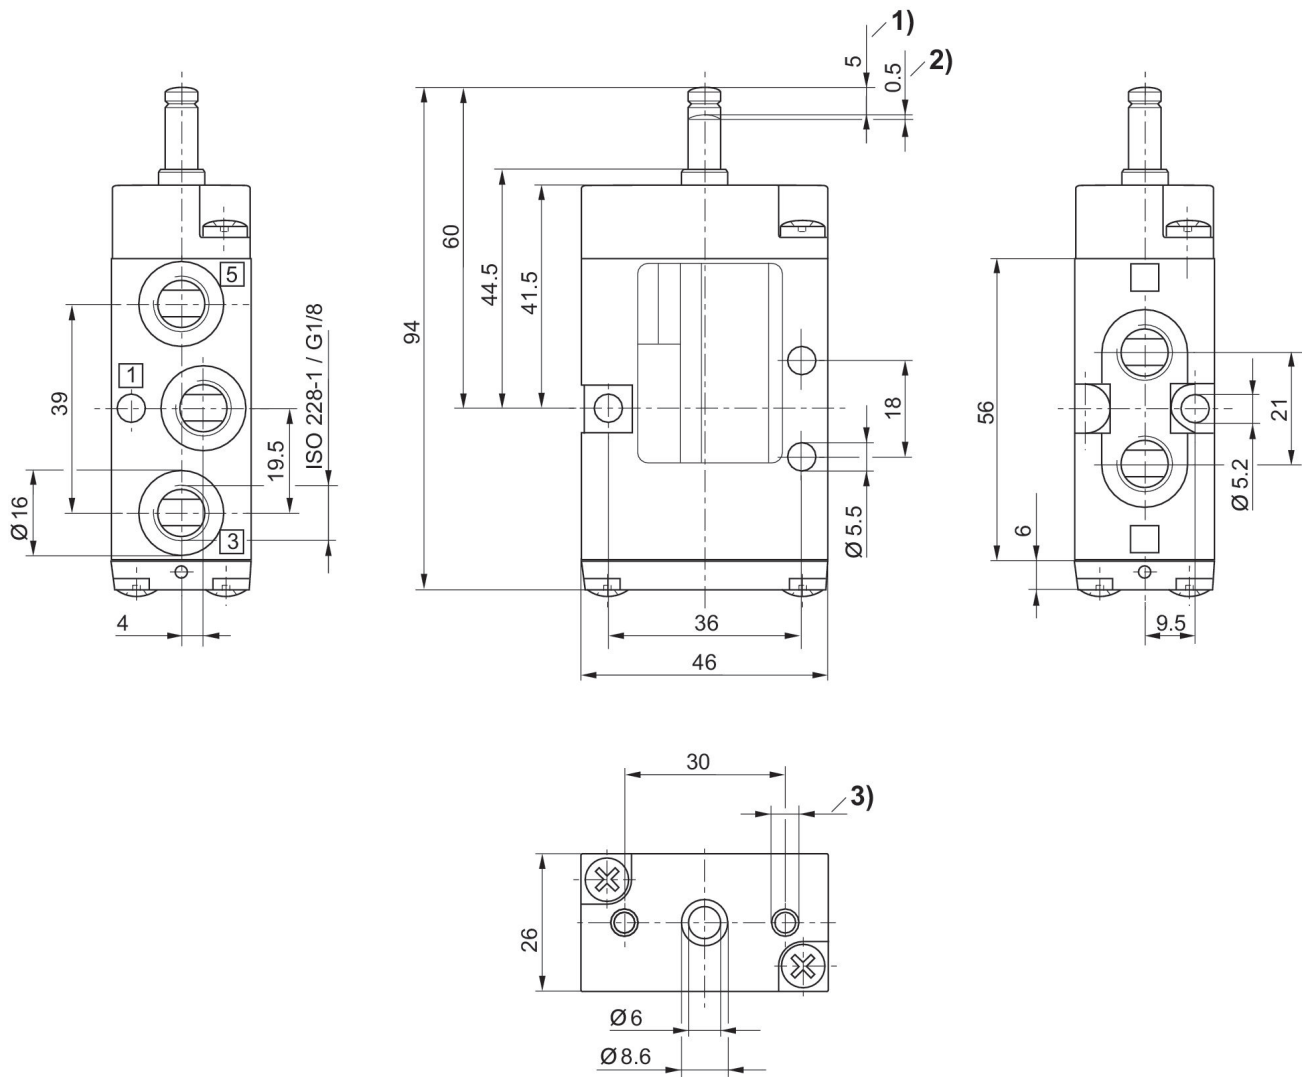

1) Stroke 2) Overstroke 3)  $\varnothing 4.5$  - 12 mm deep