

5/2-directional valve, Series CD12, single solenoid


5725405270

CD12

2025-12-10

AVENTICS Series CD12 Directional valves

The AVENTICS Series CD consists of various spool valves with an extremely durable die-cast zinc housing. Its electrical, pneumatic, or mechanical actuating controls (roller, lever, pedal, or plunger) make the Series CD ideal for applications in harsh environments.



Technical data

Industry

Industrial

Activation

Electrically

Valve type

Spool valve, positive overlapping

Switching principle

5/2, with air spring return

Sealing principle

Soft seal

Connection type

Pipe connection

Compressed air connection type

Internal thread

Compressed air connection input

M22x1,5

Compressed air connection output

M22x1,5

Compressed air connection, exhaust

M22x1,5

Pilot control exhaust

with directional pilot air exhaust

Compressed air connection pilot exhaust

M5

Nominal flow Qn

4100 l/min

Min. working pressure

2 bar

Max. working pressure

10 bar

Min. control pressure

2 bar

5/2-directional valve, Series CD12, single solenoid

5725405270

CD12

2025-12-10

Max. control pressure	10 bar
Electrical connection type	Plug
Electrical connection size	EN 175301-803, form A
Electrical connection number of poles	3-pin
Protection class with connection	IP65
Reverse polarity protection	Protected against polarity reversal
Operational voltage AC at 50 Hz	110 V
Voltage tolerance AC 50 Hz	-20 % / +10 %
Operational voltage AC at 60 Hz	110 V
Voltage tolerance AC 60 Hz	-10 % / +20 %
Pilot	Internal
Coil width	30 mm
Pilot valve width	30 mm
Compatibility index	52
Holding power AC 50 Hz	4.3 VA
Holding power AC 60 Hz	3.3 VA
Switch-on power AC 50 Hz	6.8 VA
Switch-on power AC 60 Hz	5.7 VA
Duty cycle	100 %
Typ. switch-on time	37 ms
Typ. switch-off time	97 ms
Temperature resistance	-25 °C cold-resistant
Min. ambient temperature	-25 °C
Max. ambient temperature	50 °C
Min. medium temperature	-25 °C
Max. medium temperature	50 °C
Medium	Compressed air
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	1 mg/m ³
Max. particle size	50 µm
Weight	0.99 kg
Material	
Housing material	Aluminum

5/2-directional valve, Series CD12, single solenoid

5725405270

CD12

2025-12-10

Seal material	Polyamide, fiber-glass reinforced Acrylonitrile butadiene rubber Polyurethane
---------------	---

Part No.	5725405270
----------	------------

Technical information

*Note: Basic valves feature a maximum working pressure of 16 bar. When combined with standard CNOMO pilots, the maximum working pressure is 10 bar.

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).


5/2-directional valve, Series CD12, single solenoid

5725405270

CD12

2025-12-10

Dimensions

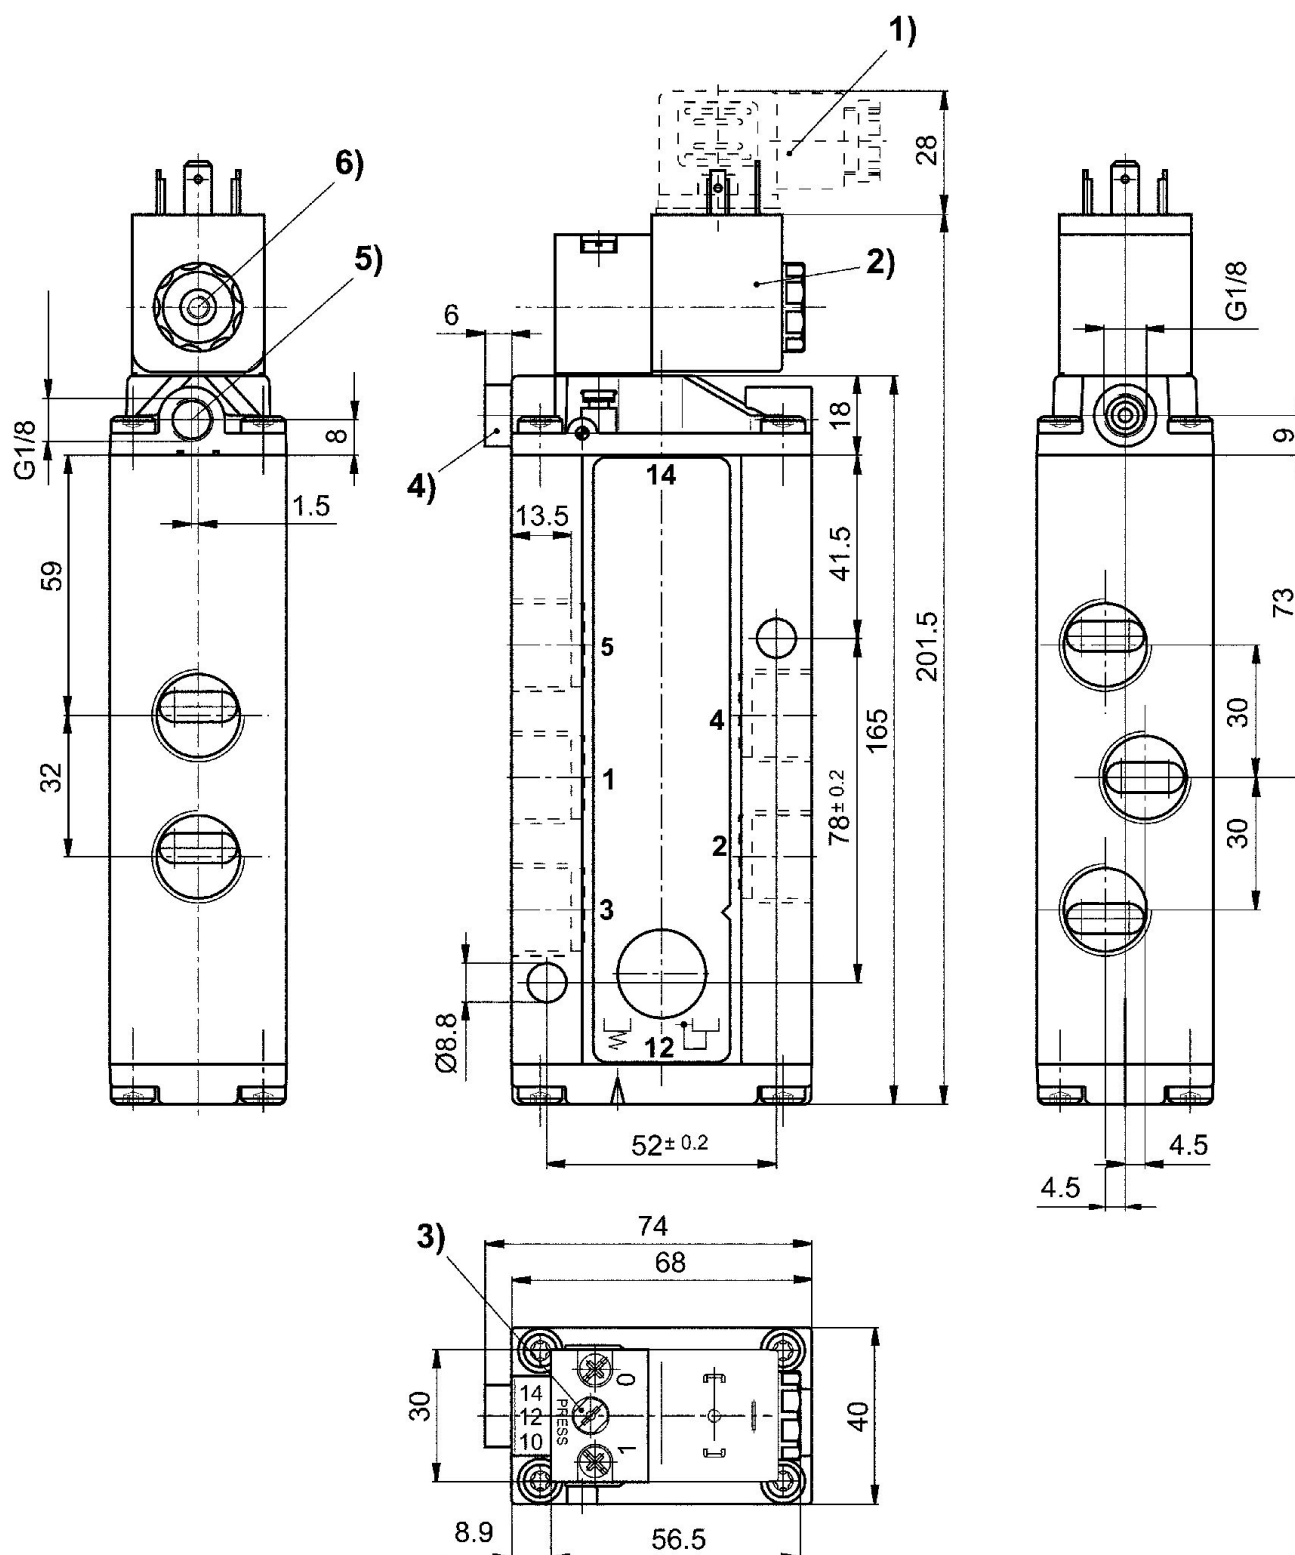

- 1) Valve plug connector 2) Coil can be rotated at 90° intervals 3) Manual override
4) Port X (only for externally piloted valves) 5) Exhaust port of piston 6) Pilot valve exhaust, M5