



AVENTICS Series CD01-PA Standardized valve systems (ISO 15407-1)

The AVENTICS Series CD01-PA is the flexible valve system according to ISO 15407-1. The Series offers pneumatic or electrical control, vacuum or pressure of up to 16 bar, dual-pressure application, pressure-zones, ATEX certification, and various accessories allow for a wide range of modularity.

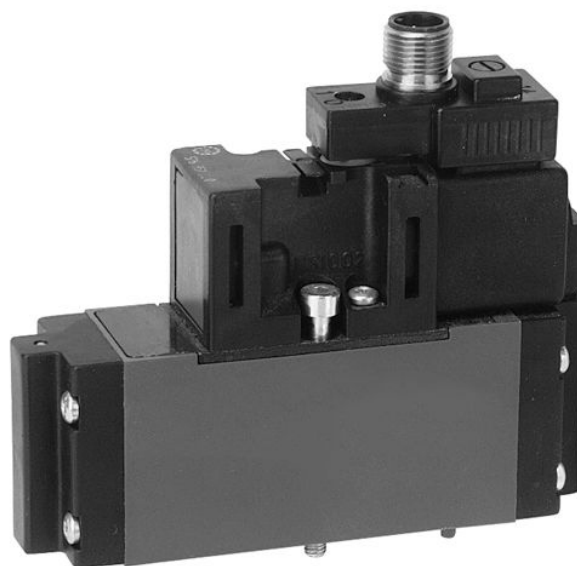

Technical data

Industry

Activation

Nominal flow Q_n

Compressed air connection output

Min. working pressure

Max. working pressure

Operational voltage

Operational voltage DC

Voltage tolerance DC

Manual override

Electrical connection type

Electrical connection size

Electrical connection number of poles

Actuating control

Sealing principle

Pilot

Certificates

Standards

Pilot valve width

Industrial

Electrically

1010 l/min

base plate DIN ISO 15407-1

0 bar

16 bar

24 V DC

24 V

-10% / +10%

without detent

Plug

M12x1

4-pin

Single Solenoid

Soft seal

External

Free of substances that impair surface wetting in the coating process

ISO 15407-1

26 mm

5/2-directional valve, Series CD01-PA

2023-12-13

5763600720

Valve type	Spool valve, positive overlapping
Connection type	Plate connection
Return	with spring/air spring return
Compressed air connection input	base plate DIN ISO 15407-1
Compressed air connection, exhaust	base plate DIN ISO 15407-1
Compressed air connection pilot input	base plate DIN ISO 15407-1
Compressed air connection pilot exhaust	base plate DIN ISO 15407-1
Power consumption DC	1.6 W
Frame size	26 mm
Max. control pressure	10 bar
Min. ambient temperature	-15 °C
Max. ambient temperature	50 °C
Min. medium temperature	-15 °C
Max. medium temperature	50 °C
Medium	Compressed air
Max. particle size	50 µm
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	5 mg/m ³
Standard compressed air connection	according to ISO 15407-1
Nominal flow Q _n 1 to 2	1010 l/min
Nominal flow Q _n 2 to 3	1010 l/min
Protection class with connection	IP65
Protective circuit	43 V bi-directional
LED status display	Yellow
Duty cycle	100 %
Typ. switch-on time	34 ms
Typ. switch-off time	35 ms
Mounting screws	M4 with hexagon socket
Mounting screw tightening torque	2.5 Nm
Weight	0.23 kg
Housing material	Polyamide Polyoxymethylene
Seal material	Acrylonitrile butadiene rubber
Part No.	5763600720

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

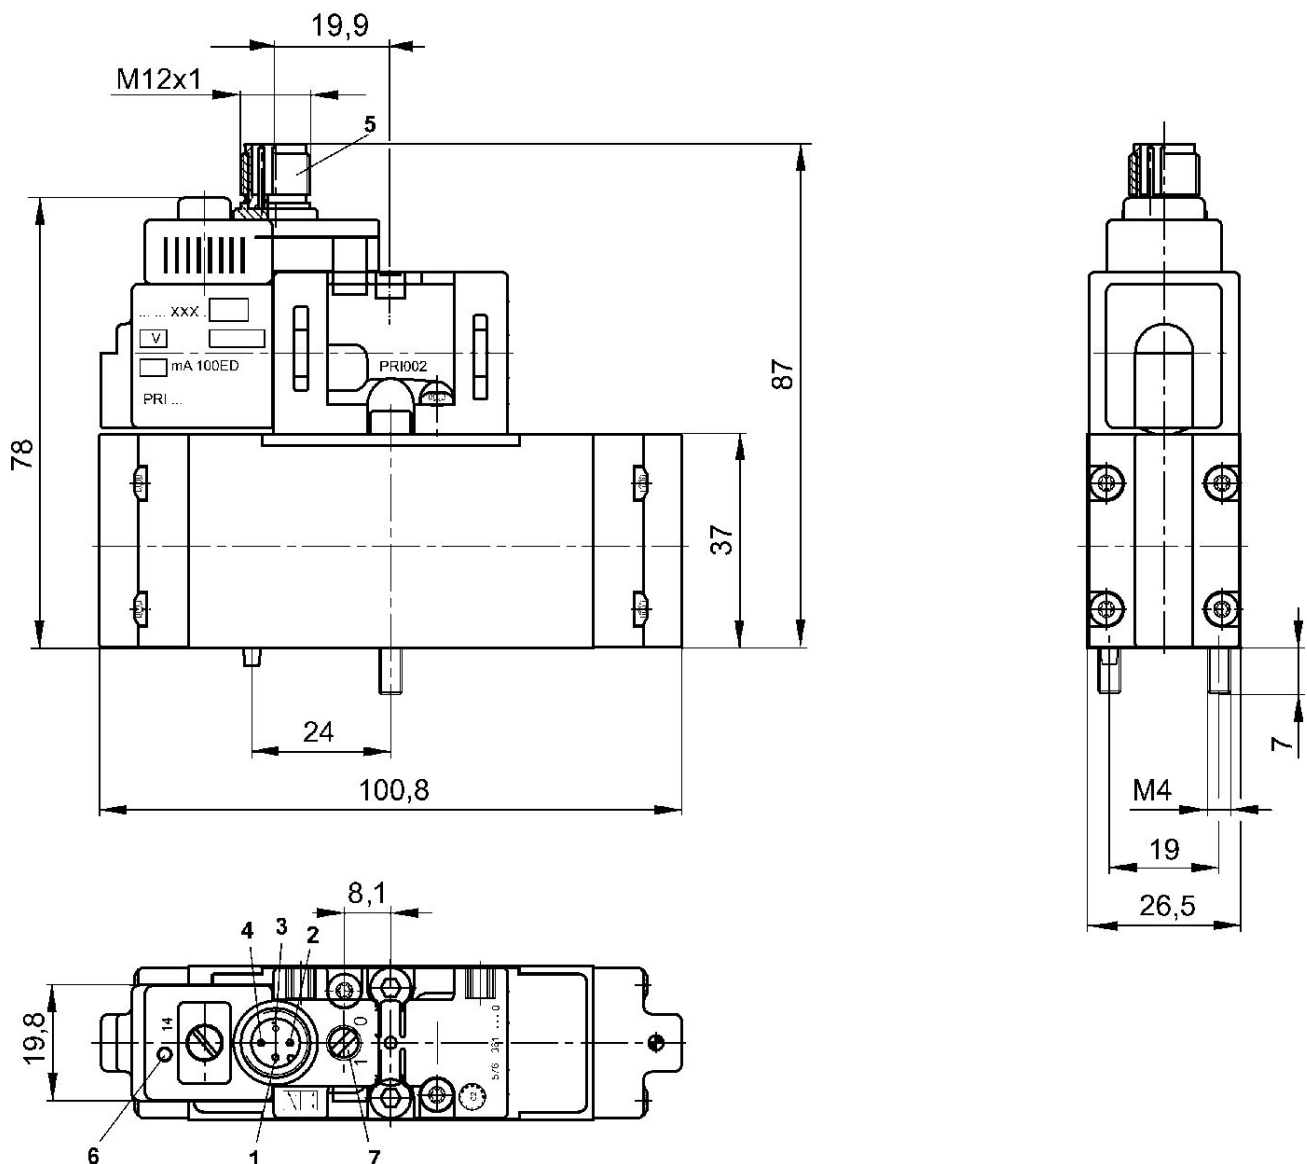

1) not assigned 2) not assigned 12 3) 0 V 4) magnet 14 5) metal round plug M12x1 6) yellow valve switching state LED 7) manual override

Minimum control pressure for
externally piloted valves (depending
on the working pressure)

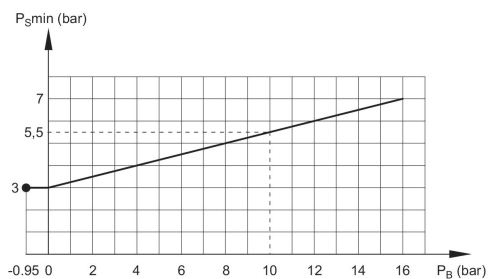

P_B = Working pressure

P_S = control pressure