

5/2-directional valve, Series CD07, single solenoid, G1/4, -25 °C cold-resistant, Namur

5776605302

CD07


2025-10-23

AVENTICS Series CD07 Directional valves

The AVENTICS Series CD consists of various spool valves with an extremely durable die-cast zinc housing. Its electrical, pneumatic, or mechanical actuating controls (roller, lever, pedal, or plunger) make the Series CD ideal for applications in harsh environments.

For demanding environments

- Durable design
- Assembly on base plate
- Suitable for extreme ambient temperatures
- ATEX version available



Technical data

Industry

Activation

Note

Frame size

Valve type

Basic valve equipment

Switching principle

Actuating control

Sealing principle

Connection type

Manual override

Industrial

Electrically operated

Valves with Namur port as per VDI/VDE3845

CD07

Spool valve, positive overlapping

Basic valve without coil

5/2, with spring return

Single Solenoid

Soft seal

Pipe connection

with detent

Compressed air connection

Compressed air connection type

Standard compressed air connection

Compressed air connection input

Compressed air connection output

Compressed air connection, exhaust

G 1/4

Base plate connection

Internal thread

according to ISO 228-1

G 1/4

Namur base plate

G 1/4

5/2-directional valve, Series CD07, single solenoid, G1/4, -25 °C cold-resistant, Namur

CD07

5776605302

2025-10-23

Pilot control exhaust	with directional pilot air exhaust
Compressed air connection pilot exhaust	M5
Nominal flow Qn	1200 l/min
Nominal flow Qn 1 to 2	1200 l/min
Nominal flow Qn 2 to 3	1200 l/min
Min. working pressure	3 bar
Max. working pressure	10 bar
Min. control pressure	3 bar
Max. control pressure	10 bar
Electrical connection type	Plug
Electrical connection size	EN 175301-803, form A
Electrical connection number of poles	3-pin
Connector standard	EN 175301-803:2006
Reverse polarity protection	Protected against polarity reversal
Pilot	Internal
Pilot valve width	30 mm
Compatibility index	13 14
Duty cycle	100 %
Temperature resistance	-25 °C cold-resistant
Standards	NAMUR
Certificates	ATEX optional
ATEX	ATEX optional
Min. ambient temperature	-25 °C
Max. ambient temperature	50 °C
Min. medium temperature	-25 °C
Max. medium temperature	50 °C
Medium	Compressed air
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	1 mg/m ³
Max. particle size	50 µm

5/2-directional valve, Series CD07, single solenoid, G1/4, -25 °C cold-resistant, Namur

5776605302

CD07

2025-10-23

Material

Housing material

Polyamide, fiber-glass reinforced

Die cast zinc

Seal material

Acrylonitrile butadiene rubber

Part No.

5776605302

Technical information

Nominal flow Q_n at 6 bar and $\Delta p = 1$ bar

ATEX optional: ATEX version can be produced by combining the basic valve without coil with an ATEX coil. ATEX ID: see ATEX coils catalog page.

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).


5/2-directional valve, Series CD07, single solenoid, G1/4, -25 °C cold-resistant, Namur

5776605302

CD07

2025-10-23

Dimensions in mm

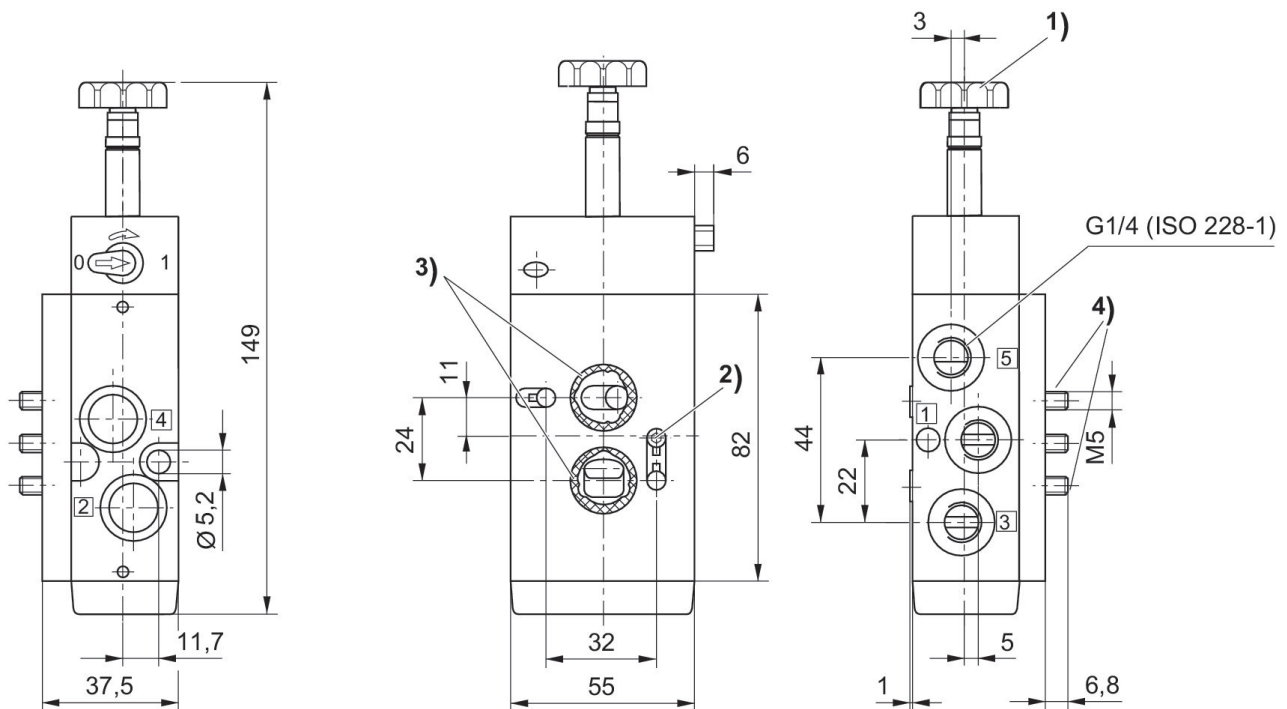

- 1) After removal of cap M 5 internal thread
- 2) Threaded pins DIN 914 M5 x 20
- 3) O-ring 16 x 2 (included in scope of delivery)
- 4) cylinder screw M5x40 (included in scope of delivery)