

Cilindro a tiranti, CNOMO NFE 49-001, Serie C12P

7472406567

Informazioni sul prodotto

Cilindri a tiranti AVENTICS serie C12P

- La serie C12P AVENTICS è costituita da un cilindro conforme alla norma CNOMO NFE 49-001 ed è dotato di ricambio per applicazioni esistenti.



Dati tecnici

Settore	Industria
Norme	CNOMO / NFE 49-001
Ø pistone	160 mm
Corsa	400 mm
Raccordi	G 3/4
Principio attivo	a doppio effetto
Ammortizzamento	ammortizzamento a regolazione pneumatica
Pistone magnetico	Pistone con magnete
Requisiti ambientali	Standard industriale
Asta pistone	unilaterale
Raschia-asta	Raschia-asta industriale standard
Pressione per determinare le forze del pistone	6,3 bar

Forza del pistone in entrata	11875 N
Forza del pistone in uscita	12667 N
Temperatura ambiente min.	-20 °C
Temperatura ambiente max.	80 °C
Pressione di esercizio min.	2 bar
Pressione di esercizio max	10 bar
Filettatura asta pistone	M36x2
Peso corsa da 0 mm	11.6 kg
Peso corsa da +10 mm	0.352 kg
Corsa max.	2600 mm
Fluido	Aria compressa
Temperatura del fluido min.	-20 °C
Temperatura del fluido max.	80 °C
Dimensione max. particella	50 µm
Contenuto di olio dell'aria compressa min.	0 mg/m ³
Contenuto di olio dell'aria compressa max.	5 mg/m ³

Materiale

Asta pistone	Acciaio inox
Materiale tiranti	Acciaio inox
Materiale guarnizioni	Poliuretano
Materiale coperchio anteriore	Alluminio
Canna del cilindro	Alluminio
Coperchio terminale	Alluminio
Dado per asta pistone	Acciaio, cromato
Codice	7472406567

Informazioni tecniche

Nel Media Centre sono riportati i codici di ordinazione e tutte le configurazioni valide (informazioni per i clienti).

Il punto di rugiada in pressione deve essere inferiore alla temperatura ambiente e a quella del fluido di almeno 15 °C e non superare il valore di 3 °C .

Il contenuto di olio dell'aria compressa deve rimanere costante per tutta la durata.

Utilizzare esclusivamente oli omologati da AVENTICS. Per maggiori informazioni consultare il documento "Informazioni tecniche" (disponibile nel <https://www.emerson.com/en-us/support>).

Technical drawing of a 4-way ball valve assembly, showing side and end views with dimensions.

Side View Dimensions:

- $\varnothing B$: Overall diameter of the valve body.
- $\varnothing MM$: Diameter of the mounting flange.
- $\varnothing KK$: Diameter of the mounting flange.
- $\varnothing EE$: Diameter of the ball.
- $\varnothing DD$: Diameter of the ball.
- $\varnothing FF$: Diameter of the ball.
- $\varnothing GG$: Diameter of the ball.
- $\varnothing HH$: Diameter of the ball.
- $\varnothing II$: Diameter of the ball.
- $\varnothing JJ$: Diameter of the ball.
- $\varnothing KK$: Diameter of the ball.
- $\varnothing LL$: Diameter of the ball.
- $\varnothing MM$: Diameter of the ball.
- $\varnothing NN$: Diameter of the ball.
- $\varnothing OO$: Diameter of the ball.
- $\varnothing PP$: Diameter of the ball.
- $\varnothing QQ$: Diameter of the ball.
- $\varnothing RR$: Diameter of the ball.
- $\varnothing SS$: Diameter of the ball.
- $\varnothing TT$: Diameter of the ball.
- $\varnothing UU$: Diameter of the ball.
- $\varnothing VV$: Diameter of the ball.
- $\varnothing WW$: Diameter of the ball.
- $\varnothing XX$: Diameter of the ball.
- $\varnothing YY$: Diameter of the ball.
- $\varnothing ZZ$: Diameter of the ball.

End View Dimensions:

- E : Overall width of the valve body.
- TG : Width of the mounting flange.
- Y : Distance from the mounting flange to the ball.
- WH : Distance from the mounting flange to the ball.
- VD : Distance from the mounting flange to the ball.
- AM : Distance from the mounting flange to the ball.
- KW : Distance from the mounting flange to the ball.
- KV : Distance from the mounting flange to the ball.
- SW : Distance from the mounting flange to the ball.
- BB : Distance from the mounting flange to the ball.
- K : Distance from the mounting flange to the ball.
- Y : Distance from the mounting flange to the ball.
- WH : Distance from the mounting flange to the ball.
- VD : Distance from the mounting flange to the ball.
- AM : Distance from the mounting flange to the ball.
- KW : Distance from the mounting flange to the ball.
- KV : Distance from the mounting flange to the ball.
- SW : Distance from the mounting flange to the ball.
- BB : Distance from the mounting flange to the ball.
- K : Distance from the mounting flange to the ball.

Other Dimensions:

- $ZJ1 + S$: Total length of the valve assembly.
- PL : Distance from the mounting flange to the ball.
- V : Distance from the mounting flange to the ball.
- 1 : Distance from the mounting flange to the ball.


Ø pistone	AM	BB	Ø B e9	Ø DD	E	Ø EE	K	Ø KK	KV
32	20	17	25	M6	45	G1/8	6	M10x1,5	17
40	36	17	32	M6	52	G1/4	8	M16x1,5	24
50	36	23	32	M8	65	G1/4	8	M16x1,5	24
63	46	23	45	M8	75	G3/8	10	M20x1,5	30
80	46	28	45	M10	95	G3/8	10	M20x1,5	30
100	63	28	55	M10	115	G1/2	16	M27x2	41
125	63	34	55	M12	140	G1/2	16	M27x2	41
160	85	42	65	M16	180	G3/4	16	M36x2	55
200	85	42	65	M16	220	G3/4	16	M36x2	55

Ø pistone	KW	Ø MM	PL	SW	TG	V	VD	WH	Y
32	5	12	9	8	33	-	15	25	44
40	8	18	12	13	40	3	15	34	65
50	8	18	12	13	49	3	15	34	65
63	10	22	14	17	59	5	20	39	71
80	10	22	14	17	75	9	20	39	71
100	13.5	30	18	22	90	-	20	47	84
125	13.5	30	18	22	110	-	20	47	84
160	18	40	25	32	140	-	25	50	95
200	18	40	25	32	175	-	25	50	95

Ø pistone	ZJ1
32	105
40	144
50	144
63	164
80	164
100	192


Ø pistone	ZJ1
125	192
160	230
200	230

Diagramma di ammortizzamento

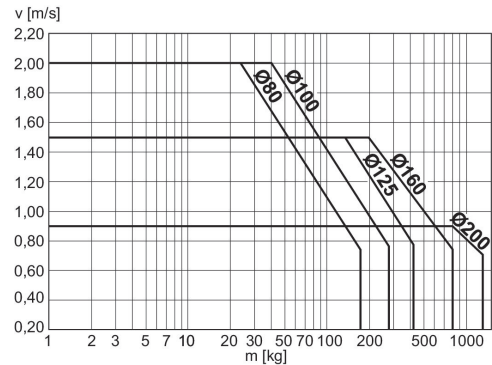

v = velocità pistone [m/s] m = massa ammortizzabile [kg]

Diagramma di ammortizzamento

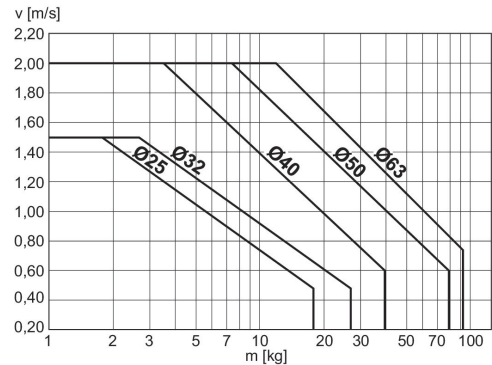

v = velocità pistone [m/s] m = massa ammortizzabile [kg]