


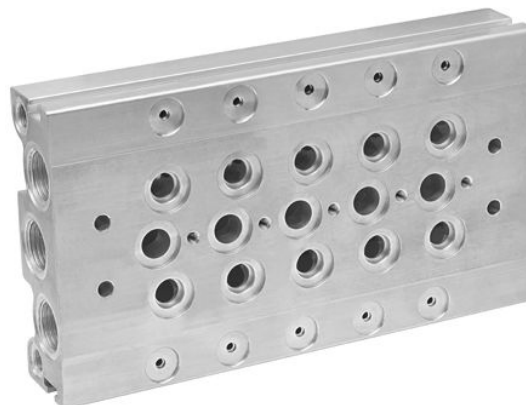

Technical data

Industry

Industrial

Type

Manifold strip

Compressed air connection input

G 1/2

Port exhaust

G 1/2

Exhaust type

Ports separated

Exhaust (3,5)

With directional exhaust (3/5)

Compressed air connection 14

G 1/8

Min. working pressure

-0.95 bar

Max. working pressure

16 bar

Min. ambient temperature

-25 °C

Max. ambient temperature

80 °C

Min. medium temperature

-25 °C

Max. medium temperature

80 °C

Medium

Compressed air

Max. number of valve positions

10

Weight

2.94 kg

Material

Material base plate

Aluminum

Polyoxymethylene

Seal material

Acrylonitrile butadiene rubber

Part No.

8985072102

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

R, P, S subbase, Series CD07

2024-08-07

8985072102

Dimensions

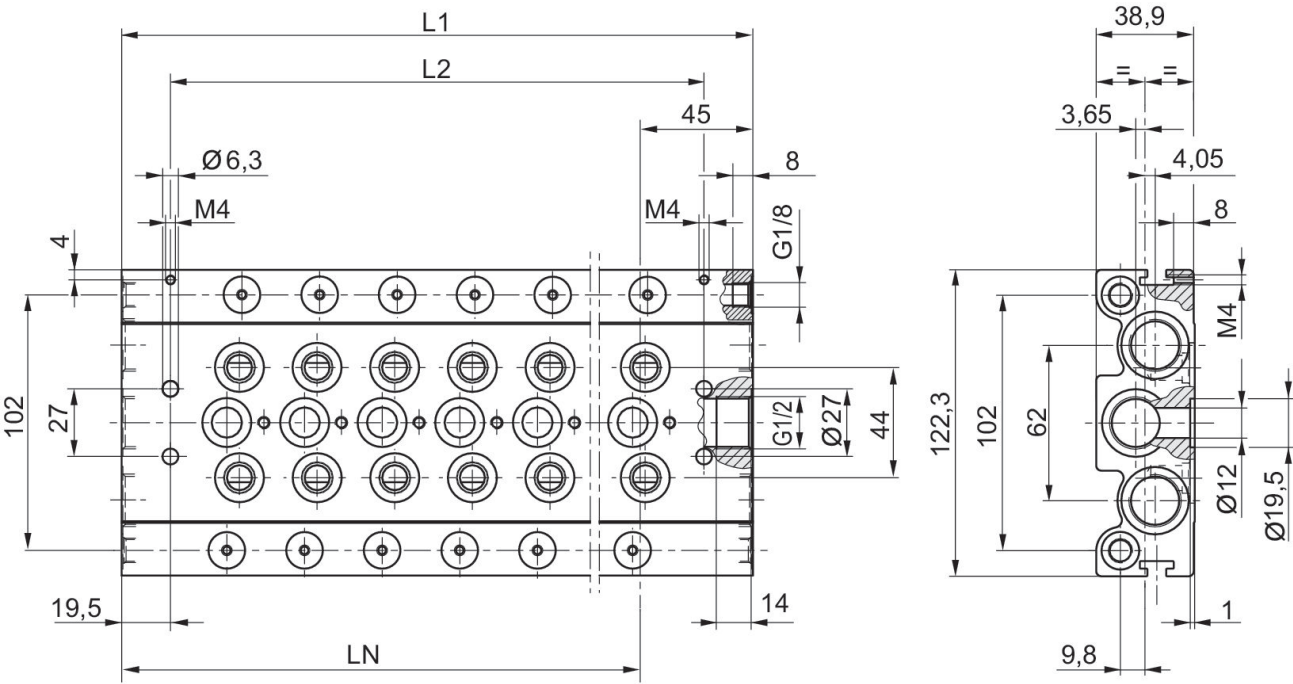

Part No.	L1	L2	LN
8985072042	183	144	138
8985072062	245	206	200
8985072082	307	268	262
8985072102	369	330	324