


Single subbase, ports on side

8985121372

ISO 15407-1, Base and end plates

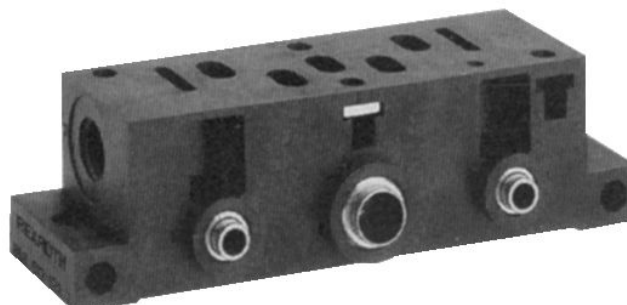

Technical data

Industry
Industrial

Type
Base plate

Direction of pneumatic port (1)
On the side

Compressed air connection input
Ø 6x1

Direction of pneumatic port (2,4)
On the side

Compressed air connection output
Ø 6x1

Direction of pneumatic port (3,5)
On the side

Port exhaust
G 1/8

Frame size
26 mm

Standards
ISO 15407-1

Working pressure min.
-0.95 bar

Working pressure max
16 bar

Min. ambient temperature
-25 °C

Max. number of valve positions
1

Exhaust type
Ports separated

Exhaust (3,5)
With directional exhaust (3/5)

Direction of pneumatic port (12)
On the side

Compressed air connection 12
Ø 4

Direction of pneumatic port (14)
On the side

Compressed air connection 14
Ø 4

Pilot control exhaust
With collective pilot air exhaust

Max. ambient temperature
70 °C

Min. medium temperature
-25 °C

Max. medium temperature
70 °C

Medium
Compressed air

Weight
0.074 kg

Material

Material base plate
Polyamide fiber-glass reinforced

Part No.
8985121372

Seal material
Acrylonitrile butadiene rubber

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions

