

Blanking plate

8985121492



Technical data

Industry
Industrial

Type
Manifold strip

Frame size
26 mm

Max. ambient temperature
50 °C

Standards
ISO 15407-1

Min. medium temperature
-15 °C

Working pressure min.
-0.95 bar

Max. medium temperature
50 °C

Working pressure max
16 bar

Medium
Compressed air

Min. ambient temperature
-15 °C

Max. number of valve positions
1

Tightening torque for mounting screws
2.5 Nm

Grid dimension
27 mm

Weight
0.088 kg

Mounting screw
with hexagon socket

Material

Material base plate
Polyamide fiber-glass reinforced

Part No.
8985121492

Seal material
Acrylonitrile butadiene rubber

Technical information

I/O functionality by combining with contact bridge kit for additional inputs/outputs


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

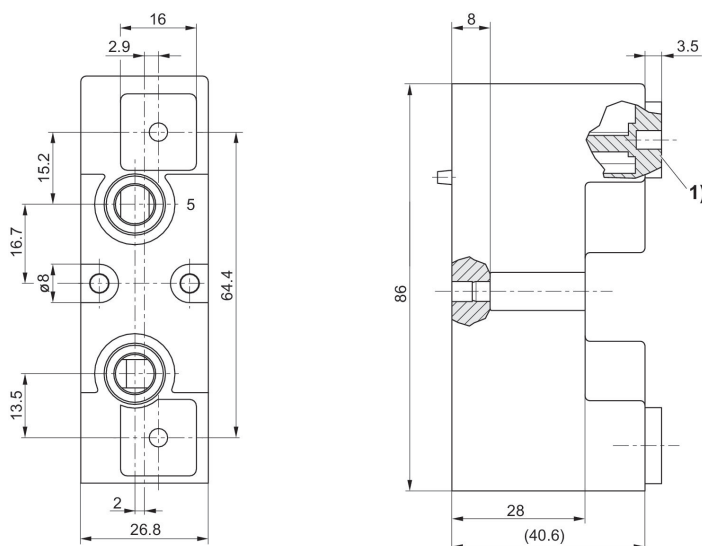

1) Mounting hole for M2.5 thread insert