

Air supply sandwich plate, series XV03

H572AW555464001

2024-06-20



Technical data

Industry

Industrial

Scope of delivery

Sandwich plate, sealing kit, mounting screws

Min. working pressure

-0.95 bar

Max. working pressure

8 bar

Min. ambient temperature

-10 °C

Max. ambient temperature

50 °C

Medium

Compressed air

Min. oil content of compressed air

0 mg/m³

Max. oil content of compressed air

5 mg/m³

Max. number of valve positions

1

Protection class

IP65

Material

Housing material

Aluminum, anodized

Seal material

Hydrogenated nitrile butadiene rubber

Screws material

Stainless Steel

Part No.

H572AW555464001

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

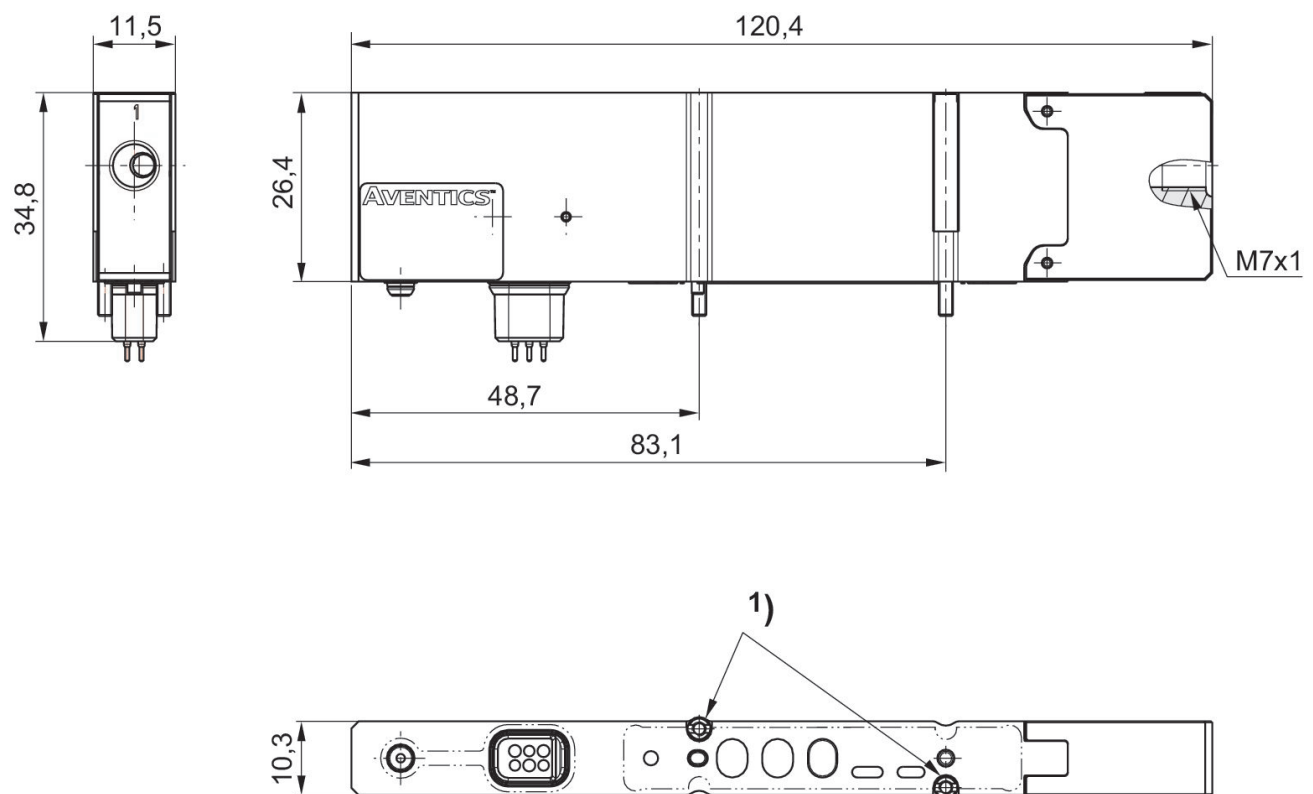

1) Tightening torque: 2 Nm \pm 0.2