Supply plate, series XV03

H572AZ562822001

Valve accessories

2024-06-24

Mechanical accessories



Technical data

Industry

Min. working pressure

-0.95 bar

Max. working pressure

8 bar

Min. ambient temperature

-10 °C

Max. ambient temperature

50 °C

Medium Compressed air

Min. oil content of compressed air 0 mg/m³
Max. oil content of compressed air 5 mg/m³

Max. number of valve positions 1
Protection class IP65

Material

Housing material Aluminum, anodized

Seal material Hydrogenated nitrile butadiene rubber

Screws material Stainless Steel
Part No. H572AZ562822001



Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in https://www.emerson.com/en-us/support).

Dimensions

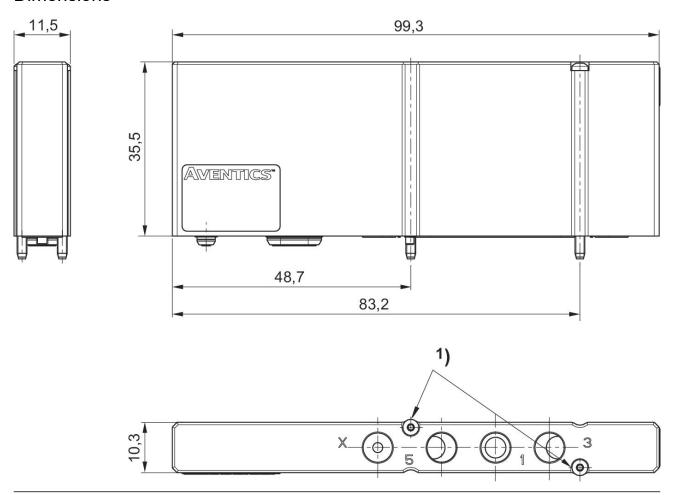

¹⁾ Tightening torque: 2 Nm ±0.2