Bus coupler, Series 580

P580AECH2010A00

2025-02-17

- Dramatically reduces programming and commissioning time
- Achieves up to 15% savings on wiring and components
- Uses native capability of DeltaV for diagnostics of pneumatic valves
- Eliminates need for additional dedicated networks like Profibus-DP for pilot valves and simplifies system I/O mapping



AVENTICS Series 580 Pneumatic Communications Node

The AVENTICS Series 580 fieldbus communications node supports up to 128 AVENTICS 500 Series solenoid valves per valve system in a compact package. It features and integrated graphic display for simple commissioning and display of diagnostic information. The 580 communication node mates to a variety of valve platforms including AVENTICS 501, 502 and 503 series AVENTICS 580 Series communications nodes are ideal for use in automotive, tire, packaging, pharmaceutical processing, food and beverage, fine chemicals, and water/wastewater applications.

Technical data

Industry	Industrial
Fieldbus protocol	DeltaV
Note	Central fieldbus connection without I/O function Power supply plug M12x1, 5-pin
Min. ambient temperature	-10 °C
Max. ambient temperature	50 °C
Max. number of valve positions	43
Operational voltage electronics	24 V DC
Electronics voltage tolerance	-10 % / +10 %
Current consumption electronics	0.3 A
Operating voltage, actuators	24 V DC
Total output for valves	4 A
Protection class	IP65
Diagnosis	Short circuit Overvoltage
Electrical connection type	Plug
Electrical connection size	M12x1
Electrical connection number of poles	5-pin
Electrical connection coding	A-coded
Weight	0.32 kg

Material

Housing material	Die-cast aluminum
Part No.	P580AECH2010A00

Dimensions

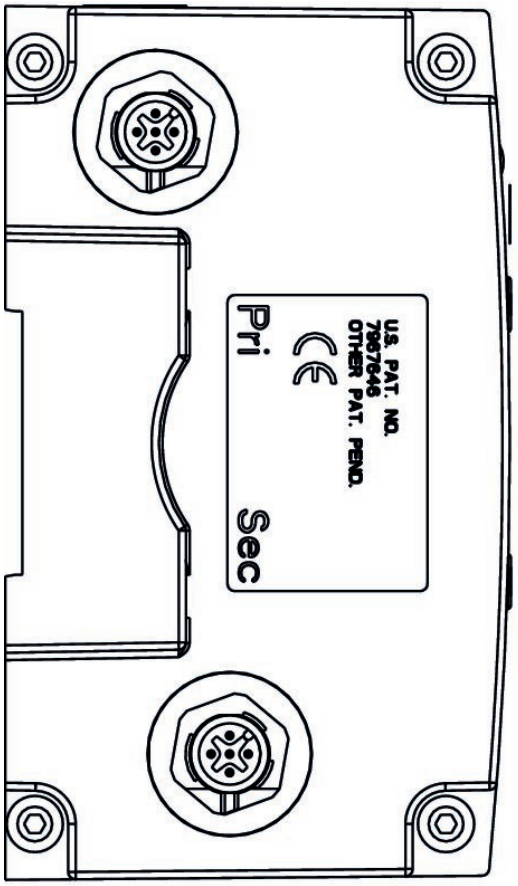
Pri
Sec
U.S. PAT. NO.
7067646
OTHER PAT. PEND.

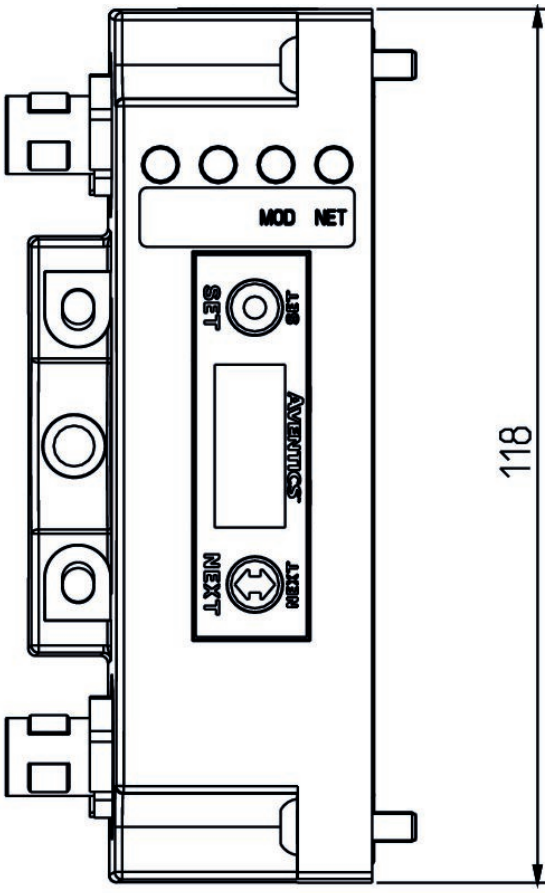
MOD
NET
SET
NEXT
118

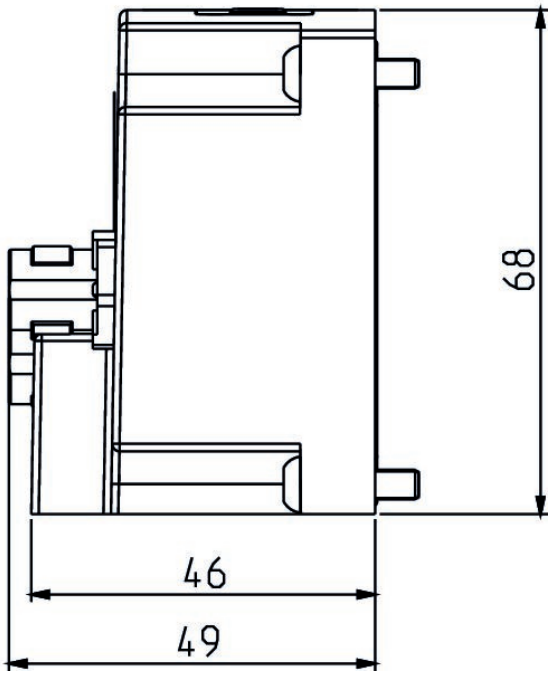
68
46
49