


End position lock, Series LU

R402006027

2024-12-10

Locking units LU1

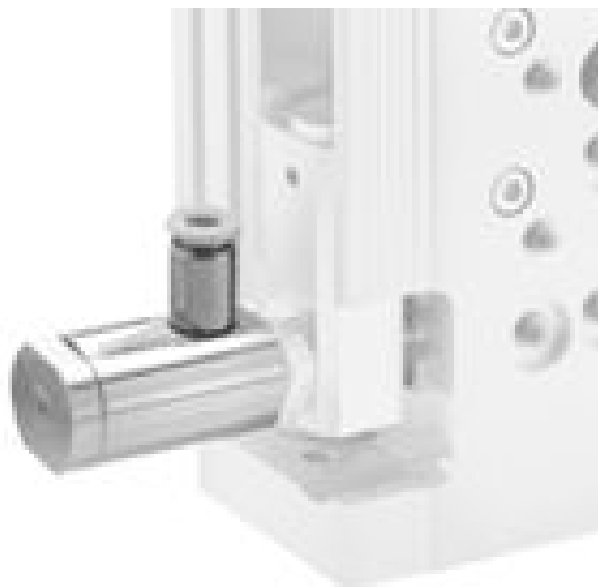

Technical data

Industry	Industrial
Min. release pressure	4.5 bar
Max. release pressure	10 bar
Min. medium temperature	0 °C
Max. medium temperature	60 °C
Medium	Compressed air
Min. ambient temperature	0 °C
Max. ambient temperature	60 °C
Max. permissible useful load MSC	8.5 kg

Material


Part No.	R402006027
----------	------------

End position lock, Series LU

R402006027

2024-12-10

Dimensions

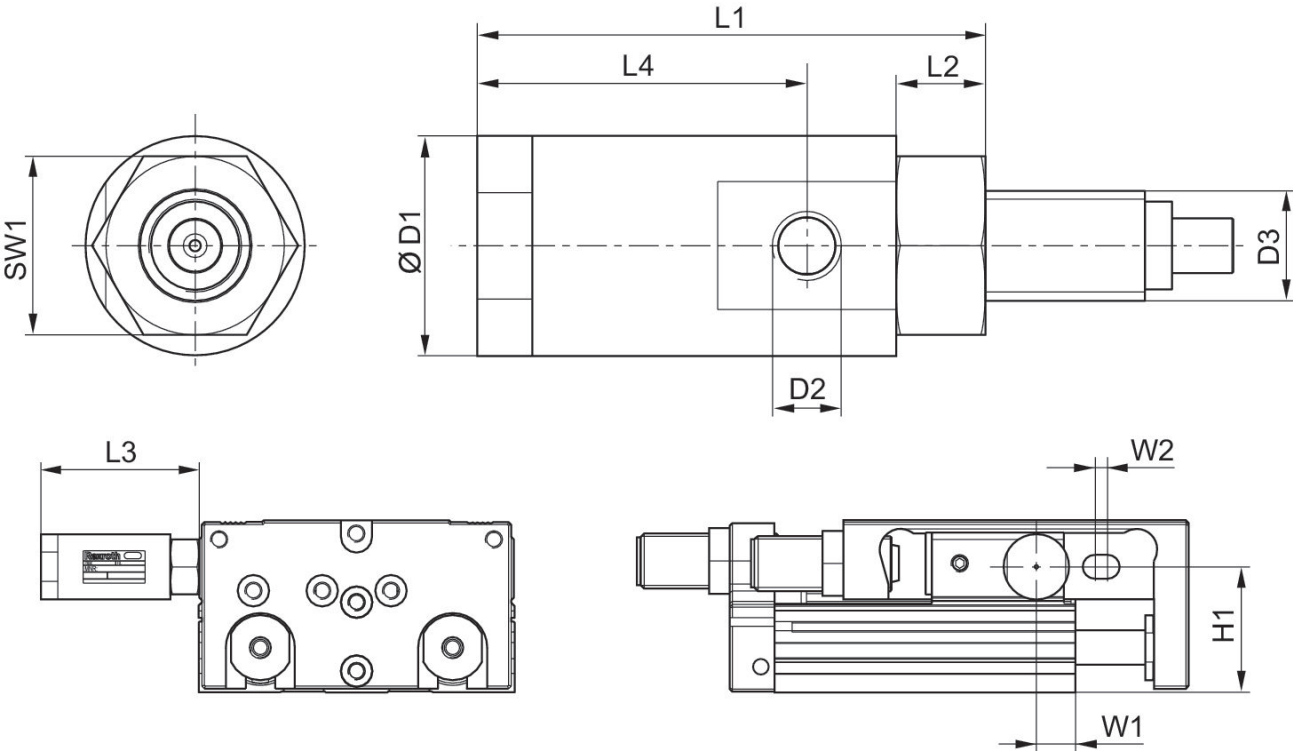

Materialnummer	MSC Ø	Ø D1	D2	D3	H1	L1	L2	L3	L4	SW1
R402006023	8 / 12 / 16	16	M5	M8x1	19,5 / 23 / 28,2	37	6.5	38,3 / 35,3 / 34,5	24	13
R402006027	20 / 25	19	M5	M10x1	36,5 / 42,5	46.2	8.4	42.8	30.3	16

Materialnummer	W1	W2
R402006023	19,3 / 10 / 10	5
R402006027	11,5 / 14,8	3,5 / 5

Stroke setting range for return stroke max. [[5] mm]