


AVENTICS Series AS2 Air Preparation Units

The AVENTICS Series AS2 is a modular, versatile maintenance unit for universal application. This Series offers compact dimensions, is highly efficient, lightweight and easy-to-use. The AVENTICS Series AS guarantees reliability, safety, and efficiency with a simplified assembly and maintenance efforts.

- This modular versatile series allows to combine a huge range of different functions
- Low weight



Technical data

Industry

Note

Parts

Reservoir

Port

Nominal flow Qn

Filter porosity

Condensate drain

Pressure gauge

Min. working pressure

Max. working pressure

Min. ambient temperature

Max. ambient temperature

Min. regulation range

Max. regulation range

Lock type

Type

Type

Industrial

Archive product: Do not use in new constructions!

Filter pressure regulator

reservoir, polycarbonate, with PA protective guard

G 1/4

2100 l/min

5 µm

fully automatic, closed without pressure

without pressure gauge

1.5 bar

16 bar

-10 °C

50 °C

0.5 bar

10 bar

for padlocks

1-part

Can be assembled into blocks

Pressure supply	single
Mounting orientation	vertical
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Filter element	exchangeable
Filter reservoir volume	28 cm ³
Max. achievable compressed air class acc. to ISO 8573-1:2010	6 : 7 : -
Medium	Compressed air Neutral gases
Weight	0.347 kg

Material

Housing material	Polyamide
Seal material	Acrylonitrile butadiene rubber
Material front plate	Acrylonitrile butadiene styrene
Material threaded bushing	Die cast zinc
Material reservoir	Polycarbonate
Material protective guard	Polyamide
Material filter insert	Polyethylene
Part No.	R412006195

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".


Nominal flow Q_n with secondary pressure p₂ = 6 bar at Δp = 1 bar

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Also suitable for separation of fluid oil or water due to the design.


Order pressure gauge separately

Accessories overview

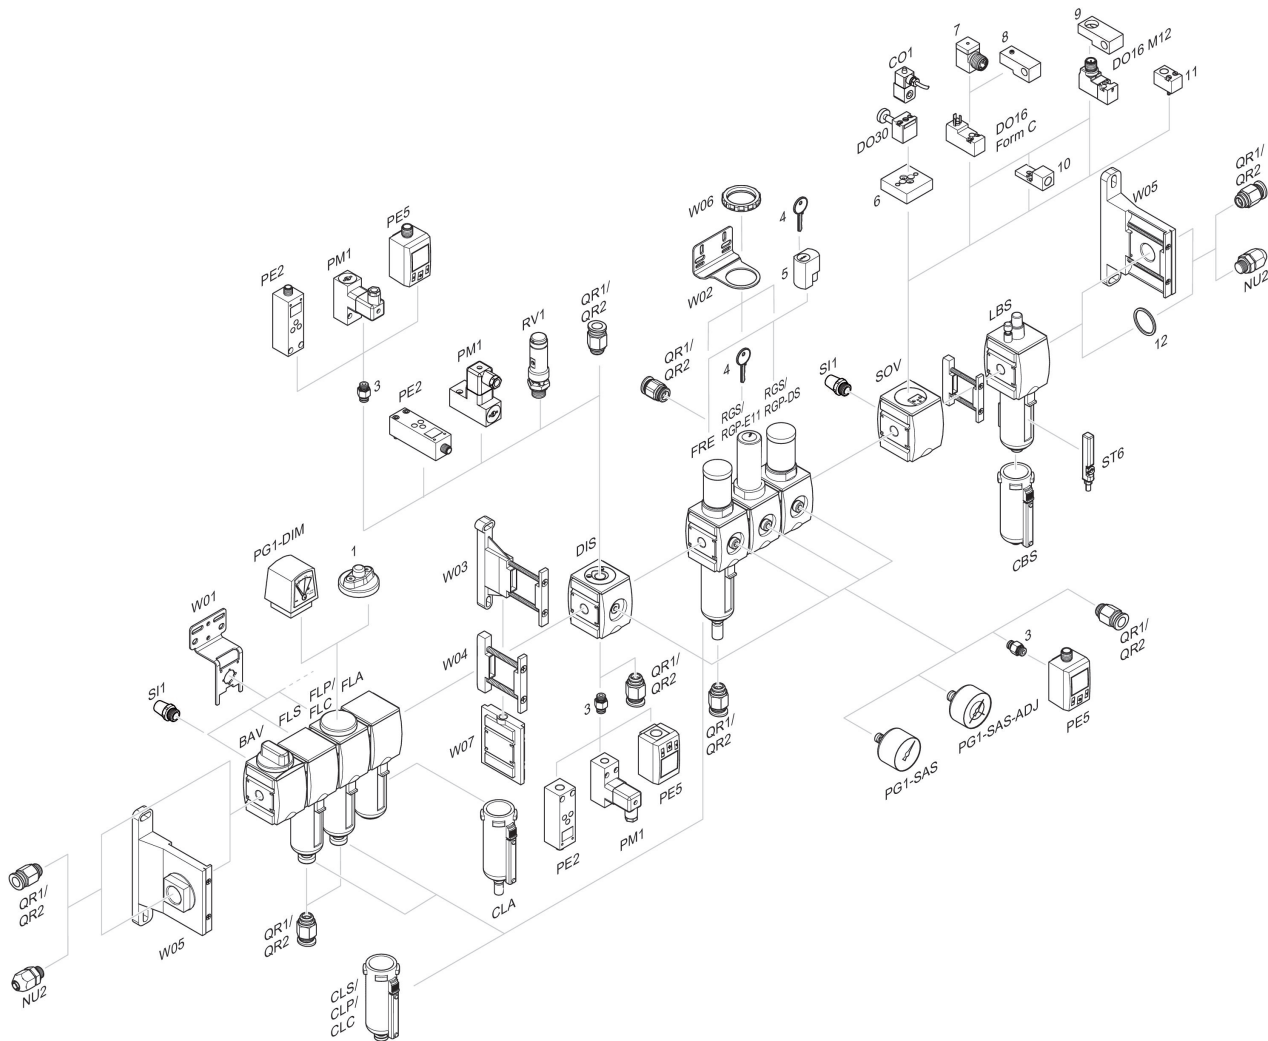

1 = contamination display 3 = Double nipple 4 = Key for E11 locking 5 = mortise lock 6 = Transition plate DO30 7 = Adapter, Series CON-VP 8 = Mounting aid DO16, form C 9 = Mounting aid DO16, M12 10 = Adapter for external pilot air 11 = Adapter pneumatic operation 12 = Sealing ring

Flow rate characteristic, $p_2 = 0,05 - 7$ bar

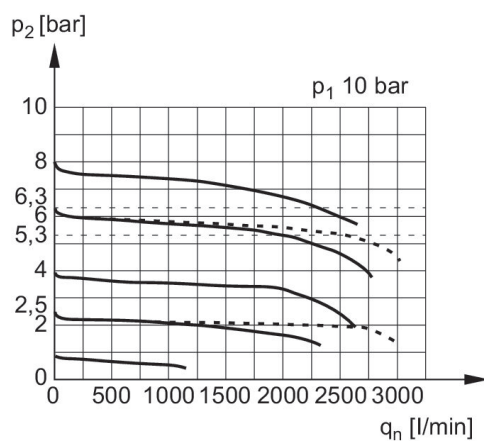

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

R412006195

2026-04-14

Front View:

- Total height: 179 mm
- Top section height: 57,9 mm
- Top section width: 52 mm
- Top connection: M36x1,5
- Main body width: 65 mm
- Inlet: G 1/4
- Outlet: G 1/8
- Trigger gun attachment point: A1
- Spray lance attachment point: A2

Side View:

- Total height: 179 mm
- Top section height: 57,9 mm
- Top section width: 52 mm
- Top connection: M36x1,5
- Main body width: 65 mm
- Inlet: G 1/4
- Outlet: G 1/8
- Trigger gun attachment point: A1
- Spray lance attachment point: A2

Top View:

- Total width: 59 mm
- Top section width: 54 mm
- Top section height: 37 mm
- Main body width: 34 mm
- Inlet: G 1/4
- Outlet: G 1/8
- Trigger gun attachment point: A3
- Spray lance attachment point: A
- Mounting hole diameter: A7

Detail A-A:

- Section through the main body showing internal components.
- Height: 8,5 mm
- Width: 12 mm
- Connection: G 1/8

- AVENTICS