


Valve plug connector, series CON-VP

form C
plug M12
with LED



Technical data

Industry	Industrial
Type	Adapters & contact bridges
Connector standard	EN 175301-803, form C
Shielding	unshielded
with LED	Yellow
Min. ambient temperature	-25 °C
Max. ambient temperature	90 °C
Max. current	1.5 A
Protection class	IP67
Protective circuit	Varistor
Operational voltage	24 V AC/DC
Electrical connection 1, type	Socket
Electrical connection 1, thread size	EN 175301-803, form C
Electrical connection 1, number of poles	2+E
Cable exit	angled
Cable exit angle	90°
Electrical connection 2, type	Plug
Electrical connection 2, thread size	M12x1
Electrical connection 2, number of poles	3-pin

Adapter, Series CON-VP

2024-05-13

R412009553

Electrical connection 2, coding	A-coded
Cable exit	straight
Cable exit angle	180°
Mounting screw tightening torque	0.4 Nm

Material

Housing material	Polyurethane
Seal material	Nitrile butadiene rubber
Part No.	R412009553

Technical information


For security reasons, the valve plug connector must be plugged properly and centrally.
The specified protection class is only valid in assembled and tested state.
design C as per EN 175301-803

Adapter, Series CON-VP

2024-05-13

R412009553

Dimensions

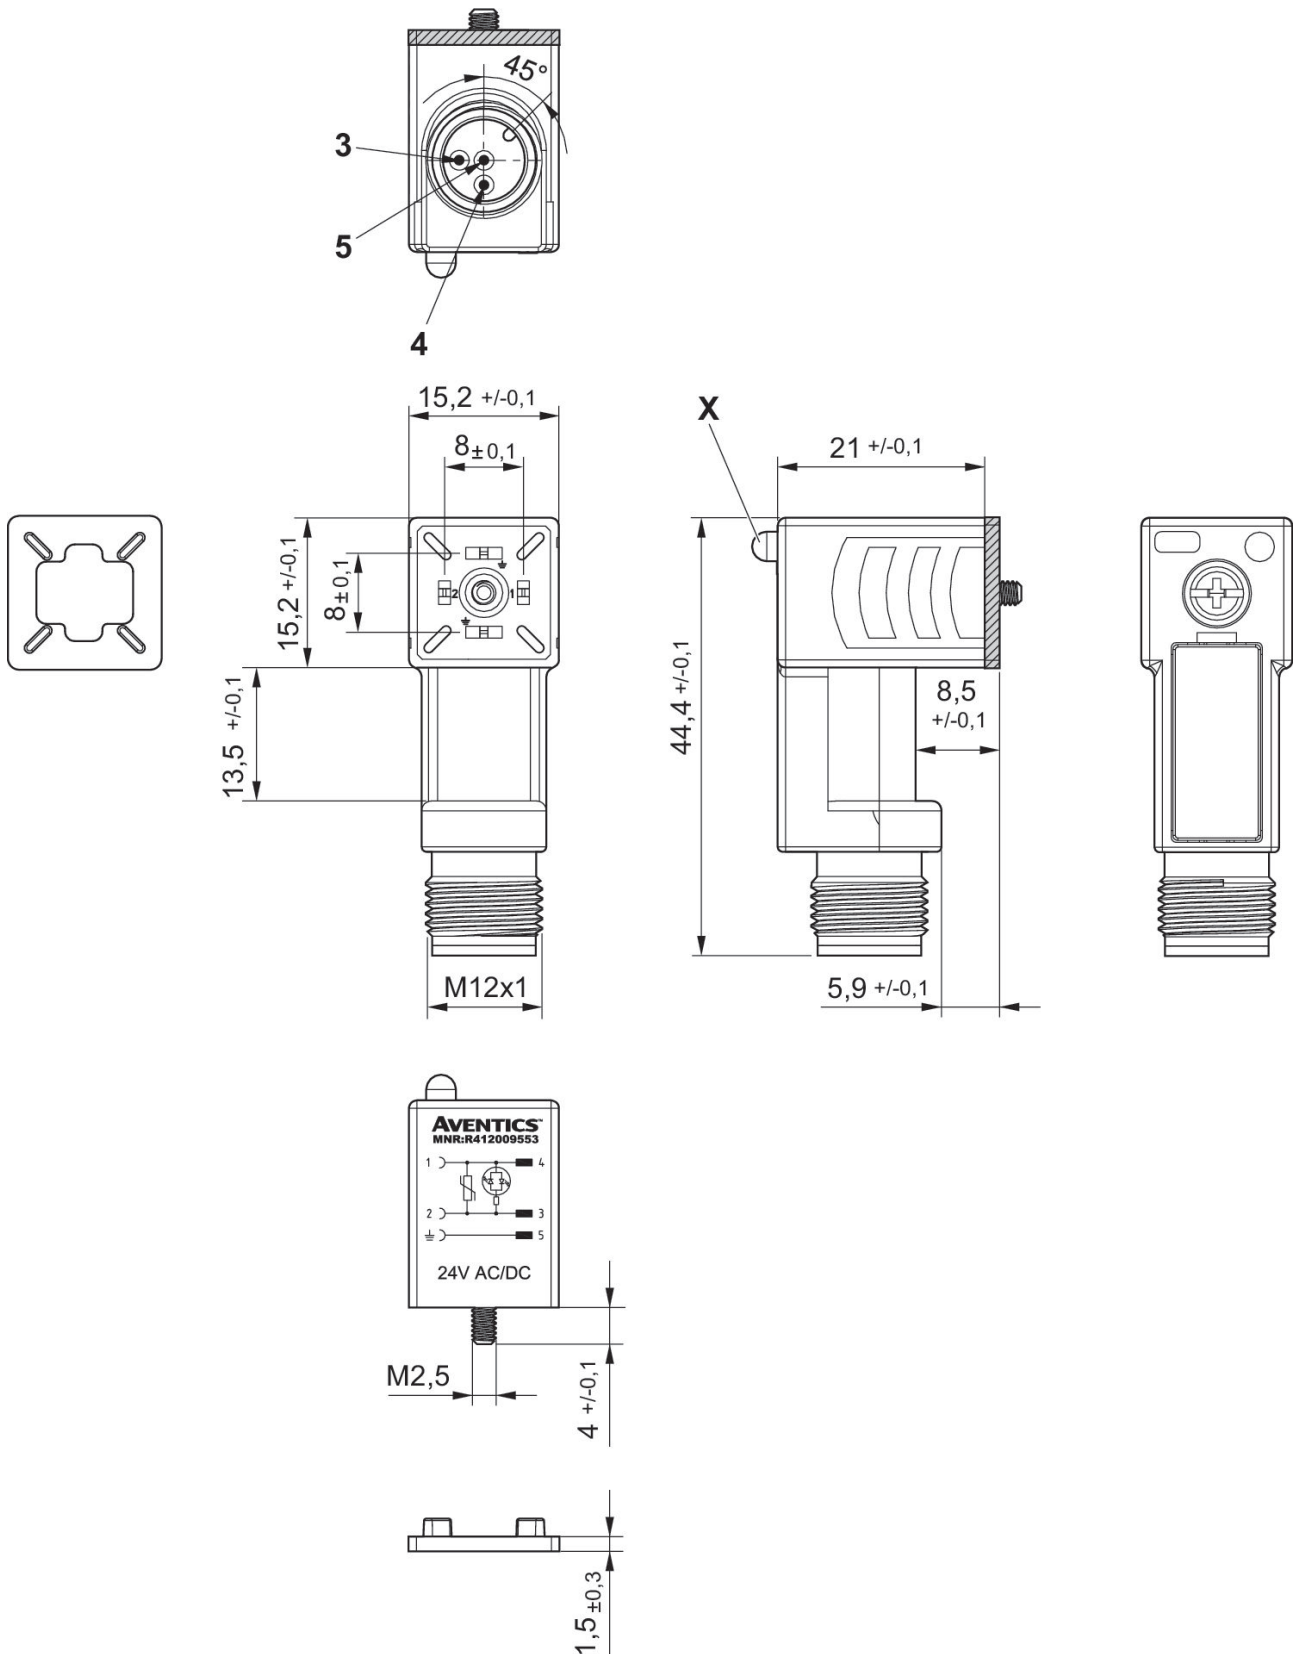

X LED
Flat gasket