


Crosspiece, tapered

2024-03-21

R412010034

AVENTICS Blanking screws and connectors

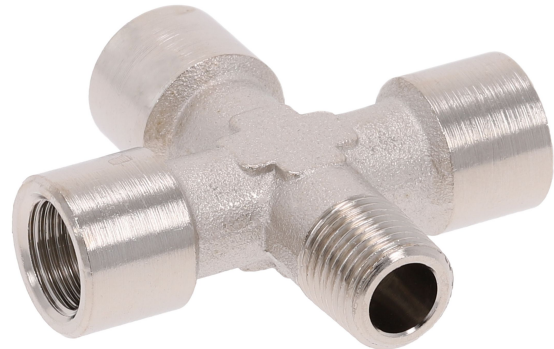

Technical data

Industry	Industrial
Compressed air connection type	Internal thread
Port G	G 1/2
Compressed air connection type 2	External thread
Port D	R 1/2
Type	FPT-S-RXS
Min. working pressure	0 bar
Max. working pressure	16 bar
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Delivery unit	5 piece

Material


Material	Brass
Surface	nickel-plated
Part No.	R412010034

Dimensions

Crosspiece, tapered

2024-03-21

R412010034



Part No.	Port D	Port G	A	B	C	R	E	F	SW
R412010031	G 1/8	R 1/8	13	8	18.5	42	6	39.5	10
R412010032	G 1/4	R 1/4	17	11	23.5	51	8	49.5	13
R412010033	G 3/8	R 3/8	21	11.5	26	56	11	54	17
R412010034	G 1/2	R 1/2	26	14.5	31	67	15	64	21