AVENTICS Series SA1 Industrial shock absorbers

The AVENTICS Series SA1 industrial shock absorbers decelerate reliably moving masses and thereby increase process speed, production quality, the service life of production facilities and reduce operating noise.



Technical data				
Industry	Industrial			
Туре	SA1-MC			
Mounting thread	M8x1			
Stroke	5 mm			
Max. energy absorption/stroke	1.5 Nm			
Max. energy absorption/hour	4000 Nm			
Cushioning	self-compensating			
Medium	Oil			
Min. ambient temperature	-20 °C			
Max. ambient temperature	80 °C			
Effective mass m _e min.	0.8 kg			
Effective mass m _e max.	6 kg			
Min. return spring force	2 N			
Max. return spring force	5 N			
Mounting	Lock nut			
Weight	0.007 kg			

Material

Material cylinder tube

Steel, chrome-plated



Industrial shock absorber, Series SA1-MC


R412010287

Surface cylinder tube Material piston rod Surface piston rod Material sealing for piston rod Material stop

Material lock nut Surface lock nut Part No.

salt bath nitrocarburized **Stainless Steel** ground and hardened Acrylonitrile butadiene rubber Polyurethane Steel, chrome-plated Steel, chrome-plated salt bath nitrocarburized R412010287

Dimensions

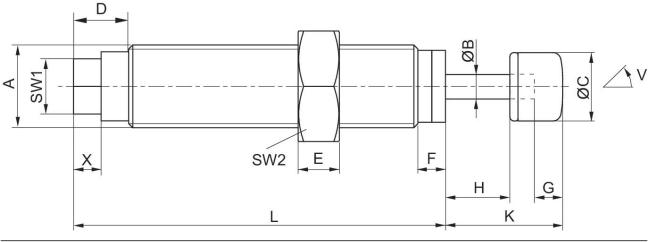

A = mounting thread V = tilt

Part No.	Туре	Mount- ing thread	ØB	ØC	D	E	F	G	Н
R412010286	SA1-MC	M8x1	2.3	6.5	6	3	2.5	3	5
R412010287	SA1-MC	M8x1	2.3	6.5	6	3	2.5	3	5
							-	-	
Part No.	К		SW1	SW2	W [°]	Х			
R412010286	11.5	30	5.5	11	3	3]		
R412010287	11.5	30	5.5	11	3	3			