

Bus coupler, Series CL03

R412023892

2024-12-10

Link structure BDC



Technical data

Industry	Industrial
Type	inch
Fieldbus protocol	EtherNet/IP
Min. ambient temperature	0 °C
Max. ambient temperature	50 °C
Operational voltage electronics	24 V DC
Protection class	IP69K
Communication port 1, Type	Socket
Communication port 1, Thread size	M12
Communication port 1, Number of poles	5-pin
Communication port 1, Coding	D-coded
Communication port 2, Type	Socket
Communication port 2, Thread size	M12
Communication port 2, Number of poles	5-pin
Communication port 2, Coding	D-coded
Electrical connection type	Plug
Electrical connection size	M12
Electrical connection number of poles	4-pin
Electrical connection coding	A-coded

Bus coupler, Series CL03

R412023892

2024-12-10

Weight 0.7 kg

Material

Housing material

Polyamide fiber-glass reinforced

Stainless Steel


Seal material

Hydrogenated acrylonitrile butadiene rubber

Part No.

R412023892

Dimensions

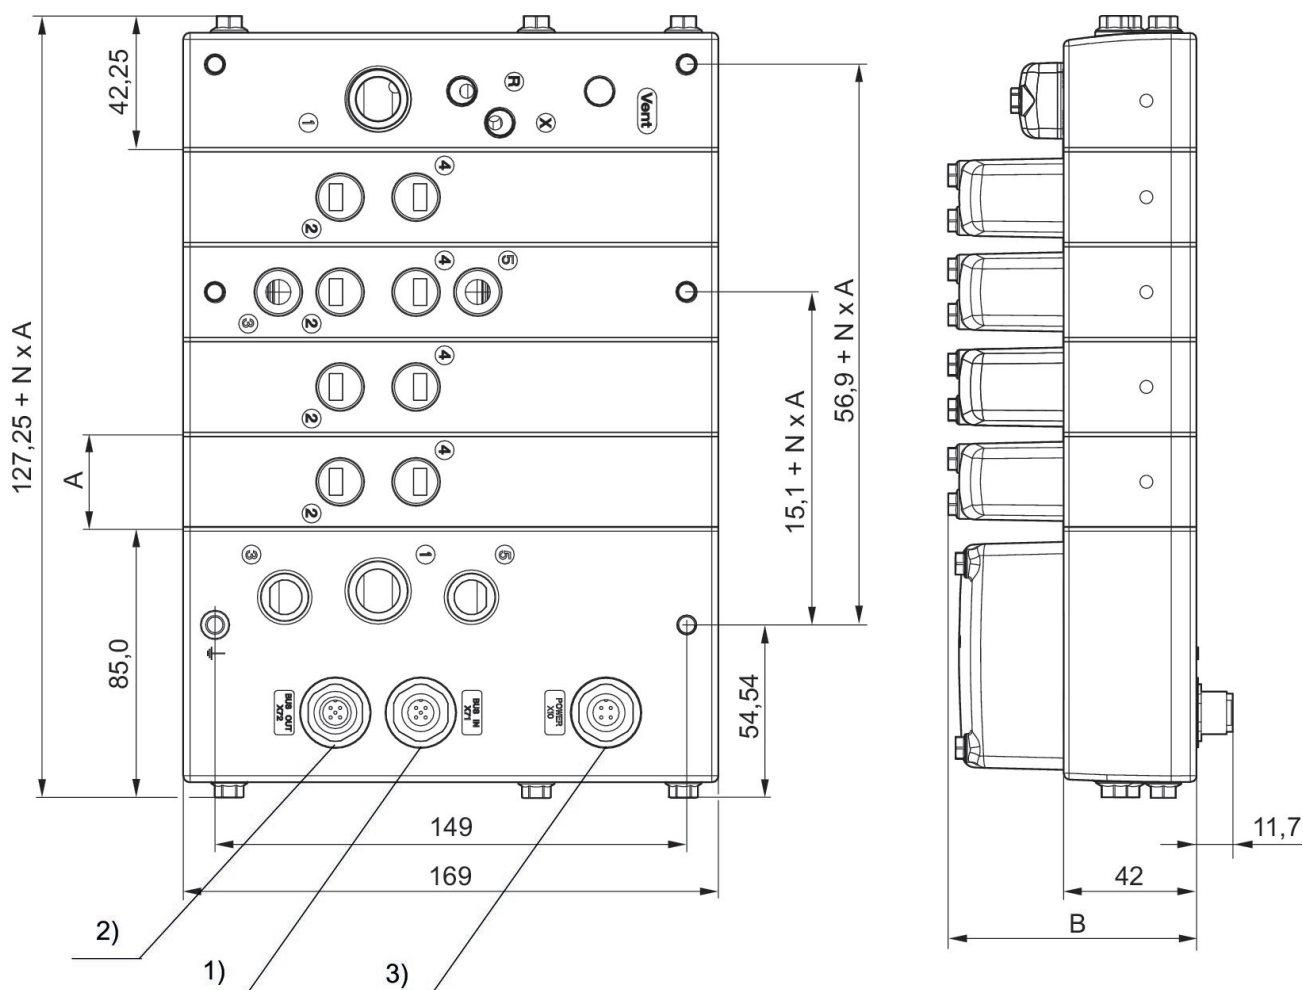

CL03:A = 30,0 mm B = 78,5 mm CL03-CL:A = 36,0 mm B = 89,15

1) Connection 1 bus IN 2) Connection 2 bus OUT 3) Power supply