

- Robust poppet valve technology
- Very high control precision and dynamics
- Suitable for a wide range of applications
- High air flow rates
- ED07 supports different types of connectivity from Analog Version to Fieldbus connection via EtherCAT

## AVENTICS ED07 Dynamic Direct Acting Pressure Regulator

The AVENTICS Series ED07 offers proportional pressurization and the exhaust valves are controlled separately to deliver dynamic control for the most demanding applications.

Highly dynamic proportional pressure regulator



Stackable with base plate

Nominal width 7

Flow 1300 l/min

Pressure range -1 ... 20 bar

EtherCAT, AES fieldbus connection

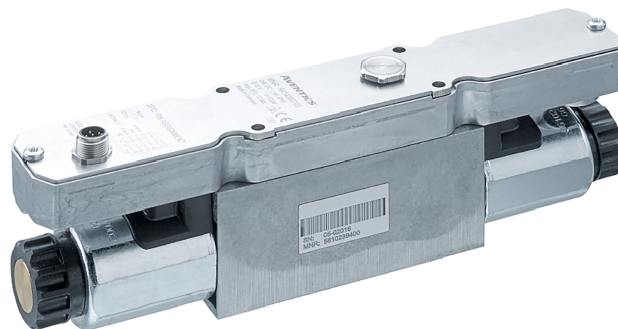

## Technical data

|                          |                                          |
|--------------------------|------------------------------------------|
| Type                     | Current control with actual output value |
| Control                  | Directly controlled                      |
| Control                  | Analog                                   |
| Function                 | Air exhaust                              |
| Output signal            | Analog                                   |
| Operational voltage DC   | 24 V                                     |
| Max. current consumption | 1400 mA                                  |
| Actual output value      | 0 ... 20 mA                              |
| Nominal input value      | 0 ... 20 mA                              |
| Min. regulation range    | 0 bar                                    |
| Max. regulation range    | 16 bar                                   |
| Min. working pressure    | 0.5 bar                                  |
| Max. working pressure    | 18 bar                                   |
| Hysteresis               | < 0,04 bar                               |
| Medium                   | Compressed air                           |
| Nominal flow Qn          | 1300 l/min                               |
| Min. ambient temperature | 5 °C                                     |
| Max. ambient temperature | 50 °C                                    |
| Min. medium temperature  | 5 °C                                     |

# E/P pressure regulator, Series ED07

R414000770

Series

ED07

2025-05-09

|                                    |                                                          |
|------------------------------------|----------------------------------------------------------|
| Max. medium temperature            | 50 °C                                                    |
| Protection class                   | IP65                                                     |
| Permissible ripple                 | 5%                                                       |
| Max. particle size                 | 50 µm                                                    |
| Min. oil content of compressed air | 0 mg/m <sup>3</sup>                                      |
| Max. oil content of compressed air | 1 mg/m <sup>3</sup>                                      |
| Type                               | Poppet valve                                             |
| Mounting orientation               | $\alpha = 0 \dots 90^\circ \pm \beta = 0 \dots 90^\circ$ |
| Certificates                       | CE declaration of conformity                             |
| Electrical connection size         | via signal connection                                    |
| Signal connection                  | input and output                                         |
| Signal connection                  | Plug                                                     |
| Signal connection                  | M12                                                      |
| Signal connection                  | 5-pin                                                    |
| Industry                           | Industrial                                               |
| Weight                             | 2.05 kg                                                  |

## Material

|                  |                                             |
|------------------|---------------------------------------------|
| Housing material | Die-cast aluminum<br>Steel, chrome-plated   |
| Seal material    | Hydrogenated acrylonitrile butadiene rubber |
| Part No.         | R414000770                                  |

## Technical information

With oil-free, dry air, other installation positions are possible on request.

The protection class is only ensured when the plug is mounted properly. For detailed information, see operating instructions.

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).


# E/P pressure regulator, Series ED07

R414000770

Series  
ED07

2025-05-09

## Dimensions

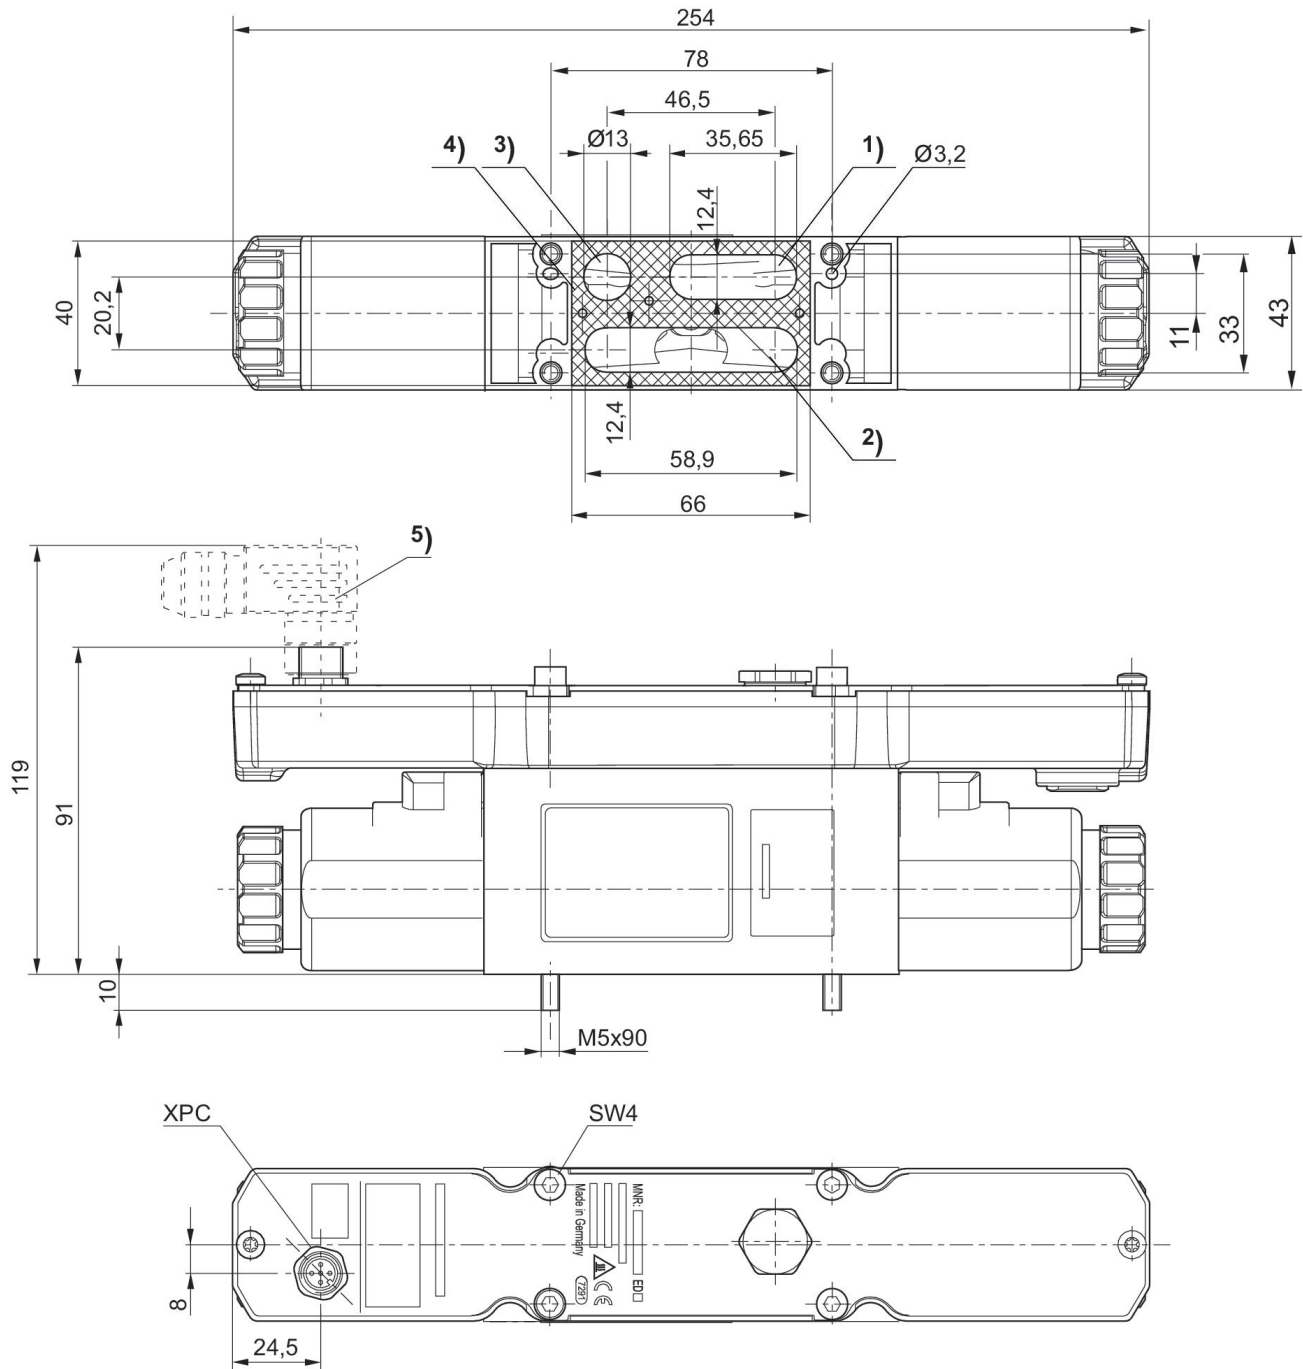

- 1) Operating pressure
- 2) Working pressure
- 3) Exhaust
- 4) Profile seal
- 5) Accessories not supplied

# E/P pressure regulator, Series ED07


R414000770

Series  
ED07


2025-05-09

## Mounting orientation

$$\beta = \pm 0 \dots 90^\circ$$

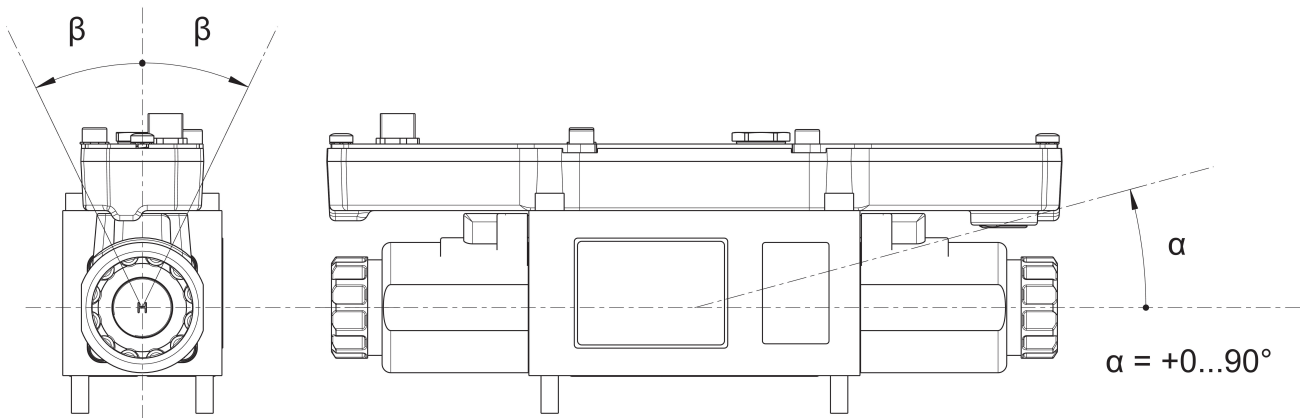



## Functional diagram

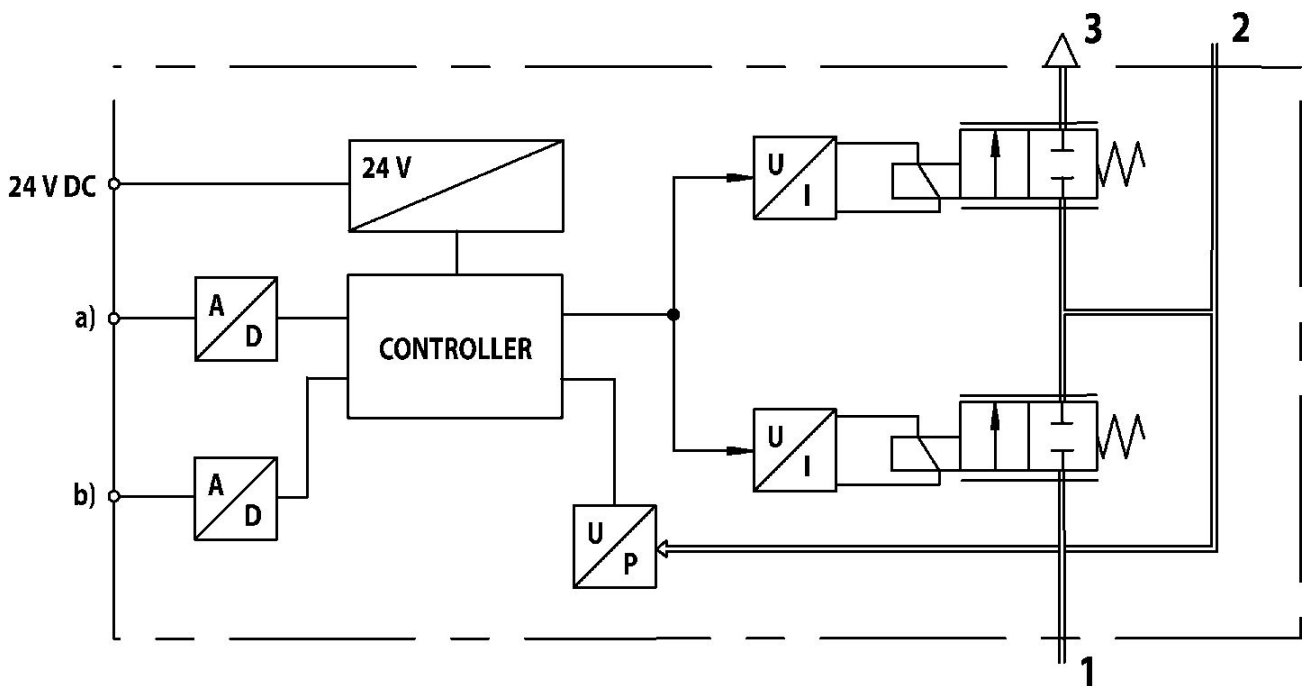

a) Nominal input value b) Actual output value The E/P pressure control valve modulates the pressure corresponding to an analog electrical nominal input value.

- 1) Operating pressure
- 2) Working pressure
- 3) Exhaust

## Characteristic and pin assignment for current control with actual output value

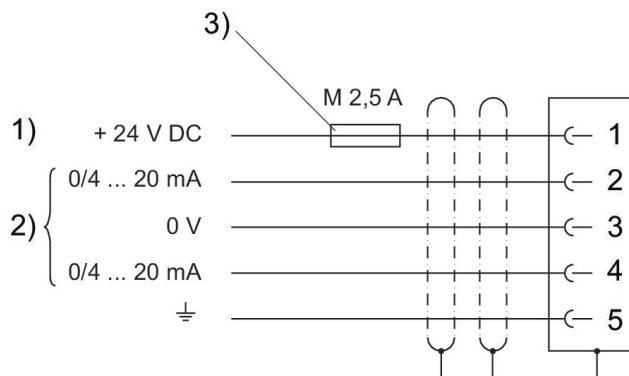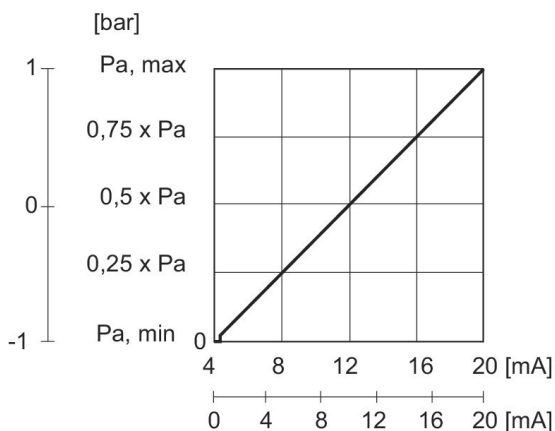


1) Supply Voltage

2) Actual value (pin 4) and nominal value (pin 2) are related to 0 V (control voltage). Nominal input value current (ohmic load 100  $\Omega$ ). Actual output value (max. total resistance of downstream devices < 300  $\Omega$ ).

3) The operating voltage must be protected by an external M 2.5 A fuse. Connect the plug via a shielded cable to ensure EMC.

## Flow diagram

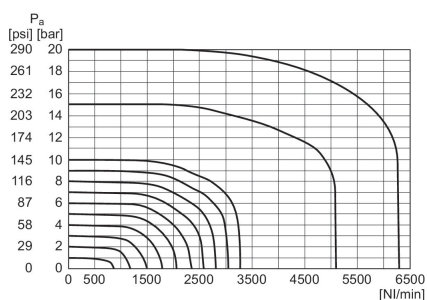

Pa = Working pressure